



# AUT100

UTILITY TRACK LOADER

1,000-LB CAPACITY. STAND-ON CONTROL.

3-YEAR / 3,000-HOUR LIMITED WARRANTY



A compact stand-on track loader with 1,000 lb rated capacity, 25 hp Kubota diesel power and 13.5 gpm auxiliary flow.

**25**

POWER (HP)

**3,066 LB**

OPERATING WEIGHT

**1,000 LB**

RATED CAPACITY

**13.5 GPM**

AUXILIARY FLOW

## PRODUCT HIGHLIGHTS

**1**

### 25 HP KUBOTA DIESEL

Kubota D1105 power delivers 52 lb-ft of torque for demanding work.

**2**

### ISO JOYSTICK CONTROL

Dual-axis pilot controls support precise, low-fatigue operation.

**3**

### ATTACHMENT READY

CII mounting and 13.5 gpm auxiliary flow power versatile tools.



**BUILT TO WORK. SUPPORT FIRST.**

**ATLASIRONCE.COM**

Specifications are subject to change without notice. Images may show optional configurations.



TECHNICAL SPECIFICATIONS

**1,000 LB**  
RATED CAPACITY

**3,066 LB**  
OPERATING WEIGHT

**13.5**  
AUX FLOW (GPM)

| ENGINE               |                             |            |
|----------------------|-----------------------------|------------|
| Engine Brand / Model | Kubota D1105                |            |
| Engine Type          | Water-cooled 4-cycle diesel |            |
| Gross Power          | hp/rpm                      | 25 / 3,000 |
| Displacement         | L                           | 1.123      |
| Maximum Torque       | lb-ft                       | 52         |

| OPERATING SPECIFICATIONS |     |       |
|--------------------------|-----|-------|
| Rated Operating Capacity | lb  | 1,000 |
| Tipping Load             | lb  | 2,857 |
| Travel Speed             | mph | 4.16  |
| Ground Pressure          | psi | 4.12  |


| CAPACITY & LIFT              |     |      |
|------------------------------|-----|------|
| Bucket Capacity              | ft3 | 6.53 |
| Hinge Pin Height at Max Lift | in  | 83.5 |

| DIMENSIONS                      |    |       |
|---------------------------------|----|-------|
| Overall Length with Bucket      | in | 109   |
| Overall Length without Bucket   | in | 83    |
| Overall Height                  | in | 51.6  |
| Overall Width with Bucket       | in | 43.7  |
| Overall Width without Bucket    | in | 35.87 |
| Reach at Max Lift / 45-deg Dump | in | 19.2  |

| WEIGHTS & UNDERCARRIAGE     |    |       |
|-----------------------------|----|-------|
| Weight with Standard Bucket | lb | 3,066 |
| Weight without Bucket       | lb | 2,895 |
| Track Width                 | in | 7.87  |

| OPERATING WEIGHT |    |       |
|------------------|----|-------|
| Operating Weight | lb | 3,066 |

DETAILS

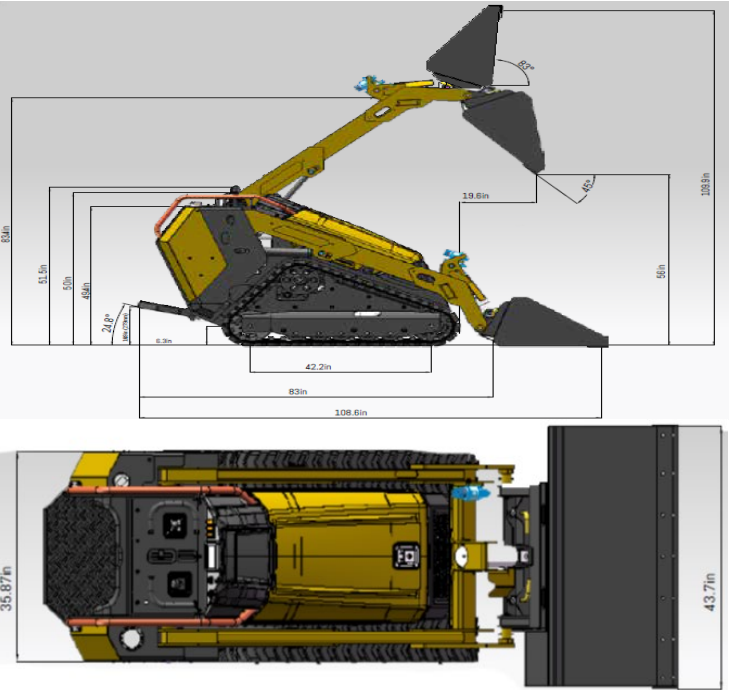

| OPERATION & DRIVE  |                   |      |
|--------------------|-------------------|------|
| Steering / Drive   | Pilot joystick    |      |
| Lift / Tilt        | Manual joystick   |      |
| Transmission       | Hydrostatic drive |      |
| Attachment Control | One-lever detent  |      |
| Mounting System    | CII               |      |
| Ground Clearance   | in                | 6.30 |
| Angle of Departure | deg               | 24.8 |
| Wheelbase          | in                | 42   |

| HYDRAULIC & SERVICE       |     |       |
|---------------------------|-----|-------|
| Auxiliary Flow            | gpm | 13.5  |
| Auxiliary Pressure        | psi | 2,828 |
| Fuel Tank Capacity        | gal | 8.32  |
| Hydraulic System Capacity | gal | 5.54  |
| Battery Capacity          | V   | 12    |