# AX10

## COMPACT EXCAVATOR

ULTRA-COMPACT POWER FOR TIGHT-ACCESS JOBSITES.

**3-YEAR / 3,000-HOUR LIMITED WARRANTY**




**A 2,200 lb compact excavator designed for tight access, precise grading and dependable daily operation.**

| 11 HP | 2,200 LB | 72 IN | 2,068 LBF |
|---|---|---|---|
| RATED POWER | OPERATING WEIGHT | MAX DIGGING DEPTH | DIGGING FORCE |

## PRODUCT HIGHLIGHTS

1. **KUBOTA D722 ENGINE**
   Three-cylinder, water-cooled diesel power with low noise and efficient operation.
2. **LED WORK LIGHTS**
   High-intensity lighting improves visibility, safety and productivity in low-light work.
3. **BACKFILL BLADE**
   Hydraulic control adds stability and precision for grading, leveling and backfilling.





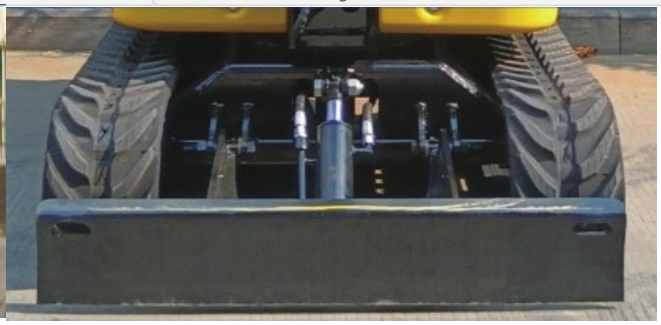



*Specifications are subject to change without notice. Images may show optional configurations.*

# TECHNICAL SPECIFICATIONS

| 2,200 LB | 72 IN | 2,068 |
|---|---|---|
| OPERATING WEIGHT | MAX DIGGING DEPTH | DIGGING FORCE (LBF) |

## ENGINE

| | | |
|---|---|---|
| Engine Brand / Model | | Kubota D722 |
| Maximum Power | hp | 11 |
| Maximum Speed | rpm | 2,500 |
| Displacement | gal | 0.19 |
| Number of Cylinders | | 3 |

## OPERATING SPECIFICATIONS

| | | |
|---|---|---|
| Bucket Capacity | ft3 | 0.49 |
| Travel Speed | mph | .93 |
| Gradeability | % | 30 |
| Ground Pressure | psi | 3.7 |

## DIGGING PERFORMANCE

| | | |
|---|---|---|
| Maximum Digging Force | lbf | 2,068 |
| Maximum Digging Radius | in | 127 |

## WORKING RANGE

| | | |
|---|---|---|
| Maximum Digging Depth | in | 72 |
| Maximum Digging Height | in | 118 |
| Maximum Unloading Height | in | 88 |
| Bucket Width | in | 11.8 |
| Boom Length | in | 58.1 |
| Stick Length | in | 31.5 |

## TRANSPORT DIMENSIONS

| | | |
|---|---|---|
| Transport Length | in | 95 |
| Transport Width | in | 35 |
| Transport Height | in | 86 |

## OPERATING WEIGHT

| | | |
|---|---|---|
| Operating Weight | lb | 2,200 |

## DETAILS

## DIMENSIONS & SUPPORT

| | | |
|---|---|---|
| Backfill Blade Width | in | 35 |
| Cooling Method | | Water cooled |
| Engine Oil Change Amount | gal | 0.9 |
| Fuel Type | | Diesel |
| Fuel Grade | | 0/-10 |
| Theoretical Fuel Consumption | L/h | 1.1-1.5 |
| Travel Hydraulic Motor | | WDM-300 |
| Travel Motor Displacement | in3 | 19.2 |

## HYDRAULIC & DRIVE

| | | |
|---|---|---|
| Main Pump Type / Model | | Gear Pump / 306 |
| Main Pump Brand | | TianJin Walking |
| Main Pump Maximum Flow | gpm | 4.76 |
| Multi-Way Valve | | 2+2+5 multi-way valve |
| Rated / Maximum Pressure | psi | 2,466 / 2,611 |



*Specifications are subject to change without notice. Images may show optional configurations.*