AX15

COMPACT EXCAVATOR

RETRACTABLE TRACKS WITH KUBOTA POWER.

3-YEAR / 3,000-HOUR LIMITED WARRANTY





A 3,000 lb excavator combining pilot control, track-width flexibility and durable undercarriage support.

13.7	3,000 LB	70 IN	2,338 LBF
POWER (HP)	OPERATING WEIGHT	MAX DIGGING DEPTH	DIGGING FORCE

PRODUCT HIGHLIGHTS

1. **KUBOTA D722 ENGINE**
   Efficient, low-vibration diesel power supports dependable daily performance.
2. **RETRACTABLE TRACKS**
   Adjustable track width improves access while supporting a stable working stance.
3. **ENHANCED TRACK SUPPORT**
   Reinforced undercarriage support improves durability across demanding





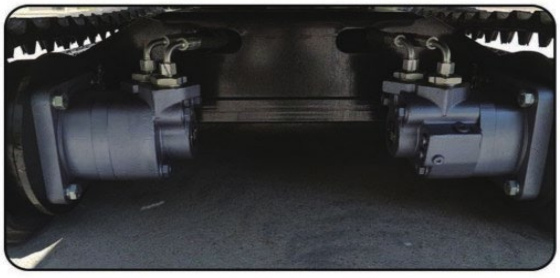

Specifications are subject to change without notice. Images may show optional configurations.

TECHNICAL SPECIFICATIONS

3,000 LB	70 IN	2,338
OPERATING WEIGHT	MAX DIGGING DEPTH	DIGGING FORCE (LBF)

ENGINE

Engine Brand / Model		Kubota D722
Maximum Power	hp	13.7
Maximum Speed	rpm	2,500
Displacement	gal	0.19
Number of Cylinders		3

OPERATING SPECIFICATIONS

Bucket Capacity	ft3	1.4
Travel Speed	mph	.93
Gradeability	%	30
Ground Pressure	psi	4.6

DIGGING PERFORMANCE

Maximum Digging Force	lbf	2,338
Maximum Digging Radius	in	127

WORKING RANGE

Maximum Digging Depth	in	70
Maximum Digging Height	in	117
Maximum Unloading Height	in	80
Bucket Width	in	15.7
Boom Length	in	58.1
Stick Length	in	31.5

TRANSPORT DIMENSIONS

Transport Length	in	91
Transport Width	in	37
Transport Height	in	88.3

OPERATING WEIGHT

Operating Weight	lb	3,000

DETAILS

DIMENSIONS & SUPPORT

Backfill Blade Width	in	41
Cooling Method		Water cooled
Engine Oil Change Amount	gal	0.9
Fuel Type		Diesel
Fuel Grade		0/-10
Theoretical Fuel Consumption	L/h	1.1-1.5
Travel Hydraulic Motor		BM6-315
Travel Motor Displacement	in3	19.2

HYDRAULIC & DRIVE

Main Pump Type / Model		Gear Pump / 310
Main Pump Brand		TianJin Walking
Main Pump Maximum Flow	gpm	6
Multi-Way Valve		8-way pilot valve
Rated / Maximum Pressure	psi	2,611 / 2,900

Specifications are subject to change without notice. Images may show optional configurations.