

Harness the *power* of **Braemar**

By **SEELEY INTERNATIONAL** 

100%
Australian
owned!

flexible heating & cooling


- Ducted with zone control
- Split systems
- Multi split systems
- Add-on cooling

100%
comfort in all conditions



World-leading climate control solutions

Reverse Cycle Air Conditioning

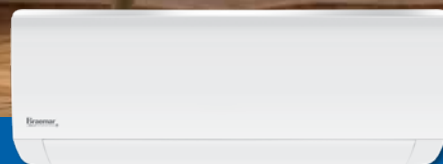

Braemar
By **SEELEY INTERNATIONAL** 

The Braemar *difference*



Range

Braemar offers a comprehensive range to suit all requirements



Quality

80 year history of Braemar excellence and reliability!
Leading technology and innovation come as standard



Australian owned

Seeley International, Australia's leading cooling and heating manufacturer



Environment

The single phase ducted reverse cycle air conditioner uses the latest eco-friendly R32 refrigerant



Cost effective

MEPS (Minimum Energy Performance Standards) compliant
DRED (Demand Response Enabling Device) capability



Warranty

Quality that lasts – 5 year comprehensive manufacturer's warranty
A network of highly professional dealers and service agents throughout Australia

The Braemar inverter product range is sourced from the world's largest residential manufacturer of reverse cycle air conditioning systems – Gree.

It is backed up by world class Australian manufacturer, Seeley International, providing leading-edge local service and support.

“ Seeley International never stops striving to innovate and build the world's most energy efficient heaters and air conditioners.

It is this commitment to excellence that's at the heart of everything we do. ”

Frank Seeley

AM, DUniv Flin, FAICD
Founder and Executive Chairman




The *ultimate* choice for comfort in all conditions

| | |
|---------------------|-------|
| Ducted systems | 4-11 |
| Split systems | 13-16 |
| Multi-split systems | 18-21 |
| Add-on cooling | 22-27 |

The Award Winning Company

Seeley International consistently wins awards each year for new product design, innovation and environmental friendliness.

Recent awards include:




Standard features

The DC inverter technology difference

All Braemar ducted inverter systems feature DC inverter technology.

An inverter is a power conversion circuit that electronically regulates the voltage, current and frequency in an air conditioner. This circuit controls the compressor and the outdoor and indoor fans, maximising the air conditioner's efficiency.


Compared to conventional models, inverter air conditioners provide:



Quicker and finer temperature control and comfort



Significantly lower running costs



Elimination of temperature fluctuations



Wider operating temperatures (model specific)



Greatly reduced system noise inside and outside the home

DC inverter technology vs. conventional

Up to 35% energy savings per year[^]

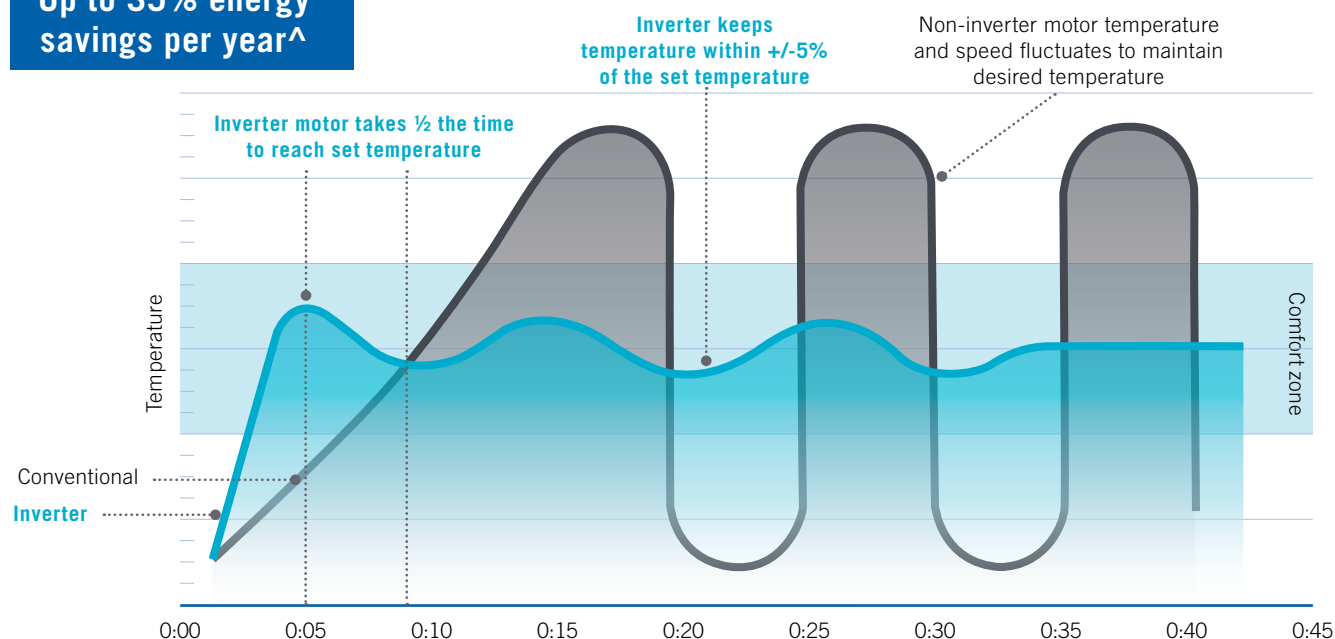


Table for illustration purposes only.

[^]Based on publicly sourced data. Compared to a conventional fixed speed air conditioner.



DRED as standard

With the introduction of smart power meters (PeakSmart in QLD), the electrical supply authority can limit the amount of power to the property at certain times during extreme weather conditions, when the power supply is at peak demand, using DRED (Demand Response Enabling Device).

In some states, the power supply authorities offer financial incentives to consumers who install DRED enabled air conditioning systems. All of Braemar's latest inverter products now come with DRED capability as standard.

Ducted reverse cycle standard wall controllers



| | | Single Phase | Three Phase |
|---|--|-----------------|---------------------------------|
| | | XE71 - standard | XK46 - standard |
|  | LCD backlit display For visibility at night. | ✓ | ✓ |
|  | 5 modes Auto, cool, dry, fan, heat. | ✓ | ✓ |
|  | 8 fan settings Auto, low, medium-low, medium, medium-high, high, super high & X-Fan. | ✓ | ✓ 7 fan settings, no super high |
|  | Sleep function Adjusts temperature up or down a few degrees during the night. Reduces energy usage while sleeping. | ✓ | ✓ |
|  | Quiet function Reduces fan speed to ensure the indoor unit runs more quietly. | ✓ | ✓ |
|  | Memory function (if a power failure occurs) Automatically restarts and resumes the settings. | ✓ | ✓ |
|  | Turbo function Ultra high fan speed to quickly cool the home. | ✓ | ✓ |
|  | Energy-saving function Change the pre-set upper and lower temperatures. Perfect for apartments to reduce energy usage. | ✓ | ✓ |
|  | X-Fan function (in cooling mode) Extends the time the fan continues to run after the cooling set point temperature is met. | ✓ | ✓ |
|  | Defrosting function Auto function to ensure optimum heating even in the iciest environments. | ✓ | ✓ |
|  | Filter clean notification Automatic reminder that filter needs cleaning. | ✓ | ✓ |
|  | Timer Set the on/off of the air conditioner to save money. | ✓ | ✓ |
|  | Child lock Children are unable to change settings. | ✓ | ✓ |
|  | Error code display Assists in fault identification and troubleshooting. Also displays when DRED is in operation. | ✓ | ✓ |
|  | Read ambient outdoor temperature Understand how well the unit is functioning. | ✓ | ✗ |
|  | Weekly timer 7 or 14 day programmable weekly timer | ✓ | Upgrade available |

Other controllers may be available, please check with the dealer.

Zone controller for ducted reverse cycle systems

Smart, sophisticated and incredibly intuitive, Braemar Zone Control makes operating your Braemar air conditioner so simple. The discreet and modern design will blend seamlessly into the decor of your home.



Main features



Touchscreen

All functions & operations are only a touch away with the easily navigated interface.



Useful settings

Access features such as child lock, quiet mode and servicing information.



Program mode

Programmable daily, weekly or 2 weekly, 8 time-period program, customisable to suit your lifestyle.



Zone your home

Switch between zones in your home and control the settings in each zone. Save on running costs by switching zones off.¹ Up to 8 zones², with or without individual zone temperature sensing and control.



Convenient control

Activate or deactivate zone heating and cooling at the RF remote sensor or at the Braemar zone control.



RF control

Radio Frequency remote sensors for ease of installation.

Wi-Fi Smart App



Control your heating and cooling comfort needs directly from your mobile device! For example, turn on the heating cycle wherever you are, ensuring you come home to a warm home on those cold winter days. The EWPE app is free and available for download on your smartphone.



Note: WiFi module sold separately.



1 x Main
Braemar Zone Control



1 x Radio Frequency
remote sensor per zone

Optional subsidiary
wired wall control



This diagram is for illustration purposes only.
Zoning is subject to individual house design.

- Control 4 to 8² zones with individual temperature control.
- Set different temperatures for each zone.
- Ability to turn zones on and off, at the RF remote sensor, or, at the wired wall control.
- Total control with up to 8 time schedules per zone per day.
- Each zone can be both temperature and time schedule controlled.
- Prevent excessive power bills by setting "SAVE" function. This function limits the upper and lower temperature settings.
- Optional additional subsidiary wired wall control can be purchased to allow two access points to your zone system.
- "I Demand" function limits the power input to 75% to assist with reducing energy bills.
- "X-Fan" function allows the indoor fan to continue after the system has been switched off in cooling mode, this helps dry the indoor heat exchanger.
- Optional WiFi control module.

1. Zoning is an optional extra. Additional costs apply.

2. Braemar zone control kit comes standard for a 4 zone system. This kit can be expanded to 8 zones with the purchase of additional RF remote sensors.

Note: Braemar zone control matches with our latest R32 single phase KDHV series and R410A SDHV series, both single phase and three phase. Some zones can be operated without the RF remote sensor however a minimum of one sensor is required for the system because wired wall control does not have an "on board" sensor.

Single phase ducted reverse cycle

Indoor unit



R32 refrigerant

More environmentally friendly, R32 refrigerant global warming potential is 68% lower than R410A, with up to 30% reduction in charging quantity needed.



Gold Fin

Protective coating on the indoor heat exchanger coil, for greater durability.



ZERL

Rated to the latest energy rating label standard.



Efficient and quiet


Inverter technology, optional motion sensor and installer settings tailoring airflow, all ensuring maximum efficiency and the quietest operation.

Available in 5 sizes.




Low profile design

Visually appealing, discreet and low profile unit to deliver conditioned air via ducting and suitable ceiling or wall grilles.



Condensate pump as standard

All single phase ducted inverters have the option of utilising the built in drain pump or the gravity drain. The condensate pump has a 1m lift, making it easier to get the condensate away from the indoor unit and to the nearest drain point. This provides flexible installation options.



Home automation system adaptable


Modbus compatibility allows operation with a wide range of home automation systems. Remote on/off control available for applications that require connection to a Building Management System (BMS), or require a room card.

Outdoor unit



Black Fin

Advanced protective coating on the outdoor coil to reduce corrosion and protect from the harsh Australian elements.




Flexible outdoor placement

Long pipe runs of up to 50m allows flexibility in placing an outdoor unit.



Slim design

Allows more flexibility in placing an outdoor unit. Easily fits into tighter spaces.



Quick and easy installation

Single drain connection point allows for quick and easy installation.



DRED as standard

Demand response enabled device capability is standard.



Pictured: KCHV070DIB

Pictured: KCHV140DIB

Three phase ducted reverse cycle

Indoor unit




Power saving

High energy efficiency results in significant savings in running costs.



Easy and flexible installation

Compact and adaptable room positioning allows for flexible installation choices. 2 core signal cable to outdoor unit allows for quick installation.



Low profile design

Visually appealing, discreet and low profile design that can be concealed above ceilings to deliver conditioned air via ducting and suitable ceiling or wall grilles.



Home automation system adaptable¹

Remote on/off control available for applications that require connection to a Building Management System (BMS), or require a room card.




Efficient and quiet

Inverter technology and installer settings tailoring airflow, all ensuring maximum efficiency and quietest operation.




Available in 2 sizes.

Outdoor unit



Flexible outdoor placement

Long pipe runs of up to 50m allow flexibility in placing an outdoor unit.



Quick and easy installation

Single drain connection point allows for quick and easy installation.



DRED as standard

Demand response enabled device capability is standard.



Gold Fin

Protective coating on the aluminium coil to reduce corrosion and protect from the harsh Australian elements.



1. Additional components may need to be purchased.

Technical specifications

Single phase ducted reverse cycle

| Model | | | Outdoor | KCHV070D1B | KCHV100D1B | KCHV125D1B | KCHV140D1B | KCHV160D1B |
|--|----------------------------|---------------------------|-----------|------------------|------------------|------------------|------------------|------------------|
| | | | Indoor | KDHV070D1S | KDHV100D1S | KDHV125D1S | KDHV140D1S | KDHV160D1S |
| Cooling Capacity | | | kW | 7.10 | 10.00 | 12.40 | 13.50 | 16.30 |
| Cooling Capacity Range (Min ~ Max) | | | kW | 2.40 ~ 8.00 | 3.20 ~ 11.00 | 3.60 ~ 12.80 | 6.80 ~ 16.00 | 6.00 ~ 17.00 |
| Heating Capacity at 7°C | | | kW | 8.00 | 12.00 | 14.00 | 16.00 | 18.60 |
| Heating Capacity Range (Min ~ Max) | | | kW | 2.20 ~ 9.00 | 3.00 ~ 13.50 | 3.60 ~ 14.50 | 4.50~17.00 | 7.00~19.00 |
| Heating Capacity at 2°C | | | kW | 5.95 | 7.10 | 10.64 | 10.65 | 12.93 |
| AEER / ACOP | | | W / W | 3.54 / 3.80 | 3.26 / 3.32 | 3.25 / 3.49 | 3.16 / 3.66 | 3.32 / 3.53 |
| ZERL Star Rating Hot / Average / Cold | | Cooling | - | 3.0 / 3.0 / 3.0 | 3.0 / 2.5 / 2.5 | 3.0 / 3.0 / 3.0 | 3.0 / 2.5 / 3.0 | 3.0 / 3.0 / 3.0 |
| | | Heating | - | 2.5 / 2.0 / 1.5 | 2.5 / 1.5 / 1.0 | 3.0 / 2.0 / 1.5 | 3.0 / 2.0 / 1.5 | 3.0 / 2.0 / 1.5 |
| Electrical Data | Power Supply | | V/Hz/Ph | 220-240 / 50 / 1 | 220-240 / 50 / 1 | 220-240 / 50 / 1 | 220-240 / 50 / 1 | 220-240 / 50 / 1 |
| Indoor Unit | Rated Airflow | | l/s | 389 | 556 | 722 | 833 | 888 |
| | Airflow (Min ~ Max) | | l/s | 250 ~ 583 | 333 ~ 833 | 444 ~ 1194 | 528 ~ 1194 | 556 ~ 1222 |
| | Min ~ Max ESP | | Pa | 0 ~ 150 | 0 ~ 175 | 0 ~ 200 | 0 ~ 200 | 0 ~ 200 |
| | Drain Pump | | Y/N | Yes | Yes | Yes | Yes | Yes |
| | Sound Power Level | | dB(A) | 62 | 63 | 68 | 69 | 66 |
| | Sound Pressure (Min ~ Max) | | dB(A) | 37 ~ 44 | 40 ~ 46 | 41 ~ 47 | 41 ~ 49 | 40 ~ 48 |
| | Dimension | Outline Dimension (WxDxH) | mm | 900 x 655 x 260 | 1000 × 700 × 300 | 1400 × 700 × 300 | 1400 x 700 x 300 | 1150 x 720 x 350 |
| | Net Weight | | kg | 31.0 | 41.0 | 57.0 | 57.0 | 58.0 |
| Outdoor Unit | Sound Power Level | | dB(A) | 66 | 71 | 69 | 72 | 74 |
| | Sound Pressure | | dB(A) | 52 | 59 | 58 | 57 | 60 |
| | Dimension | Outline Dimension (WxDxH) | mm | 892 × 340 × 698 | 940 × 460 × 820 | 940 × 460 × 820 | 900 × 340 × 1345 | 940 × 320 × 1430 |
| | Number of Fans | | QTY | 1 | 1 | 1 | 2 | 2 |
| | Weight | Net Weight | kg | 53.0 | 83.0 | 92.0 | 106.0 | 117.0 |
| Ambient Temperature Operating Range | | Cooling | °C | -15°C to 52°C | -15°C to 52°C | -15°C to 52°C | -15°C to 52°C | -15°C to 52°C |
| | | Heating | °C | -15°C to 24°C | -15°C to 24°C | -15°C to 24°C | -15°C to 24°C | -15°C to 24°C |
| Pipe | Outer Diameter | Liquid Pipe | mm (Inch) | 9.53 (3/8) | 9.53 (3/8) | 9.53 (3/8) | 9.53 (3/8) | 9.53 (3/8) |
| | | Gas Pipe | mm (Inch) | 15.88 (5/8) | 15.88 (5/8) | 15.88 (5/8) | 15.88 (5/8) | 15.88 (5/8) |
| | Max Distance | Height | m | 25 | 30 | 30 | 30 | 30 |
| | | Length | m | 50 | 65 | 75 | 75 | 75 |
| Refrigerant | | Pre-Charge Length | 20m | R32 | | | | |

FAQs

Single vs three phase - what's best?

Single phase is the standard method of distribution of electric power in most homes. For larger homes with multiple high powered appliances, three phase power is generally recommended, and will deliver a much more consistent power supply than a single phase. It is important to choose your air conditioner based on your requirements, rather than the power supply readily available.

Your Braemar dealer will be able to provide more guidance.

I have a two storey home, can I install a ducted reverse cycle system?

If your home is being newly built, we strongly encourage you to incorporate HVAC ductwork cavities into the building plans, if they have not been included already. For an existing home, the design will largely determine where, and if it is possible to get ductwork from the top to the bottom storey. The ducts are generally run through cupboards, walk-in robes and linen closets for example.

Speak with your Braemar dealer for an in-home assessment for the best solution for your home.

Three phase ducted reverse cycle

| Model | | | Outdoor | SCHV20D3S | SCHV24D3S |
|-------------------------------------|----------------------------------|---------------------------|-----------|------------------|------------------|
| | | | Indoor | SDHV20D1S | SDHV24D1S |
| Cooling Capacity | | | kW | 20.00 | 24.00 |
| Cooling Capacity Range (Min ~ Max) | | | kW | 10.00 ~ 25.00 | 11.00 ~ 27.50 |
| Heating Capacity | | | kW | 22.40 | 26.00 |
| Heating Capacity Range (Min ~ Max) | | | kW | 10.00 ~ 30.00 | 11.00 ~ 33.00 |
| AEER / ACOP | | | W / W | 3.28 / 3.71 | 3.35 / 3.69 |
| Electrical Data | Power Supply | | V/Hz/Ph | 380-415 / 50 / 3 | 380-415 / 50 / 3 |
| Indoor Unit | Rated Airflow | | l/s | 1220 | 1390 |
| | Airflow (Min ~ Max) | | l/s | 977 ~ 1222 | 1111 ~ 1389 |
| | Min ~ Max ESP | | Pa | 0 ~ 250 | 0 ~ 250 |
| | Drain Pump | | Y/N | No | No |
| | Sound Pressure Level (Min ~ Max) | | dB(A) | 51 ~ 53 | 53 ~ 55 |
| | Dimension | Outline Dimension (WxDxH) | mm | 1690 x 870 x 440 | 1690 x 870 x 440 |
| | Net Weight | | kg | 110.0 | 113.0 |
| Outdoor Unit | Sound Pressure | | dB(A) | 60 | 62 |
| | Dimension | Outline Dimension (WxDxH) | mm | 940 x 460 x 1615 | 940 x 460 x 1615 |
| | Number of Fans | | QTY | 2 | 2 |
| | Weight | Net Weight | kg | 155.0 | 175.0 |
| Ambient Temperature Operating Range | | Cooling | °C | -7 ~ 48 | -7 ~ 48 |
| | | Heating | °C | -15 ~ 24 | -15 ~ 24 |
| Pipe | Outer Diameter | Liquid Pipe | mm (Inch) | 9.53 (3/8) | 9.53 (3/8) |
| | | Gas Pipe | mm (Inch) | 19.05 (3/4) | 22.23 (7/8) |
| | Max Distance | Height | m | 30 | 30 |
| | | Length | m | 50 | 70 |
| Refrigerant | | Pre-Charge Length | 7.5m | R410A | |



ZERL Zoned Energy Rating Label

What you need to know

Energy rating labelling on air conditioners has taken a big leap forward, with the Zoned Energy Rating Label (ZERL), mandatory on new models from April 1, 2020. The ZERL label allows consumers to make a more informed decision for their heating and cooling. The labels outline how much heating and cooling power a model has, noise production, and energy efficiency and usage based on location. ZERL labels can be found on Braemar single phase ducted reverse cycle systems and Airvolution™ split systems.

Cooling capacity




This tells you how much cooling the air conditioner can provide. This example tells you that if the temperature outside is hot (35°C), then the appliance can provide 2.50 kilowatts (kW) of cooling. System size is critical, and will depend on size of space to be cooled, insulation, windows and shade. A correctly sized system will make your cooling more efficient and affordable.

Heating capacity



This tells you how much heating the air conditioner can provide. This example tells you that if the temperature outside is cold (7°C), then the appliance can provide 3.0 kilowatts (kW) of heating, and if the temperature outside is very cold (2°C), then the appliance can provide 3.0 kW of heating.

Model name and number

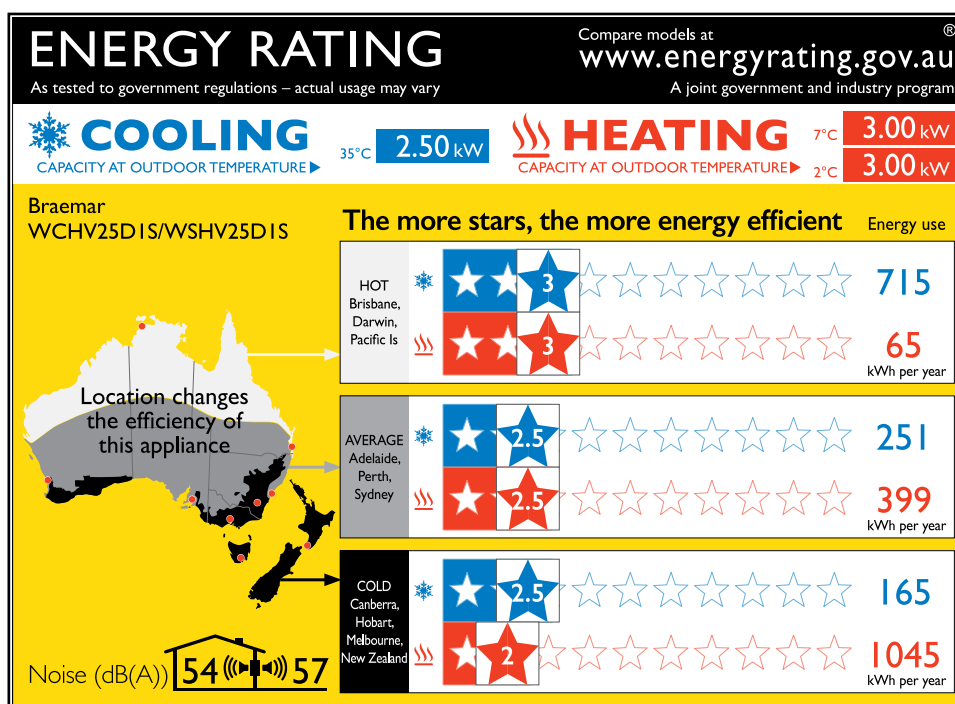

Noise levels - sound power

This tells you how loud the air conditioner will be when it is running. The number inside the house is how loud it will be inside the home, and the number outside the house is how loud it will be near the outside unit.

The sound pressure will vary depending upon the installation site. Hard surfaces can reflect noise and influence the sound levels heard both inside and outside the home.

Efficiency ratings based on location

The efficiency of a product will change, dependent on the location in which it operates. The new ZERL helps consumers to determine which model would work best in their location.

There are three bands of ratings, for Hot, Average and Cold areas in Australia and New Zealand. Use the map to see which area you live in, and which band you should use.

Electricity usage

This tells you how much electricity the air conditioner will use each year for cooling and heating.

The lower the kWh used, the lower the cost to run the appliance. If you know your electricity tariff, you can multiply it by these figures to estimate yearly running costs.


Information source

All information on this page has been sourced from www.energyrating.gov.au. The ZERL pictured is for Braemar model WCHV25D1S/WSHV25D1S.

Split system air conditioning


The ideal solution to cool or heat just one area or room of the home or office

Braemar split systems come in four capacities, to efficiently cool or heat any room - from the study to large open plan living spaces. Inverter technology which is standard across the range, helps to reduce energy consumption - so that you can save money and relax in comfort all year round.

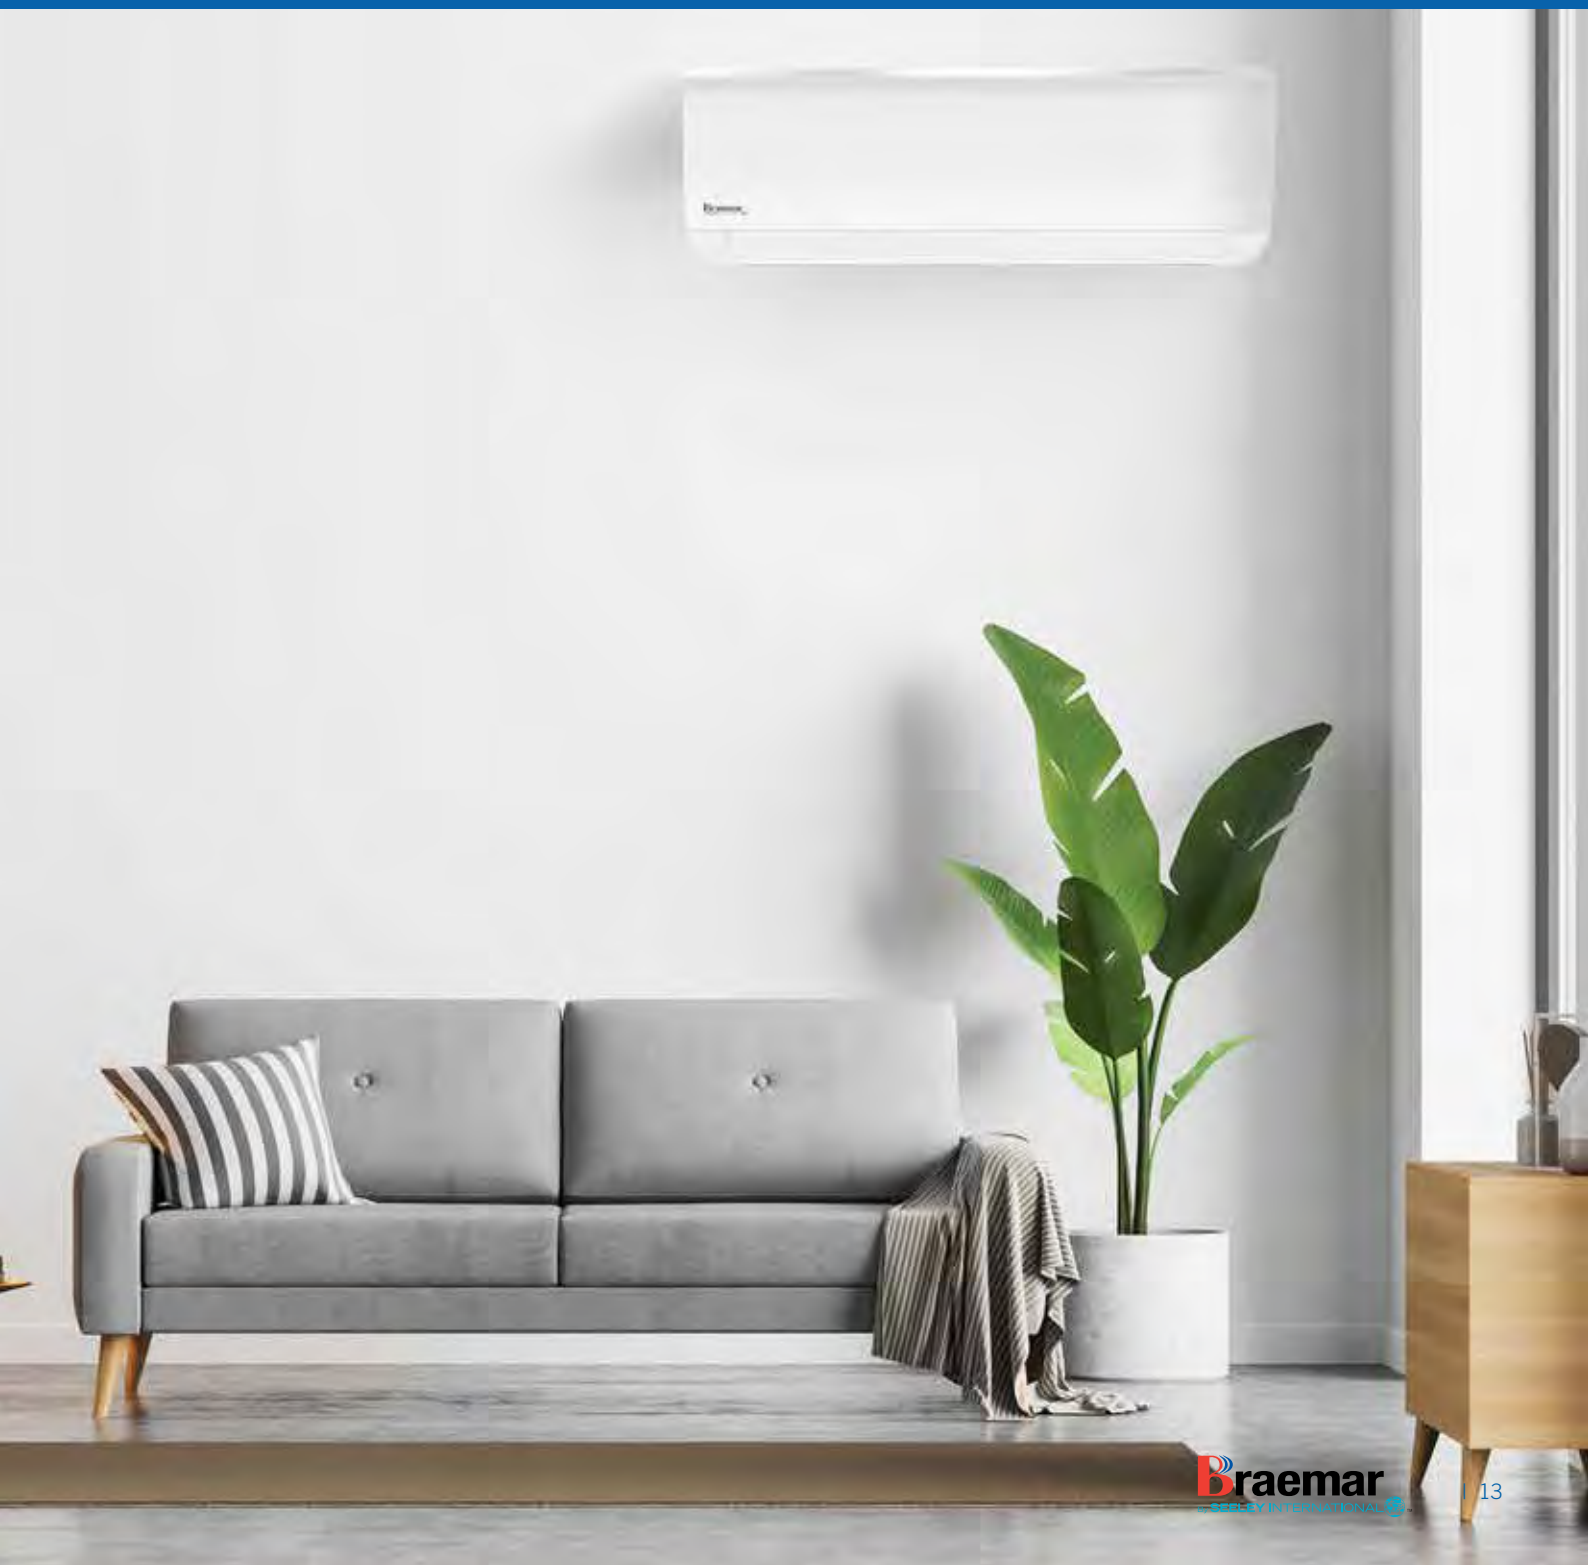

Airvolution™ inverter split system

Indoor unit

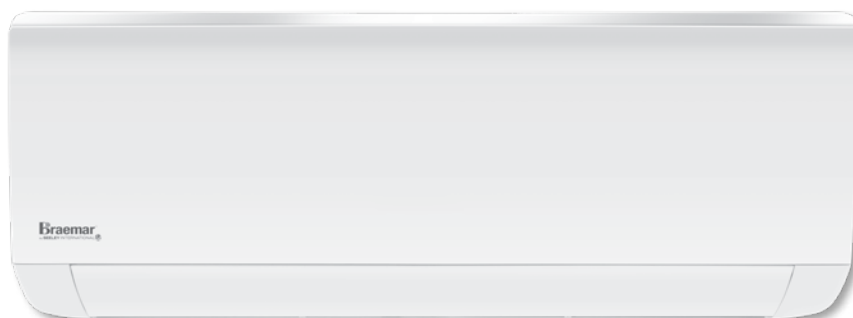

R32 refrigerant
Global Warming
Potential 65% lower and
more energy efficient
than R410A



ZERL
rated to the latest
standard, with
zoned energy
rating labels



Range
4 capacities, from
small to large
spaces



I Feel Mode
room temperature
controlled exactly where
it is required

- Standard white finish for contemporary look.
- Available in 4 sizes for domestic and commercial use. Unit can be installed in small homes and large spaces.
- Dry connection available for gate-card or remote on/off, great for schools or hotels.
- Anti-corrosion coating on printed circuit boards to protect electronics.



Wi-Fi control
available through the
EWPE Smart app



Additional features



Auto adjusted
sleep curves



Draught
protection




ZERL - latest energy
rating label



Timer



Intelligent
defrosting



Protective filters



Turbo button



Self-diagnostic



Wide operating
temperatures



Wired wall controller
(optional)
BACnet compatible



Energy saving*



Wi-Fi control
functionality
included




Dehumidification



Auto restart

Outdoor unit



Flexible outdoor placement
long pipe runs
(up to 25m)



Gold Fin
advanced protection to
reduce corrosion and
protect from the harsh
Australian elements



Slim design
allows more flexibility
in placing outdoor
units



DRED
demand response
enabled device
capability is standard



R32 refrigerant
high efficiency



Technical specifications

Airvolution™ range

| Model No. | | Outdoor | WCHV25D1S | WCHV35D1S | WCHV50D1S | WCHV70D1S |
|--|---------------------------------|-------------|-----------------|-----------------|-----------------|------------------|
| | | Indoor | WSHV25D1S | WSHV35D1S | WSHV50D1S | WSHV70D1S |
| Capacity | Cooling | kW | 2.50 | 3.35 | 5.10 | 7.00 |
| | Heating | kW | 3.00 | 3.60 | 5.40 | 6.80 |
| ZERL Star Rating (Hot/Average/Cold) | Cooling | - | 3.0 / 2.5 / 2.5 | 3.5 / 3.0 / 3.0 | 3.0 / 2.5 / 3.0 | 4.0 / 3.5 / 3.5 |
| | Heating | - | 3.0 / 2.5 / 2.0 | 3.0 / 2.5 / 2.0 | 2.5 / 2.0 / 1.5 | 3.0 / 2.5 / 2.0 |
| AEER | | W/W | 3.73 | 3.75 | 3.61 | 3.48 |
| ACOP | | W/W | 3.92 | 3.69 | 3.50 | 3.84 |
| Refrigerant R32 | Chargeless Length | m | 10.0 | 10.0 | 10.0 | 10.0 |
| | Refrigerant Additional Charge | g/m | 16 | 16 | 16 | 40 |
| Air Flow | | l/s (m³/h) | 175 (630) | 189 (680) | 236 (850) | 361 (1300) |
| Indoor Unit | Sound Pressure Level dB | dB | 26 ~ 40 | 26 ~ 43 | 34 ~ 49 | 32 ~ 49 |
| | Sound Power Level dB | dB | 54 | 58 | 63 | 63 |
| | Outline dimension (WxDxH) | mm | 849 × 215 × 289 | 849 × 215 × 289 | 970 × 225 × 300 | 1122 × 247 × 329 |
| Outdoor Unit | Sound Power Level | dB (A) | 57 | 62 | 62 | 64 |
| | Outline Dimension (WxDxH) | mm | 782 × 320 × 540 | 848 × 320 × 596 | 912 × 373 × 646 | 912 × 373 × 646 |
| | Net Weight | kg | 29 | 33 | 42 | 43.5 |
| Pipe | Outer Diameter | Liquid Pipe | mm (Inch) | 6.35 (1/4) | 6.35 (1/4) | 6.35 (1/4) |
| | | Gas Pipe | mm (Inch) | 9.52 (3/8) | 9.52 (3/8) | 12.70 (1/2) |
| | Max Distance | Height | m | 10 | 10 | 10 |
| | | Length | m | 15 | 20 | 25 |
| Electrical | Minimum Circuit Breaker Outdoor | amp | 10 | 10 | 16 | 16 |
| Ambient Temperature Range | Cooling | °C | -10 ~ 50 | | | |
| | Heating | °C | -15 ~ 24 | | | |

ZERL Zoned Energy Rating Label

The Airvolution™ utilises the Zoned Energy Rating Label. Refer to page 12 for more information, or visit: <https://www.seeleyinternational.com/seeley-learning-centre/zerl/>

FAQs

Will a split system suit my needs?

Split systems are a cost effective way to heat and cool one room in your home. The Braemar range comes in a number of capacities, to suit small studies, right up to large open plan living spaces. Installation costs are generally much lower than for ducted systems, making split systems an attractive choice for budget-conscious home owners who still want efficient, quick heating and cooling in single rooms and large spaces. Braemar has single split systems (one indoor unit to one outdoor unit) and multi split systems (where you can have a number of indoor units connected to the one outdoor unit)

How do I maximise the operation of my split system?

1. Dirt, leaves and debris can collect over time around your outdoor unit, or be sucked into the air inlet. Restriction to airflow will reduce the unit's performance and efficiency, so be sure to check periodically and clear away any loose litter and dirt from the unit and air inlet.
2. Clean your air filter on the indoor unit before summer and winter starts. Your owners manual will have step by step instructions on how to do this. The cleaner the return air filter, the more energy efficient your air conditioning system will be.
3. Allowing your system to gradually heat, or cool, will be more energy efficient than cranking your thermostat settings. Whilst it may be tempting to set the control to minimum for cooling, or, maximum for heating, a 1°C increase on the thermostat can equate to up to 10% more energy used.¹ For example, heating set to 22°C will have to work much harder than if it were set to 19°C, when heating.
4. Use the settings features like timer and "I feel" mode to further maximise energy efficiency and comfort levels. Ideally, your unit should already be running before the hottest or coldest part of the day. Some of our controls also have "SAVE" function, where the lower limit for cooling and the upper limit for heating can be set, a great way to prevent excessive power bills.



Multi-split system air conditioning

Cool or heat multiple rooms individually from just one outdoor unit.

Multi-split system air conditioning enables the connection of up to five indoor units to a single outdoor unit.


Save running costs by heating or cooling rooms as required with different temperature settings in each room.



Multi-split range


Multi-split system air conditioning

Cool or heat multiple rooms individually from just one outdoor unit.

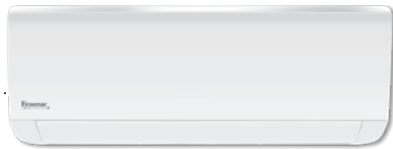


Wall mounted split systems

The Airvolution™ multi-split range is available in 4 sizes.
Refer to page 14 for more information on the indoor units.



Outdoor unit

A central slimline unit with long pipe run and easy installation.



Multi-split range

Indoor unit

Split systems offer a wall mounted, modern design option.

The **Airvolution™** is available in 4 sizes for multi-split system configurations.



I Feel Mode
room temperature controlled to exactly where it is required



WIFI Control
from a smart device




Quiet
low indoor noise, even at full capacity



Efficient
cools and heats quickly

Outdoor unit



Flexible outdoor placement
long pipe runs (up to 75m total)




DRED
demand response enabled device capability is standard



Wide operating range
comfort in extreme conditions (model specific)



Slim design
allows more flexibility in placing outdoor units



Faster installation
single drain connection point

Technical specifications

Multi-split Airvolution™ indoor units

| Model | | | Indoor | WSHV25D1S | WSHV35D1S | WSHV50D1S | WSHV70D1S |
|------------------|-----------------------------------|---------------------------|-----------|-----------------|-----------------|-----------------|------------------|
| Cooling Capacity | | | kW | 2.50 | 3.35 | 5.10 | 7.00 |
| Heating Capacity | | | kW | 3.00 | 3.60 | 5.40 | 6.80 |
| Indoor Unit | Air Flow (max) | | L/s | 175 (630) | 189 (680) | 236 (850) | 361 (1300) |
| | Sound Pressure Level dB (A) (Max) | | dB (A) | 26-40 | 26-43 | 34-49 | 32-49 |
| | Sound Power Level dB (A) (Max) | | dB (A) | 54 | 58 | 63 | 63 |
| | Dimension | Outline dimension (WxDxH) | mm | 849 x 215 x 289 | 849 x 215 x 289 | 970 x 225 x 300 | 1122 x 247 x 329 |
| | Net Weight | | kg | 10.5 | 10.5 | 13.5 | 16.0 |
| Pipe | Outer Diameter | Liquid Pipe | mm (Inch) | 6.35 (1/4) | 6.35 (1/4) | 6.35 (1/4) | 6.35 (1/4) |
| | | Gas Pipe | mm (Inch) | 9.52 (3/8) | 9.52 (3/8) | 12.70 (1/2) | 15.88 (5/8) |
| | Max Distance | Height | m | 10 | 10 | 10 | 10 |
| | | Length | m | 15 | 20 | 25 | 25 |


Multi-split outdoor units

| Model | | | Outdoor | MCHV54D12 | MCHV73D13 | MCHV81D14 | MCHV10D14 | MCHV11D15 |
|-------------------------------------|-----------------------|---------------------------|-----------|------------------|------------------|------------------|-------------------|------------------|
| Cooling Capacity | | | kW | 5.40 | 7.30 | 8.15 | 10.25 | 11.40 |
| Cooling Capacity Range (Min ~ Max) | | | kW | 2.85 ~ 6.50 | 4.50 ~ 10.00 | 5.00 ~ 10.00 | 2.60 ~ 10.50 | 2.60 ~ 12.00 |
| Heating Capacity | | | kW | 5.50 | 8.80 | 9.30 | 11.20 | 12.00 |
| Heating Capacity Range (Min ~ Max) | | | kW | 2.40 ~ 6.65 | 4.00 ~ 11.00 | 3.00 ~ 11.00 | 2.60 ~ 12.00 | 2.60 ~ 13.00 |
| Max Indoor Capacity | | | | 8.10 | 10.95 | 12.22 | 15.00 | 17.10 |
| AEER / ACOP | | | W / W | 3.66 / 3.83 | 3.33 / 3.62 | 3.42 / 3.55 | 3.49 / 3.88 | 3.19 / 3.78 |
| Electrical Data | Power Supply | | V/Hz/Ph | 220-240 / 50 / 1 | 220-240 / 50 / 1 | 220-240 / 50 / 1 | 220-240 / 50 / 1 | 220-240 / 50 / 1 |
| Outdoor Unit | Maximum Drive IDU No. | | | 2 | 3 | 4 | 4 | 5 |
| | Sound Pressure Level | | dB(A) | 56 | 58 | 58 | 61 | 61 |
| | Dimension | Outline Dimension (WxDxH) | mm | 955 x 396 x 700 | 1001 x 427 x 790 | | 1098 x 440 x 1103 | |
| | Number of Fans | | QTY | 1 | 1 | 1 | 1 | 1 |
| | Weight | Net Weight | kg | 47.0 | 59.0 | 65.0 | 89.0 | 90.0 |
| Ambient Temperature Operating Range | | Cooling | °C | -15 ~ 43 | -15 ~ 43 | -15 ~ 43 | -7 ~ 48 | -7 ~ 48 |
| | | Heating | °C | -15 ~ 24 | -15 ~ 24 | -15 ~ 24 | -15 ~ 30 | -15 ~ 30 |
| Pipe | Outer Diameter | Liquid Pipe | mm (Inch) | 2 x 6.35 (1/4) | 3 x 6.35 (1/4) | 4 x 6.35 (1/4) | 4 x 6.35 (1/4) | 5 x 6.35 (1/4) |
| | | Gas Pipe | mm (Inch) | 2 x 9.53 (3/8) | 3 x 9.53 (3/8) | 4 x 9.53 (3/8) | 4 x 9.53 (3/8) | 5 x 9.53 (3/8) |
| | Max Distance | Height | m | 5.0 | 5.0 | 5.0 | 7.5 | 7.5 |
| | | Length | m | 10.0 | 20.0 | 20.0 | 25.0 | 25.0 |
| | | Sum of all Indoor Units | m | 20.0 | 60.0 | 70.0 | 75.0 | 75.0 |
| Refrigerant | | Pre-Charge Length | R410A | 10 | 30 | 40 | 40 | 40 |



Add-on cooling


The ideal solution for whole of home comfort, complementing a new or existing Braemar ducted gas heating system¹

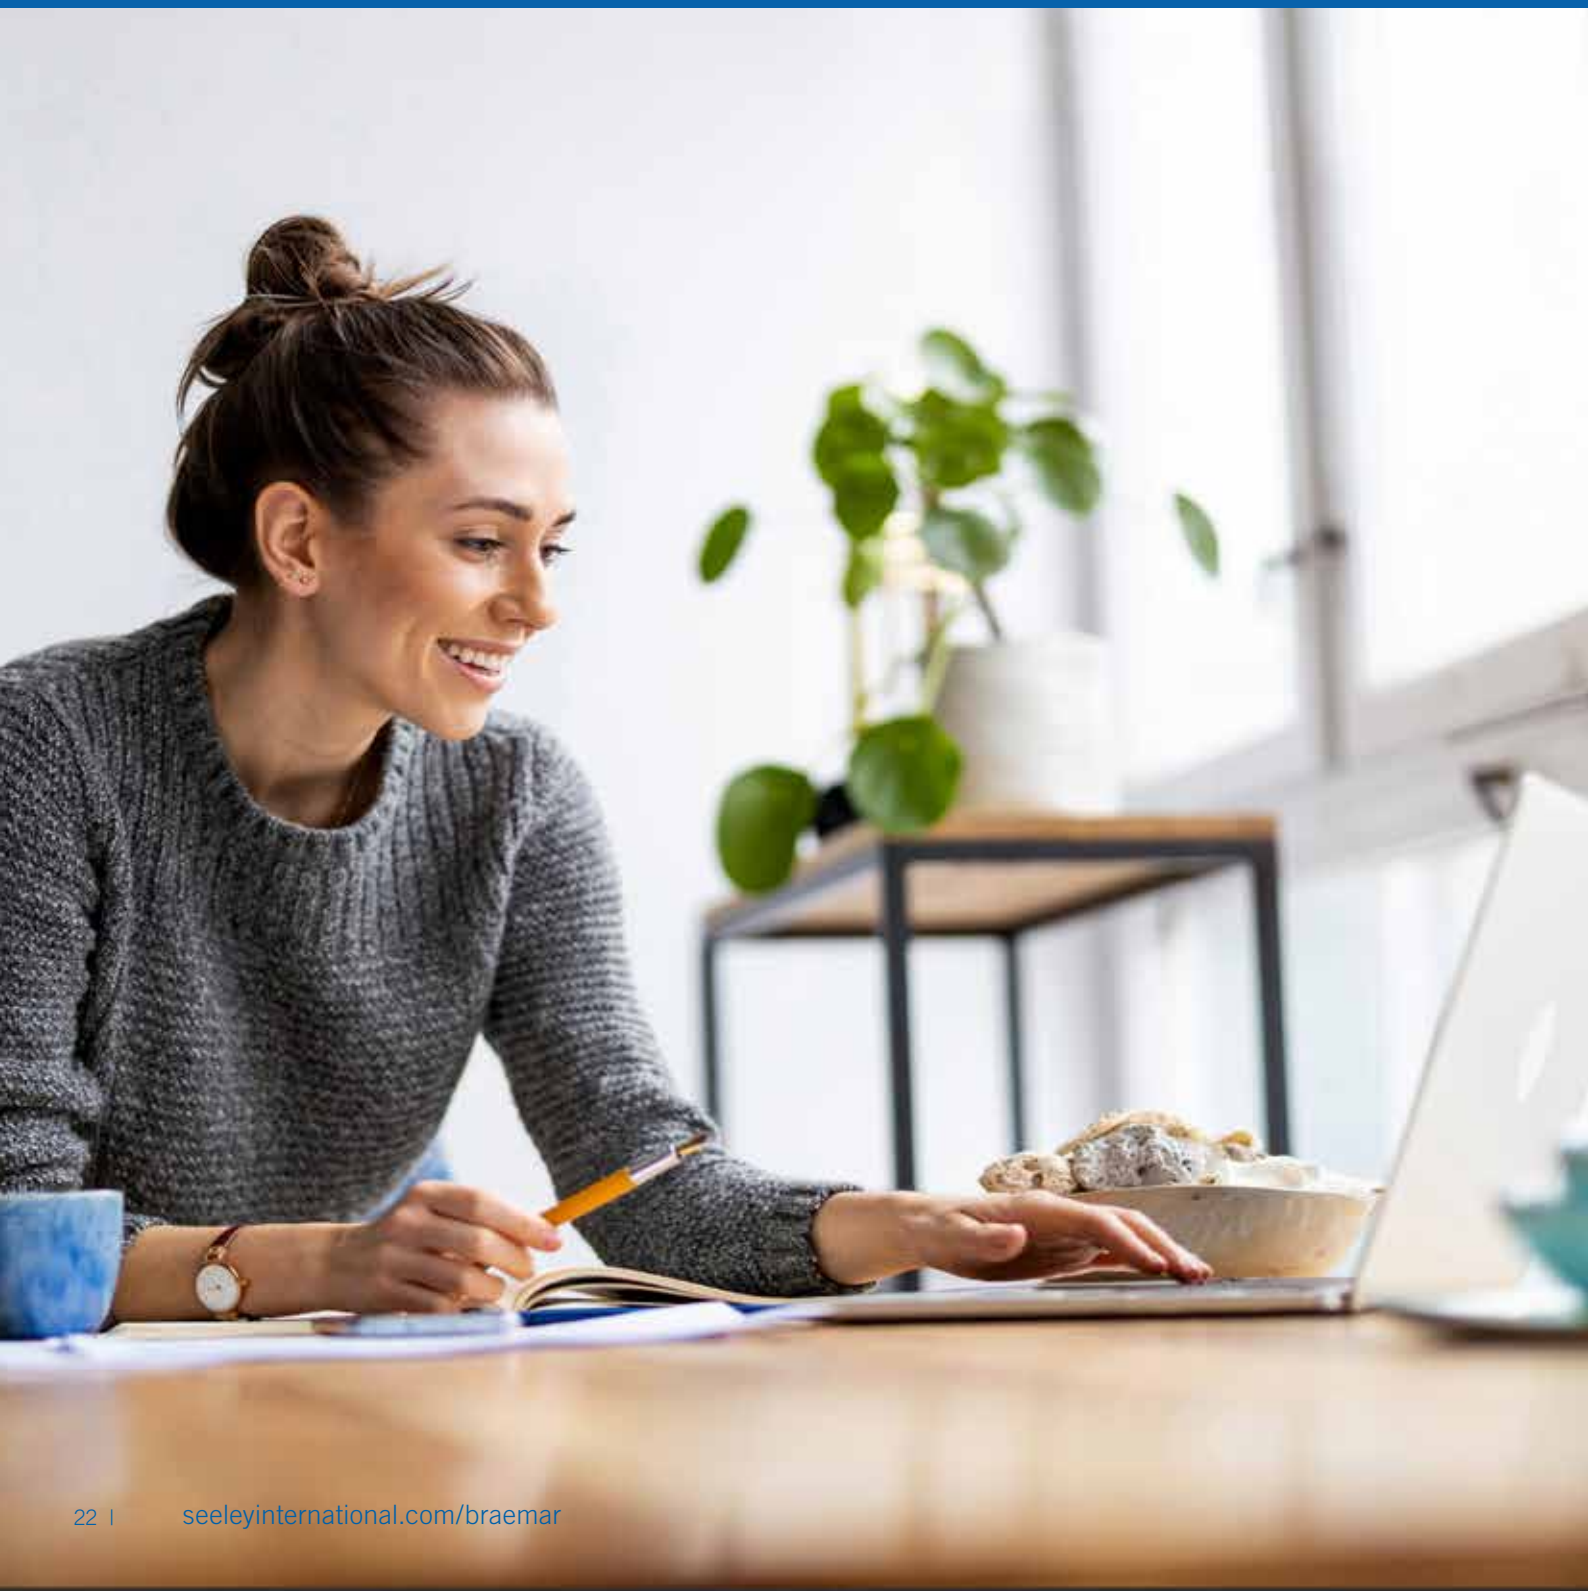

Add-on cooling for ducted gas heating

Add-on cooling systems are specifically designed to complement a new or existing² Braemar ducted gas heating system. Compact and economical to run, it can be installed at the same time as a heating system, or added later.

Add-on cooling systems utilise existing Braemar ducted gas heating ductwork and grilles to provide refrigerated cooling.

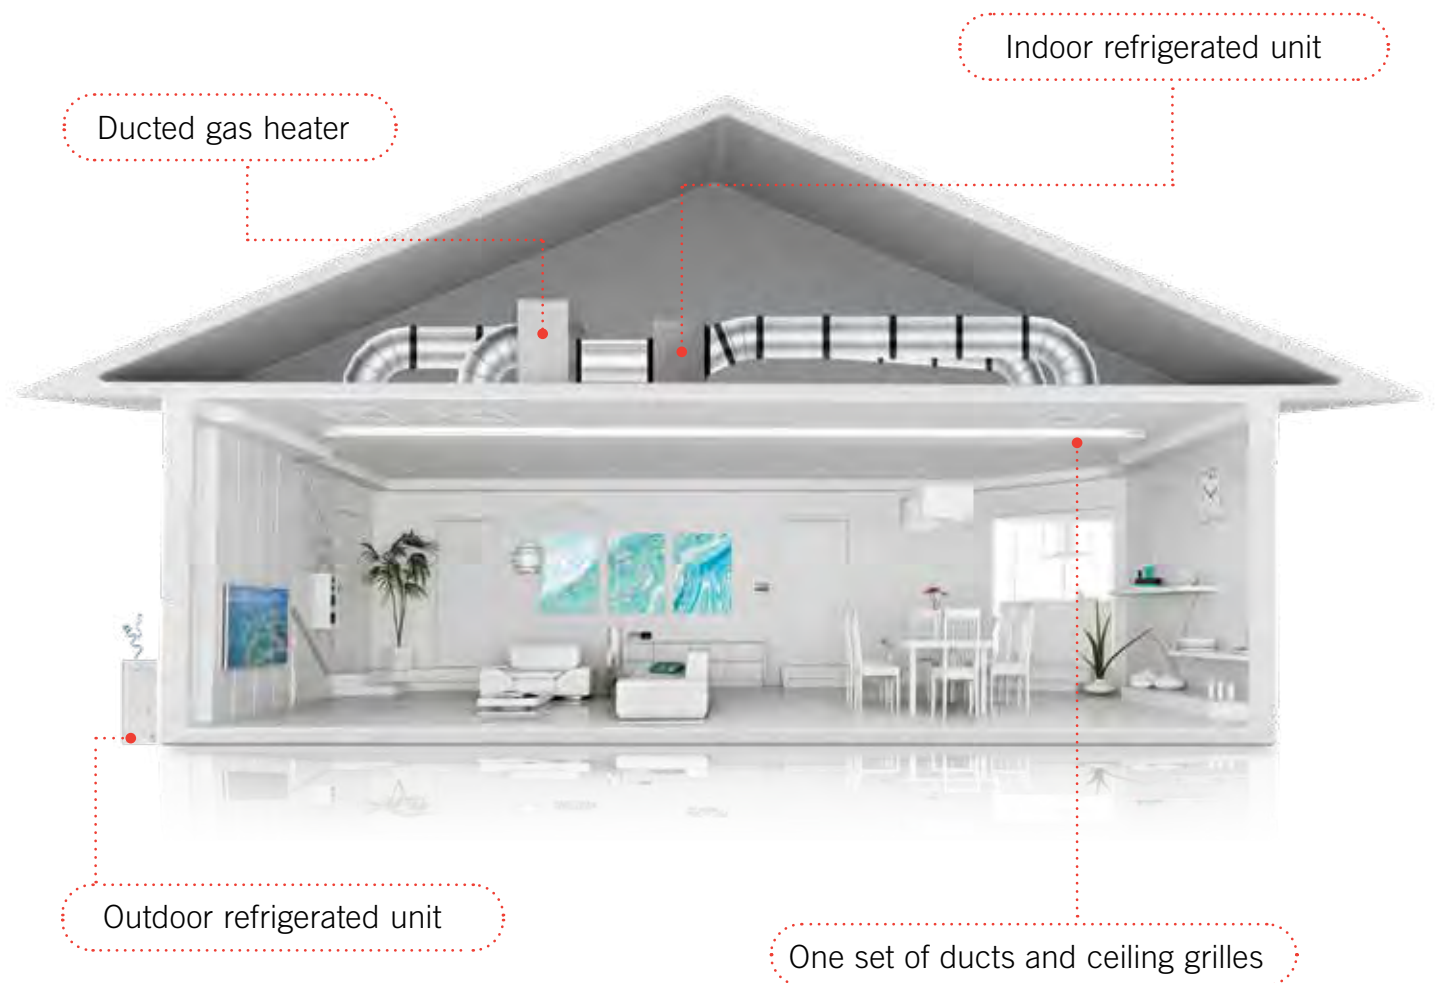

1. Only Braemar extra air model heaters are designed to be paired with Braemar add-on cooling systems. For the Add-on cooling range, the Invertair indoor units are manufactured in Australia (from local and imported components).

2. Applicable to installations where airflow requirements and duct design are suitable. Not all models of Braemar ducted gas heaters are suitable for add-on cooling, so please check with the dealer.

Invertair™

Australia's first and only true inverter add-on cooling system.

Indoor unit

The Inverter technology ensures uninterrupted comfort and a significant saving in running costs.



Power saving

High energy efficiency results in significant savings in running costs.



Low profile design

Visually appealing with a discreet and low profile design that can be concealed above ceilings or below the floor to deliver conditioned air via ducting and suitable ceiling or floor grilles.



Efficient and quiet

Inverter technology, 1W standby mode and automatic fan adjustment as the evening temperature drops, all ensure maximum efficiency and quietest operation.




Easy and flexible installation

Compact and suitable for installation in almost all roof cavities. Room positioning and grille options allow for flexible installation choices.

Note: The Invertair™ series can only be installed with the TQ heater and MaglQtouch® controller. Available in 4 sizes.

Outdoor unit




Flexible outdoor placement

Long pipe runs of up to 50m allows flexibility in placing an outdoor unit.



Slim design

Allows more flexibility in placing an outdoor unit. Easily fits into tighter spaces.



Quick and easy installation


Single drain connection point allows for quick and easy installation.



Coolmaster™

Fixed speed add-on cooling system

Indoor unit



Easy single point connection

Quick and easy single point duct connection of indoor unit.




Built-in safe tray

Provides peace of mind, knowing that your Braemar add-on cooling unit has a built in safety drain tray.



Easy and flexible installation

Compact design allows for installation in ceiling or under floor.




18kW to 23kW capacity units

The range is suitable for all types of applications - from medium to larger homes, open living spaces and office buildings.



Outdoor unit




Flexible outdoor placement

Long pipe runs of up to 50m allows flexibility in placing an outdoor unit.



Efficient and quiet with 3 speed fan

Automatic fan speed adjustment as the evening temperature drops makes for best efficiency and quietest operation.



Long life unit protection

Cabinet is made of high quality galvanised steel and powder-coated with high quality epoxy paint for long life and extra strength. Pre-coated aluminium fins provide resistance against corrosion.



Vertical discharge

Top airflow outdoor unit allows for flexible installation.



Technical specifications

Invertair™ series

| Model | | | Outdoor | SCHV10D1S | SCHV12D1S | SCHV14D1S | SCHV16D1S |
|--|-------------------------------|---------------------------|-------------|-------------------|-------------------|-------------------|-------------------|
| | | | Indoor | SACV10D1S | SACV12D1S | SACV14D1S | SACV16D1S |
| Cooling Capacity | | | kW | 10.00 | 13.00 | 14.50 | 15.50 |
| Cooling Capacity Range | | | kW | 3.20 ~ 11.00 | 4.00 ~ 13.50 | 6.00 ~ 14.50 | 6.40 ~ 18.00 |
| AEER | | | W/W | 3.44 | 3.71 | 3.71 | 3.36 |
| Electrical Data | Power Supply | | V / Hz / Ph | 220-240 / 50 / 1 | 220-240 / 50 / 1 | 220-240 / 50 / 1 | 220-240 / 50 / 1 |
| | Power Input (Nominal) | Cooling | kW | 2.90 | 3.50 | 3.90 | 4.60 |
| | Max Current Outdoor | | A | 19 | 21 | 28 | 31 |
| | Circuit Breaker | | A | 25 | 25 | 40 | 40 |
| Indoor Unit | Rated Airflow | | l/s | 550 | 610 | 700 | 1050 |
| | Min~Max Airflow | | l/s | 330 ~ 650 | 415 ~ 800 | 470 ~ 800 | 610 ~ 1070 |
| | Dimension | Outline Dimension (WxDxH) | mm | 1280 x 450 x 366 | 1280 x 450 x 366 | 1280 x 450 x 366 | 1442 x 435 x 412 |
| | Weight | Net Weight | kg | 25 | 25 | 25 | 28 |
| Outdoor Unit | Sound Pressure | | dB(A) | 60 | 60 | 61 | 62 |
| | Dimension | Outline Dimension (WxDxH) | mm | 1107 x 440 x 1100 | 1107 x 440 x 1100 | 1085 x 427 x 1365 | 1085 x 427 x 1365 |
| | Weight | Net Weight | kg | 91 | 101 | 117 | 121 |
| Applicable Braemar DGH (MagIQTouch Range, X extra air) | | | Model | X20, X23 | X20, X23 | X23, X25 | X30, X32 |
| Set Temp. Range | | | °C | 18 ~ 30 | 18 ~ 30 | 18 ~ 30 | 18 ~ 30 |
| Operation Temp | | | °C | -15 ~ 48 | -15 ~ 48 | -15 ~ 48 | -15 ~ 48 |
| Pipe | Outer Diameter | Liquid Pipe | mm (Inch) | 9.53 (3/8) | 9.53 (3/8) | 9.53 (3/8) | 9.53 (3/8) |
| | | Gas Pipe | mm (Inch) | 15.88 (5/8) | 15.88 (5/8) | 15.88 (5/8) | 19.05 (3/4) |
| | Max Distance | Height | m | 15 | 30 | 30 | 30 |
| | | Length | m | 50 | 50 | 50 | 50 |
| Refrigerant | Pre-Charge Length | | m | 7.0 | 7.0 | 9.5 | 9.5 |
| | Refrigerant Additional Charge | | g/m | 60 | 60 | 60 | 60 |

Note: The above designs and specifications are subject to change without notice for product improvement.

Add-on cooling Invertair™ series are only suitable to be paired with 4, 5 and 6 star Braemar extra air heaters. For the add-on cooling range, only the Invertair indoor units are manufactured in Australia (from local and imported components).

FAQs

Why would I chose add-on cooling and ducted gas heating over ducted reverse cycle systems?

Many prefer the cosy warmth of ducted gas heating, over reverse cycle. Reasons for this include running cost savings, faster heating and less drying of the air compared to reverse cycle systems. For these reasons, pairing a ducted gas heating system and add-on cooling system is a popular alternative to a ducted reverse cycle system. There is also the consideration of cost, with the ability to install ducted gas heating first, and add-on cooling at a later date,¹ thus spreading out expenses.

What if I already have ducted gas heating installed?

If you already have ducted gas heating installed, it is important to ensure that your existing system can facilitate add-on cooling. Ductwork, outlets and zoning need to be designed in order to support an add-on cooling system. Note, the Braemar Invertair™ add-on cooling systems can only be paired with Braemar Q series extra-air ducted gas heaters. The Braemar Coolmaster™ series is able to be paired with most other brands, pending suitability of the system.

Your Braemar dealer will be able to accurately assess your existing system, to determine whether add-on cooling is the right option for you.

Coolmaster™ fixed speed series

| Model | | | Outdoor | TCCF18C1S | TCCF18C3S | TCCF21C1S | TCCF23C1S |
|--------------------------------------|-------------------------------|---------------------------|-------------|-------------------|-------------------|-------------------|-------------------|
| | | | Indoor | AOCF18C-S | AOCF18C-S | AOCF21C-S | AOCF23C-S |
| Cooling Capacity | | | kW | 17.80 | 17.80 | 21.10 | 23.30 |
| AEER | | | W/W | 3.52 | 3.55 | 3.58 | 3.46 |
| Electrical Data | Power Supply | | V / Hz / Ph | 220-240 / 50 / 1 | 380-415 / 50 / 3 | | |
| | Power Input (Nominal) | Cooling | kW | 5.05 | 4.99 | 5.89 | 6.73 |
| | D-Curve Circuit Breaker | | A | 40 | 16 | 20 | 20 |
| Indoor Unit | Rated Airflow | | L/hr | 935 | 935 | 1050 | 1200 |
| | Airflow (Min ~ Max) | | L/hr | 700 ~ 1000 | 700 ~ 1000 | 760 ~ 1200 | 760 ~ 1200 |
| | Dimension | Outline Dimension (WxDxH) | mm | 850 x 815 x 560 | 850 x 815 x 560 | 850 x 945 x 590 | 850 x 945 x 590 |
| | Weight | Net Weight | kg | 47 | 47 | 55 | 55 |
| Outdoor Unit | Sound Pressure (Min ~ Max) | | dB(A) | 55 ~ 61 | 55 ~ 61 | 51 ~ 67 | 51 ~ 67 |
| | Dimension | Outline Dimension (WxDxH) | mm | 1200 x 590 x 1320 | 1200 x 590 x 1320 | 1400 x 685 x 1280 | 1400 x 685 x 1280 |
| | Weight | Net Weight | kg | 153 | 153 | 159 | 162 |
| Applicable Braemar DGH (X extra air) | | | Model | X30, X32 | X30, X32 | X30, X32 | TQA5X30 |
| Recommended Set Temp. Range | | | °C | 20 ~ 28 | 20 ~ 28 | 20 ~ 28 | 20 ~ 28 |
| Ambient Temperature Range | | | °C | 20 ~ 43 | 20 ~ 43 | 20 ~ 43 | 20 ~ 43 |
| Pipe | Outer Diameter | Liquid Pipe | mm (Inch) | 12.70 (1/2) | 12.70 (1/2) | 12.70 (1/2) | 12.70 (1/2) |
| | | Gas Pipe | mm (Inch) | 19.05 (3/4) | 19.05 (3/4) | 22.20 (7/8) | 22.20 (7/8) |
| | Max Distance | Height | m | 30 | 30 | 50 | 50 |
| | | Length | m | 15 | 15 | 15 | 15 |
| Refrigerant | Pre-Charge Length | | m | 12 | 12 | 12 | 12 |
| | Refrigerant Additional Charge | | g/m | 100 | 100 | 100 | 100 |

Note: The above designs and specifications are subject to change without notice for product improvement.





BREEZAIR

Ducted Evaporative Air Conditioning

BRAEMAR

Ducted Evaporative Air Conditioning | Ducted Gas Heating | Add-On Cooling
Reverse Cycle Air Conditioning | Gas Wall Furnaces and Space Heaters

THE CLIMATE WIZARD

Micro-Core® Technology

SUPERCool

Ducted Evaporative Air Conditioning

COOLAIR

Ducted Evaporative Air Conditioning

COOLERADO

Indirect Evaporative Air Conditioning

AIRA

Direct and Indirect Evaporative Air Conditioning | Ducted Gas Heating
Commercial Gas Space Heating | Energy Recovery Systems

seeleyinternational.com/braemar

1300 360 815

2022



With the generous support of our
Australasian dealers we are proud to
be the National Variety Bash partner
supporting kids in need across Australia.

Seeley International Pty Ltd
ABN 23 054 687 035

112 O'Sullivan Beach Road, Lonsdale, SA 5160

Phone: (08) 8328 3850 Fax: (08) 8328 3950

Email: enquiries@seeleyinternational.com
seeleyinternational.com

Information in this brochure was correct at the time of preparation. E & OE

Cat No M457 REV C (0522)