

Midwest & Pro Panel




- Residential, Agricultural, & Commercial Applications
- Anti-siphon side lap design
- 40 Year Paint Warranty
- 2 ½:12 Minimum Roof Pitch
- Sherwin Williams Weather XL


26
Gauge

29
Gauge

Midwest Panel is used for agricultural, residential, and commercial projects. The extra striation on top of the rib gives the panel higher durability and safeguard against extreme weather. It has a 36" coverage and a $\frac{3}{4}$ " rib height.

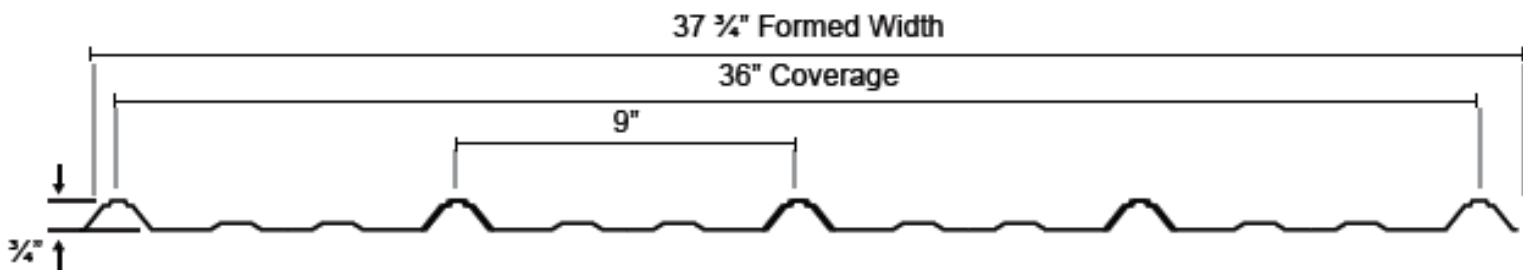

Pro Panel is used for agricultural, residential, and commercial projects. It has a 36" coverage and a $\frac{9}{16}$ " Rib.

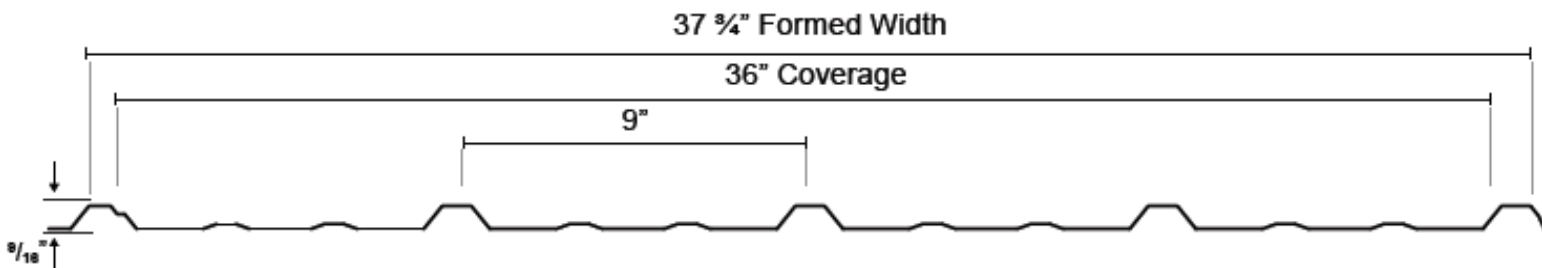

A Higher Level of Service & Quality

Midwest & Pro Panel

Color Availability

	Alamo White	White Crinkle	Arctic White	Ash Gray	Ash Gray Crinkle	Black	Black Crinkle	Brick Red	Brite Red	Brown	Brown Crinkle	Burgundy	Burgundy Crinkle	Berry	Burnished Slate	Burnished Slate Crinkle	Charcoal	Charcoal Crinkle	Copper Metallic	Dark Gray	Dark Gray Crinkle	Dark Red	Evergreen	Green Crinkle	Gallery Blue	Galvalume	Galvanized G90	Ivory	Ivy Green	Light Stone	Mossy Oak Camo	Ocean Blue	Hawaiian Blue	Pewter Gray	Rural Red	Red Crinkle	Tan	Taupe	Taupe Crinkle	
29ga	●	●	●	●	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●	●	●	●	●	●	●		
26ga	●		●	●		●		●	●	●				●	●		●			●		●			●	●	●	●	●	●			●		●	●	●	●		
29ga G100	●			●		●		●	●	●		●			●		●			●		●	●	●	●	●	●		●	●		●	●	●			●	●	●	

Panel Specifications:

29 & 26ga Galvalume AZ50 provides a rust protectant substate

29ga G100 works great in high corrosive animal environments.

Steel Thickness:

26ga: 0.0185" | 29ga: 0.0153"

UL Ratings:


2218A: Impact Resistance | Class 4

790: Fire Test

580: Uplift Resistance

A UL2218A rating may help qualify for a homeowners insurance discount. Check with your local insurance agent.

Screw Pattern for Midwest and Pro Panel:

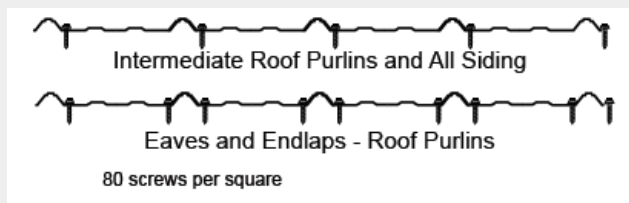

Paint Thickness:

