


SS675 Panel



- Residential and Commercial Applications
- No exposed screws
- 40 Year Paint Warranty
- 2:12 Minimum Roof Pitch
- Sherwin Williams Weather XL

26
Gauge

SS675 Panel is used for commercial and residential projects. It features a hidden fastener design leaving no exposed screws on the panels. The panels snap together making the installation smoother. 26 gauge is a great choice for most projects and adds more durability to your roof. The higher rib tends to give the panel more of a commercial look. SS675 Panels have a 14" coverage and a 1 3/4" rib height.

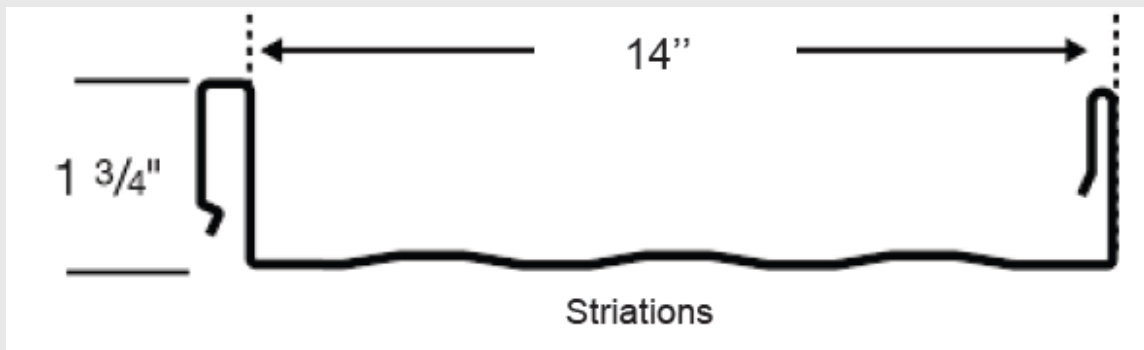

SS675 Panel

Color Availability

	Alamo White	White Crinkle	Arctic White	Ash Gray	Ash Gray Crinkle	Black	Black Crinkle	Brite Red	Brown	Brown Crinkle	Burgundy	Burgundy Crinkle	Burnished Slate	Burnished Slate Crinkle	Charcoal	Charcoal Crinkle	Copper Metallic	Dark Gray Crinkle	Dark Red	Evergreen	Galvalume	Green Crinkle	Ivy Green	Light Stone	Ocean Blue	Pewter Gray	Red Crinkle	Rural Red	Taupe	Taupe Crinkle
26ga	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Panel Specifications:

26ga Galvalume AZ50 provides a rust protectant substate

Panels can be run onsite or crated and delivered


Panels can be notched to give it a cleaner look at the eaves

Steel Thickness:
26ga: 0.0185"

UL Ratings:
2218A: Impact Resistance | Class 4
790: Fire Test
580: Uplift Resistance

A UL2218A rating may help qualify for a homeowners insurance discount. Check with your local insurance agent.

Paint Thickness:

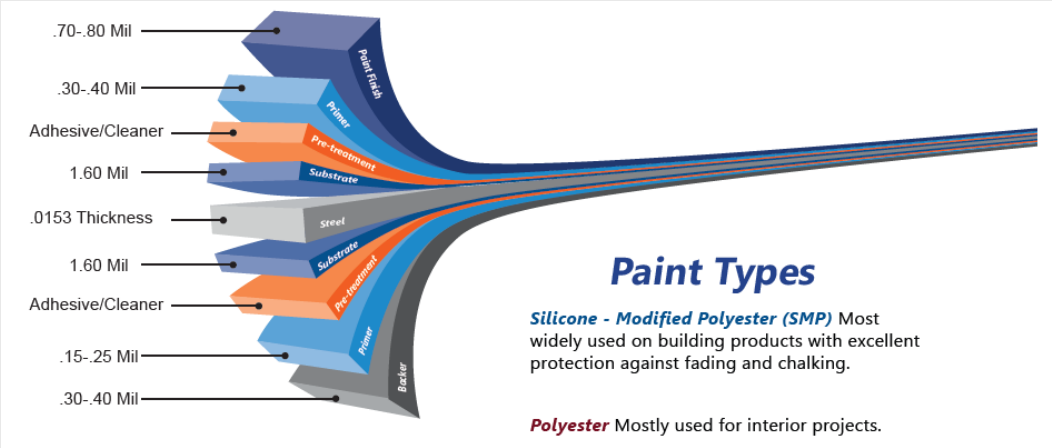

A Higher Level of Service & Quality