



Suitable for a wide range of applications, such as pneumatic control systems, demanding a flexible and cut-resistant tube with maximum kink-resistance and minimum kink memory.

### Key Features:


- Low temperature flexibility.
- Exceptional abrasion resistance.
- Maximum kink-resistance; minimum kink memory.
- Resistant to a wide range of chemicals.
- Compliant with FDA regulations.
- Easy to fit in confined spaces.
- Meets the standards of the push fit type couplings.
- Silicone free.
- 95/98 Shore A hardness.
- Service Temperature -40°C to + 55°C.
- 4:1 safety factor.
- RoHS 3 compliant.

### Sizes:

Available in 30 m coils  
 4 mm, 6 mm, 8 mm, 10 mm & 12 mm OD  
 Custom lengths and sizes available subject to minimum order quantity

### Colours:

Blue, black, red, clear, yellow and green

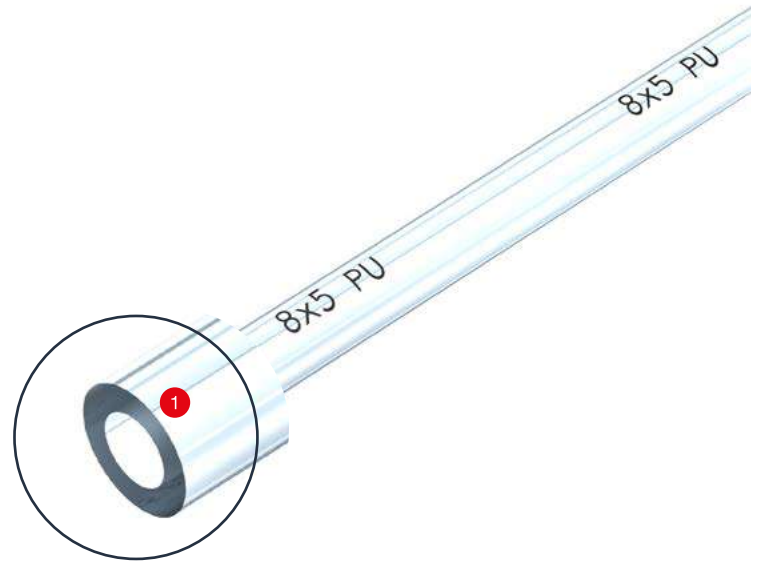

1. Polyester based thermoplastic polyurethane



### Applications:

- Pneumatic control systems/tools
- Fuel and lubrication lines
- Chemical transfer
- Food/liquid substances

Colour	Series	Description	ID (mm)	TOL (mm)	OD (mm)	TOL (mm)	Length (m)	Max WP (Bar)	Min BP (Bar)	Weight per Metre (Kg)	Bend Radius (mm)
● NATURAL	CPU	4 x 2.5 Polyurethane Tube	2.5	±0.10	4	±0.10	30	10	40	0.01	12
● BLUE	CPU	4 x 2.5 Polyurethane Tube	2.5	±0.10	4	±0.10	30	10	40	0.01	12
● ORANGE	CPU	4 x 2.5 Polyurethane Tube	2.5	±0.10	4	±0.10	30	10	40	0.01	12
● BLACK	CPU	4 x 2.5 Polyurethane Tube	2.5	±0.10	4	±0.10	30	10	40	0.01	12
● NATURAL	CPU	6 x 4 Polyurethane Tube	4	±0.10	6	±0.10	30	10	40	0.023	15
● BLUE	CPU	6 x 4 Polyurethane Tube	4	±0.10	6	±0.10	30	10	40	0.023	15
● ORANGE	CPU	6 x 4 Polyurethane Tube	4	±0.10	6	±0.10	30	10	40	0.023	15
● BLACK	CPU	6 x 4 Polyurethane Tube	4	±0.10	6	±0.10	30	10	40	0.023	15
● NATURAL	CPU	8 x 5 Polyurethane Tube	5	±0.10	8	±0.10	30	10	40	0.04	20
● BLUE	CPU	8 x 5 Polyurethane Tube	5	±0.10	8	±0.10	30	10	40	0.04	20
● BLACK	CPU	8 x 5 Polyurethane Tube	5	±0.10	8	±0.10	30	10	40	0.04	20
● NATURAL	CPU	10 x 6.5 Polyurethane Tube	6.5	±0.10	10	±0.10	30	10	40	0.044	25
● BLUE	CPU	10 x 6.5 Polyurethane Tube	6.5	±0.10	10	±0.10	30	10	40	0.044	25
● BLACK	CPU	10 x 6.5 Polyurethane Tube	6.5	±0.10	10	±0.10	30	10	40	0.044	25
● NATURAL	CPU	12 x 8 Polyurethane Tube	9	±0.12	12	±0.12	30	10	40	0.069	38
● BLUE	CPU	12 x 8 Polyurethane Tube	9	±0.12	12	±0.12	30	10	40	0.069	38
● BLACK	CPU	12 x 8 Polyurethane Tube	9	±0.12	12	±0.12	30	10	40	0.069	38