


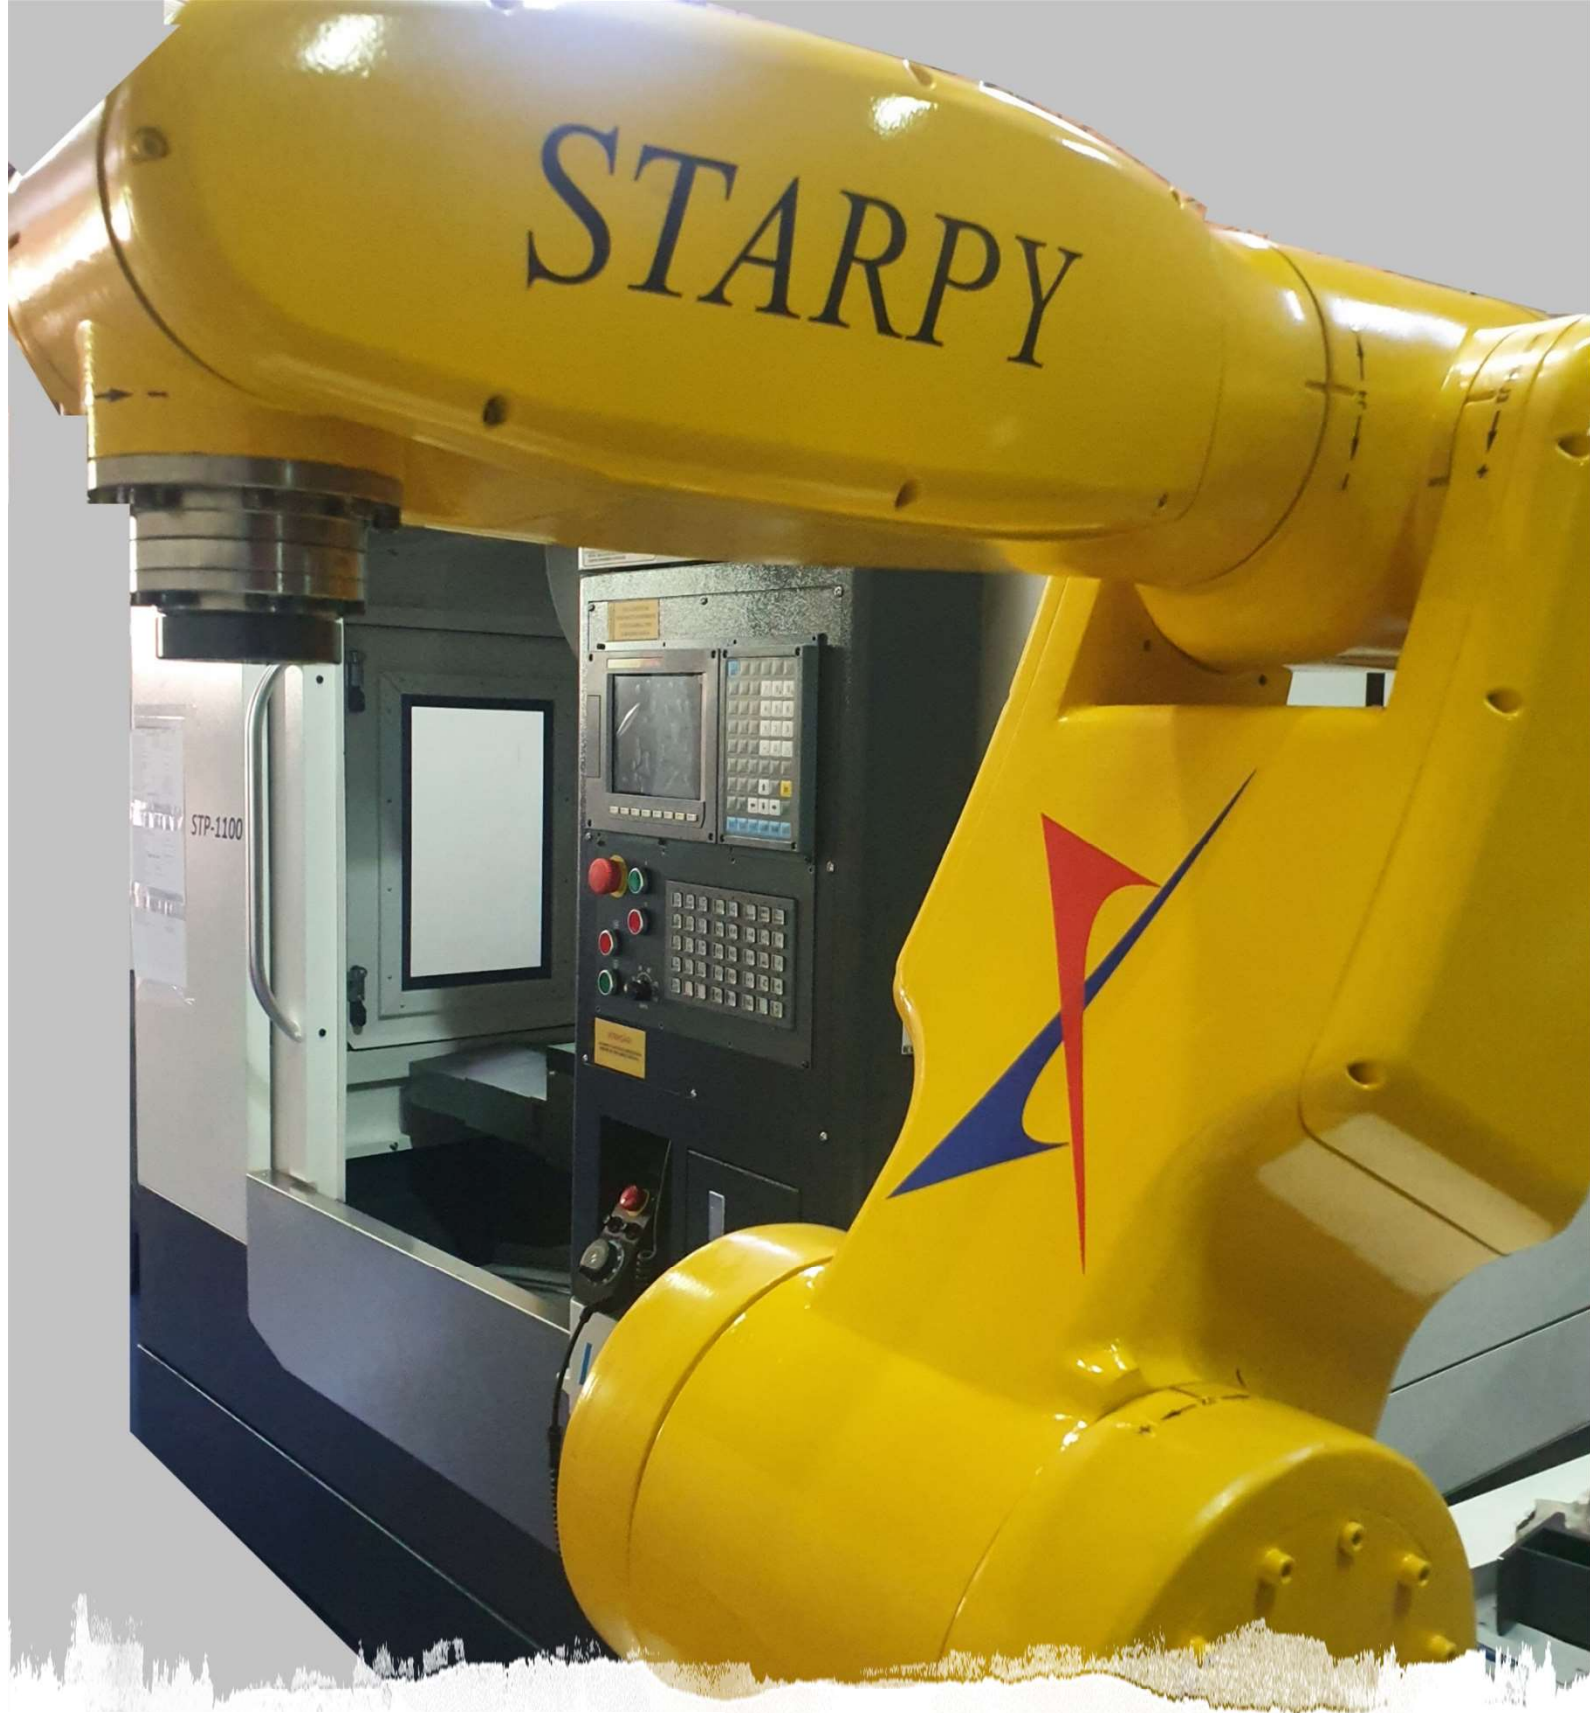

STARPY

MAQUINAS & EQUIPOS

ROBOTS
INDUSTRIAIS

TKB070

Payload : 7kg
Arm Reach : 910mm




MAQUINAS & EQUIPOS

Model	TKB070
Payload	7KG
Max Working Radius	910mm
DOF	6-Axis
Body Weight	50KG
Reducer Brand	imported
Motor Brand	imported
Drive Brand	imported
Rated Power	2.9KW
Max Speed	J1 322° /s
	J2 322° /s
	J3 240° /s
	J4 367° /s
	J5 516° /s
	J6 516° /s
Max Operation Area	J1 ± 170°
	J2 110° ~ - 75°
	J3 50° ~ - 120°
	J4 ± 160°
	J5 ± 120°
	J6 ± 360°
Protective Specification	J5J6 IP67
	Other IP54
Position Repeat Accuracy	±0.03mm
Control cabinet	TRC3-A06
Working Temperature	0~45°C



Motion Range

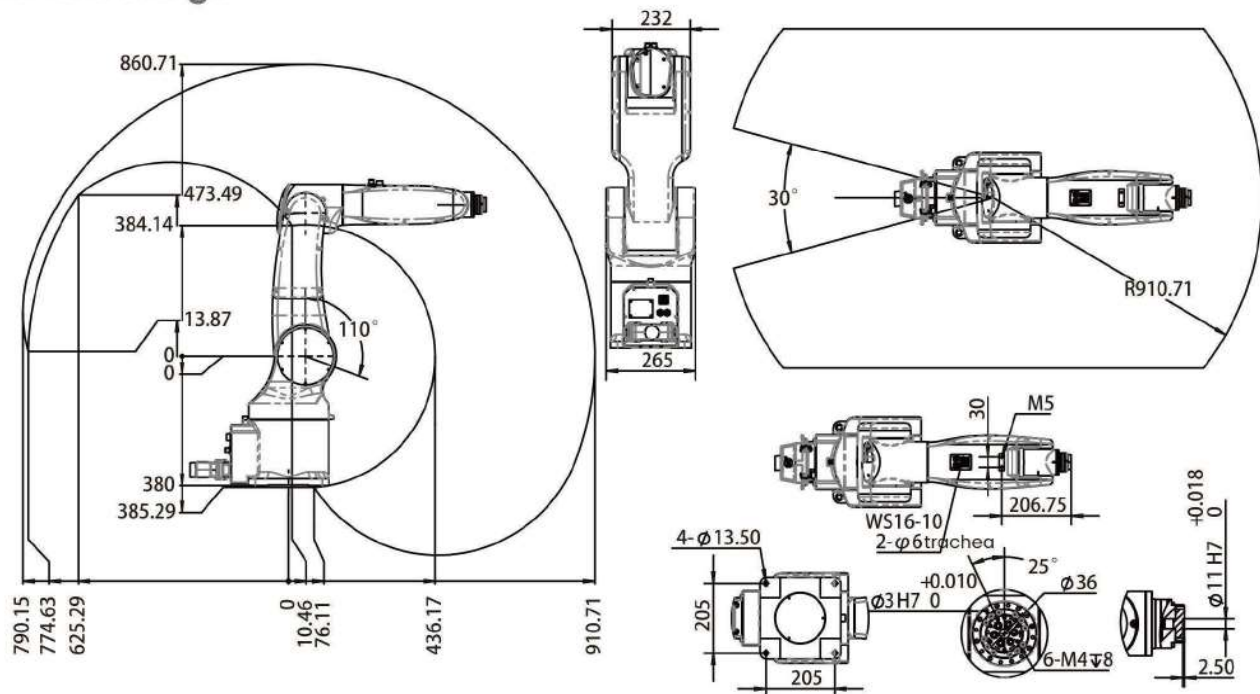

Base installation drawing

Flange mounting drawing

TKB2670

Payload : 20kg
Arm Reach : 1721mm




STARPY

MAQUINAS & EQUIPOS

Model	TKB2670	
Payload	20KG	
Max Working Radius	1721mm	
DOF	6-Axis	
Body Weight	210KG	
Reducer Brand	imported	
Motor Brand	imported	
Drive Brand	imported	
Rated Power	7.5KW	
Max Speed	J1	140 °/s
	J2	111 °/s
	J3	148 °/s
	J4	234 °/s
	J5	225 °/s
	J6	360 °/s
Max Operation Area	J1	± 160°
	J2	150° ~ -90°
	J3	80° ~ -100°
	J4	± 150°
	J5	± 110°
	J6	± 360°
Protective Specification	54	
Position Repeat Accuracy	±0.1mm	
Control cabinet	TRC5-B06	
Working Temperature	0~45°C	



Motion Range

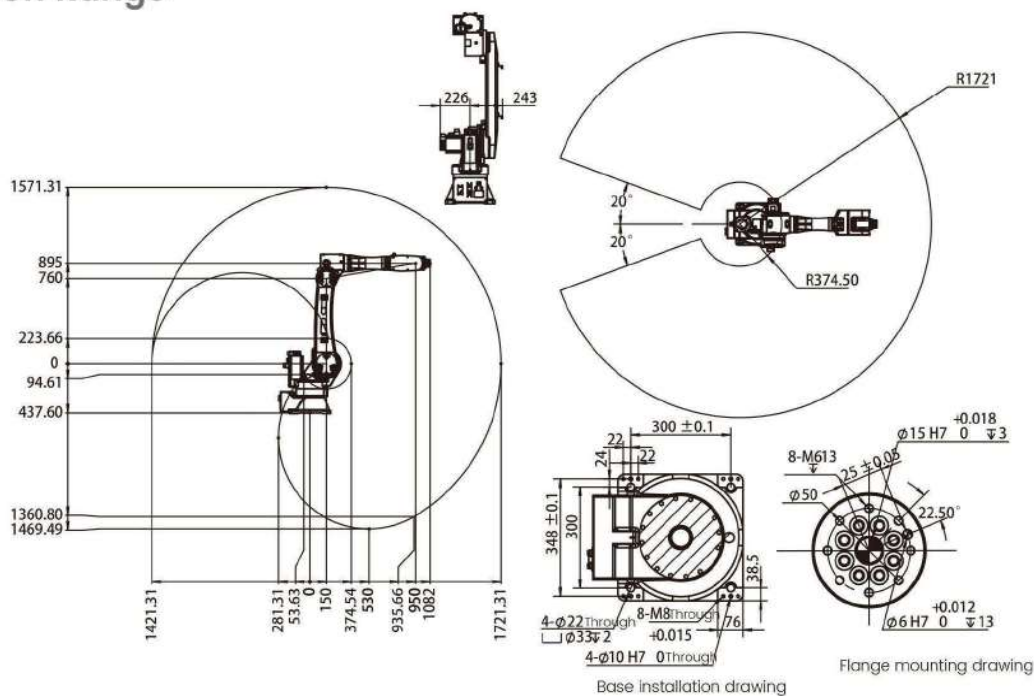

TKB1400

Payload : 6kg
Arm Reach : 1412mm




STARPY

MAQUINAS & EQUIPOS

Model	TKB1400	
Payload	6KG	
Max Working Radius	1412mm	
DOF	6-Axis	
Body Weight	160KG	
Reducer Brand	imported	
Motor Brand	imported	
Drive Brand	imported	
Rated Power	4.8kW	
Max Speed	J1	149 °/s
	J2	149 °/s
	J3	149 °/s
	J4	229 °/s
	J5	180 °/s
	J6	270 °/s
Max Operation Area	J1	± 170°
	J2	153° ~ -92°
	J3	80° ~ -100°
	J4	± 140°
	J5	± 120°
	J6	± 360°
Protective Specification	43	
Position Repeat Accuracy	±0.05mm	
Control cabinet	TRC5-B06	
Working Temperature	0~45℃	



Motion Range

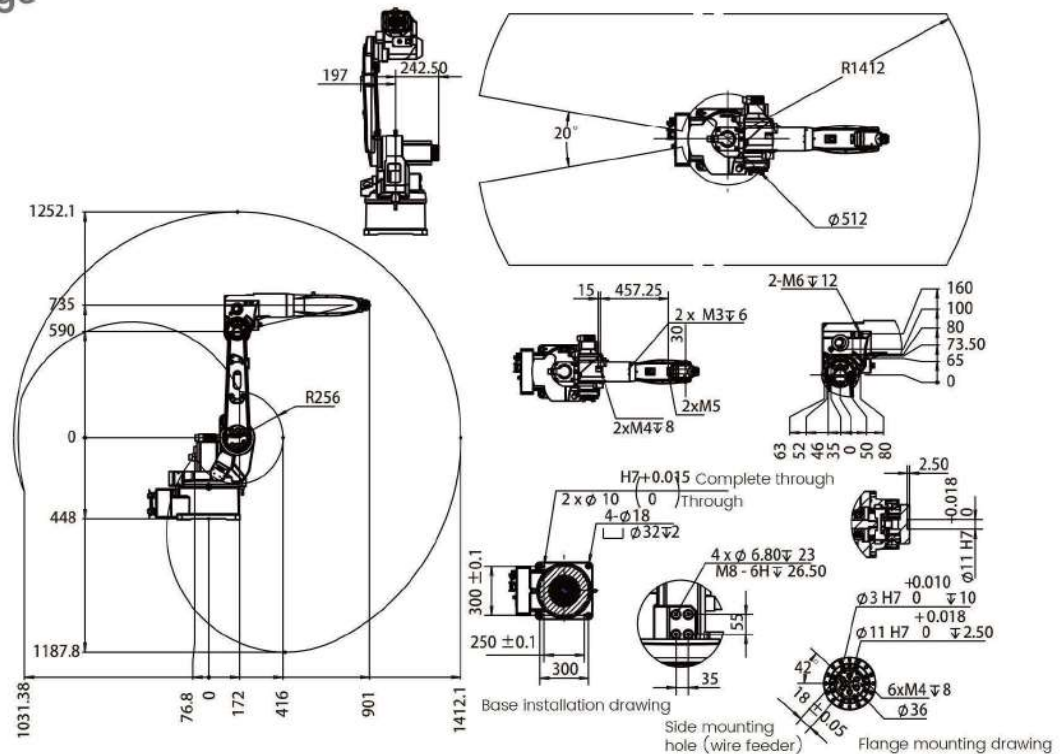

TKB5600

Payload : 50kg
Arm Reach : 2100mm




STARPY

MAQUINAS & EQUIPOS

Model	TKB5600	
Payload	50KG	
Max Working Radius	2100mm	
DOF	6-Axis	
Body Weight	600KG	
Reducer Brand	imported	
Motor Brand	imported	
Drive Brand	imported	
Rated Power	13.8KW	
Max Speed	J1	125 ° /s
	J2	105 ° /s
	J3	110 ° /s
	J4	120 ° /s
	J5	135 ° /s
	J6	200° /s
Max Operation Area	J1	± 160 °
	J2	135°~90 °
	J3	215°~140°
	J4	± 200°
	J5	± 120°
	J6	± 360°
Protective Specification	J5J6	IP67
	Other	IP54
Position Repeat Accuracy	±0.08mm	
Control cabinet	TRC3-C06	
Working Temperature	0~45°C	



Motion Range

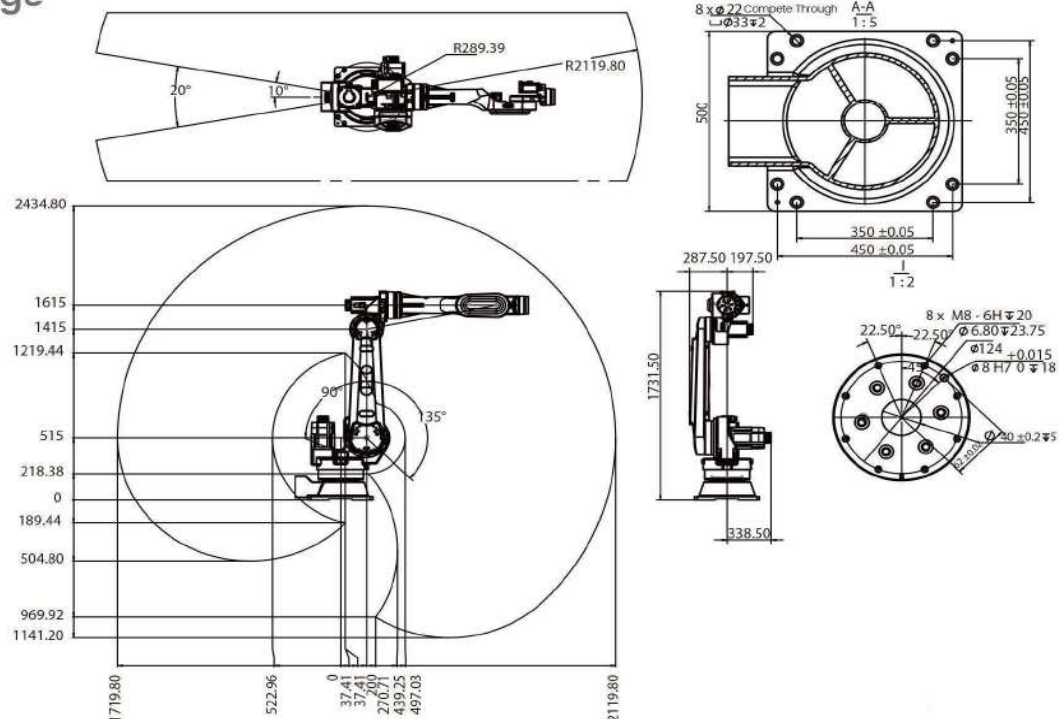

TKB6700

Payload : 165/180kg
Arm Reach : 2700mm




STARPY

MAQUINAS & EQUIPOS

Model	TKB6700	
Payload	165kg/180kg	
Max Working Radius	2700mm	
DOF	6-Axis	
Body Weight	1131KG	
Reducer Brand	Shanghai Turin Customization	
Motor Brand	imported	
Drive Brand	imported	
Rated Power	25kW	
Max Speed	J1	123 °/s
	J2	115 °/s
	J3	112 °/s
	J4	179 °/s
	J5	172 °/s
	J6	219 °/s
Max Operation Area	J1	± 185 °
	J2	-50°~85°
	J3	-155°~120°
	J4	± 350 °
	J5	± 125 °
	J6	± 350 °
Protective Specification	J5J6	IP65
	Other	IP54
Position Repeat Accuracy	±0.1mm	
Control cabinet	Eddie Electric control cabinet	
Working Temperature	0~45°C	



Motion Range

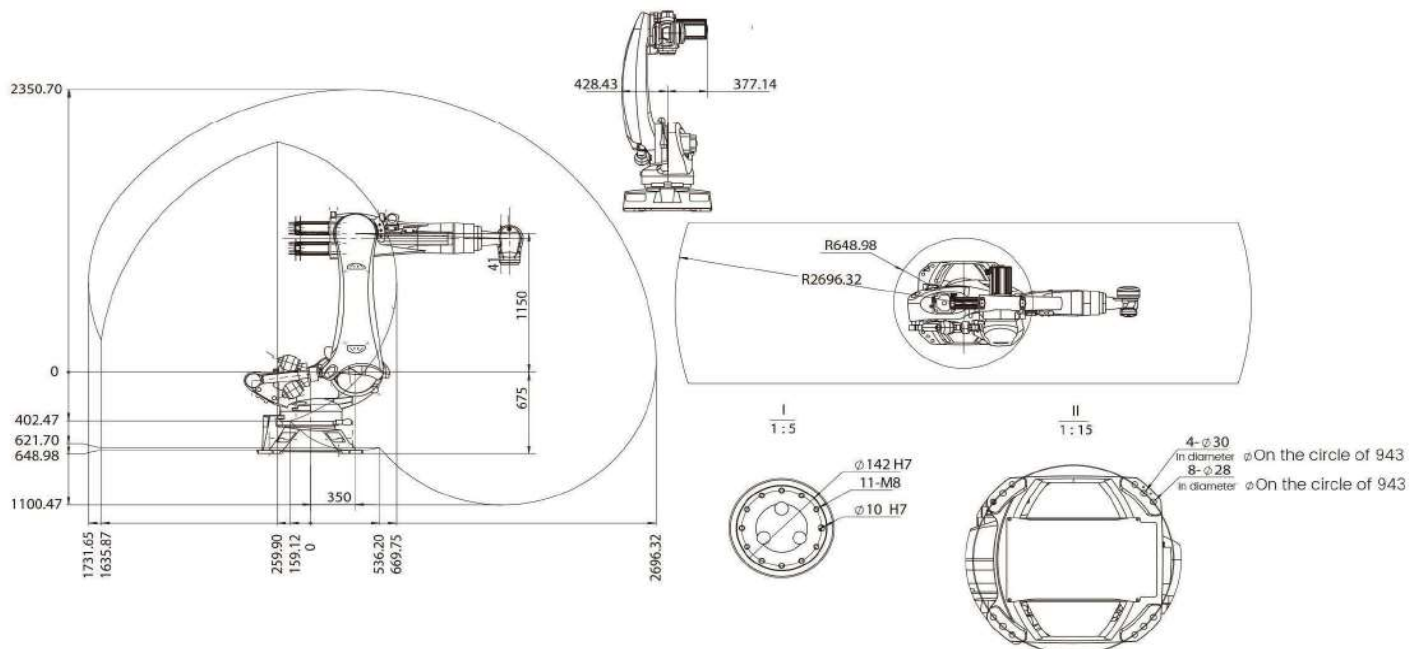

TKB460

Payload : 30kg
Arm Reach : 1840mm



STARPY

MAQUINAS & EQUIPOS

Model	TKB460	
Payload	30KG	
Max Working Radius	1840mm	
DOF	4-Axis	
Body Weight	240KG	
Reducer Brand	imported+customized	
Motor Brand	imported	
Drive Brand	imported	
Rated Power	7.2KW	
Max Speed	J1	140°/s
	J2	111°/s
	J3	148°/s
	J4	225°/s
Max Operation Area	J1	±160°
	J2	85°~30°
	J3	75°~100°
	J4	±360°
Protective Specification	IP54	
Position Repeat Accuracy	±0.1mm	
Control cabinet	TRC5-B06	
Working Temperature	0~45°C	



Motion Range

