



Committed to the Cut.®

# 100V SERIES 200V-G4 SERIES



**...IT'S MOW DAY!**



Featured 225V-G4

## MIDMOUNT™ V SERIES MOWERS

A compact package that easily transports on trailers and fits into shop or garages with limited space, MidMount™ V Series mowers deliver True ZeroTurn™ maneuverability for flawless residential and commercial mowing. Zip in and out of tight spaces you never imagined a riding mower could reach, leaving a perfectly manicured cut with comfortable control. Best of all, you'll enjoy the proven dependability of a commercial-grade Grasshopper mower that will outlast big box store mowers and deliver the perfect cut and enduring value you expect for years to come.



### WHEN BUYING YOUR NEXT MOWER, LOOK FOR THESE COMMERCIAL-GRADE FEATURES:

- 5.5-inch deep deck\* for superior airflow and exceptional durability
- 5-bolt wheel pattern distributes stress of curb shocks
- Dust-proof fork bearings for longevity and reduced maintenance
- Angled, reinforced leading edge on decks for maximum impact protection
- 8-inch spindle flanges with 6-bolt pattern for added strength
- Sentry™ spindle guards shield lower housing and bearings from dirt and fiber wrap
- Split-steel pulleys have exceptional durability and promote longer belt life
- Kevlar-type belts and spring-tensioning extends belt life
- Formed-steel, double-layered spindle plane is nearly 1-inch thick in stress zones
- ¼-inch thick MARBAIN® steel blades hold their edge longer requiring less sharpening
- Fused, automotive-style circuits are easily replaced
- Aluminized steel fenders resist corrosion.
- Lower debris-ingestion guards shroud internal components from harsh elements
- Service-friendly design with fewer grease points and easy access to belts.
- Iso-mounted footrest reduces vibration on feet
- Commercial engine offerings
- Premium Comfort seat with breathable, rip-resistant CoolTemp Cordura® fabric

\*4.5-inch deck on 124V-41.

### YOUR SAFETY IS OUR PRIORITY.

Single-fill fuel tank located underneath the seat enhances low center of gravity for greater stability, traction and terrain-hugging comfort.

Hydraulically dampened steering levers deliver a smooth, responsive ride and return to neutral when released from both forward and reverse.

A system of interlock switches shuts down the engine if the operator leaves the seat with the PTO engaged or when the levers are in the operating position.



**QuikAjust™ Drop Pin™ Height Adjustment**  
 Raise and lower the MidMount™ deck with the foot pedal for precision cutting height adjustments from 1 to 5 inches in 1/4-inch increments, or to raise and lock the deck into transport position with the quick-set pivot latch.

Featured 125V

# COMFORT THE KEY TO PRECISE CONTROL

Comfort isn't just about how a mower makes you feel. It's also about how it affects your performance as an operator. A smoother ride means greater, more precise control at faster mowing speeds, so operator can stay refreshed, finish faster and leave a manicured finish.



## MOW IN COMFORT

Sink into a deep-cushioned, scuff-resistant CoolTemp Cordura®-covered Premium Comfort seat with padded lumbar support and steel-supported armrests. Coupled with an iso-mounted footrest that absorbs shocks, you'll mow longer without stopping.



## RESPONSIVE STEERING

The Hydra-Smooth™ dampened dual swing-out control levers deliver effortless control of speed and direction. They easily adjust to your reach, and automatically return to neutral from forward or reverse when released. The dual swing-away lever design was introduced to the industry by Grasshopper in 1969.



## ERGONOMIC CONTROLS

Eliminate twisting or turning with our ergonomically designed View-Eze™ operator station. It maximizes visibility and puts operational controls and an adjustable cup holder at your fingertips.



## SIZED FOR PRODUCTIVITY

Thanks to a low center of gravity and compact wheelbase, a MidMount™ V Series mower lets you move in and out of tight spaces with precise handling and superior traction.

Models may be shown with optional equipment.



## FIELD TESTED & PROVEN

Engines and transmissions are field-tested for thousands of hours before they are approved for production models. In addition, every mower we manufacture is run and tested before it leaves the factory to ensure that it lives up to our quality standards.

# ENGINES & TRANSMISSIONS: DRIVES LIKE NO OTHER

You'll never be short on power with a Grasshopper V Series mower, thanks to commercial-grade engines and transmissions that ensure powerful, reliable performance and smooth, consistent operation.

## FULLY HYDRAULIC TRANSMISSION 100V SERIES

Enhanced cut quality, thanks to design-matched, fully hydraulic transmissions with variable displacement, piston-type pumps and high-torque wheel motors. Transmissions transfer more power to the cutting deck for quieter operation, longer service life and enhanced traction that prevents wheel slip in turns. An in-line CoolFan™ hydro cooling system helps maintain optimum temperatures for smoother, more reliable operation and longer service intervals.

## G4 TRANSMISSION 200V-G4 SERIES

G4 Hydro-Gear ZT-4400 transmissions are sealed systems that feature self-contained, heavy-duty commercial transaxles with steel-cut gears and a charge pump with shock valves that provide a powerful, smooth response. Integrated cooling fans and 1-3/8-inch axles extend service life. Enjoy best-in-class transmission fluid change intervals, reducing costs and maintenance time. Grasshopper's intelligent design channels more power to the cutting deck to maintain optimum blade tip speed, enhance cut quality and deliver quiet, reliable operation.



## YOUR CHOICE OF ENGINES:

Designed specifically for turf care applications, these professional-grade V-Twin engines are designed to deliver maximum torque and an extended service life.



### B&S COMMERCIAL TURF 124V/127V

Commercial-grade engine with heavy-duty components enhances power and reliability, while a 5-step Integrated Cyclonic Air Management system provides clean performance and longer service intervals.



### KOHLER CONFIDANT 125V/225V-G4

Commercial engine maximizes airflow, reduces operating temperatures and extends service intervals with cyclonic air filter and QuadClean™ multi-stage air filtration to protect against airborne debris.



### B&S VANGUARD 226V-G4

Remote-mounted, centrifugal multi-stage air cleaner with advanced debris management offers clean, reliable performance and extends service intervals and service life for commercial applications.

# EXTRA-DEEP CUTTING DECKS

## DESIGNED FROM THE BLADES UP

From transmissions that transfer more power to the cutting deck, to extra-deep, 5.5-inch decks\* with specially designed cutting chambers that enhance airflow for better clipping distribution, Grasshopper mowers deliver a picture-perfect cut.



### ONE DECK

#### THREE WAYS TO HANDLE CLIPPINGS

Easily convert the same deck from standard side discharge to optional PowerVac™ Collection, or add a Down Discharge™ mulching package. The Down Discharge mulching system (more than just a discharge restriction plate) reroutes airflow and clippings into a vortical pattern reducing the size of grass particles and drives them deep into the turf.



SIDE DISCHARGE



MULCHING SYSTEM



COLLECTION SYSTEM

## 100V & 200V-G4 OPTIONS

### DEDICATED REAR DISCHARGE

Equip your V Series mower with a 48-inch or larger 4X Rear Discharge™ (4XRD) deck to evenly distribute clippings out back and keep them off sidewalks, driveways and planting beds.



### GRASS-GROOMING STRIPING KIT

Deck-mounted, multi-ply rubber belt "combs" grass into crisp, uniform stripes. Available for 48-inch and larger decks.



### SPEEDTRIMMING™ & TRIMAIDE™ ROLLER KITS

SpeedTrimming™ for 61-inch decks and TrimAide™ for 52-inch decks feature vertical rollers to speed close trimming near buildings, chain link fences and landscaping.



SpeedTrimming™ Heavy-Duty Roller Kit


### SIDE DISCHARGE CONTROL KIT

Closed position closes the side of the deck and raises the discharge chute out of the way. Discharge is released from the rear of the deck to keep clippings out of flowerbeds and off sidewalks. Open position lowers the chute for regular side discharge operation. Available for 48-inch and larger decks.

*(Does not provide a mulching function)*



CLOSED

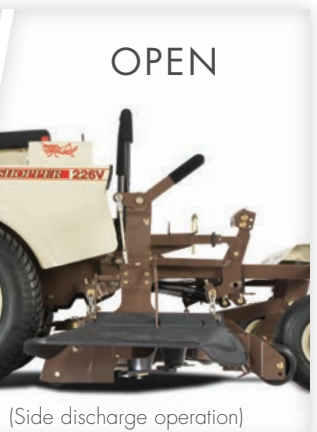

OPEN


(Side discharge operation)

Models may be shown with optional equipment.

\*4.5-inch deck on 124V-41.


# DEPENDABILITY THIS MAY BE THE LAST MOWER YOU EVER OWN

If you're buying a Grasshopper mower for a new property, chances are your V Series mower will still be going strong when you pay off the mortgage. V Series mowers are built with robotically welded high-grade U.S. steel, a unitized tubular exoskeletal™ frame and formed steel I-beam reinforcement designed to withstand years of use. A fusion-bonded, powder-coat finish will keep your mower looking like new.

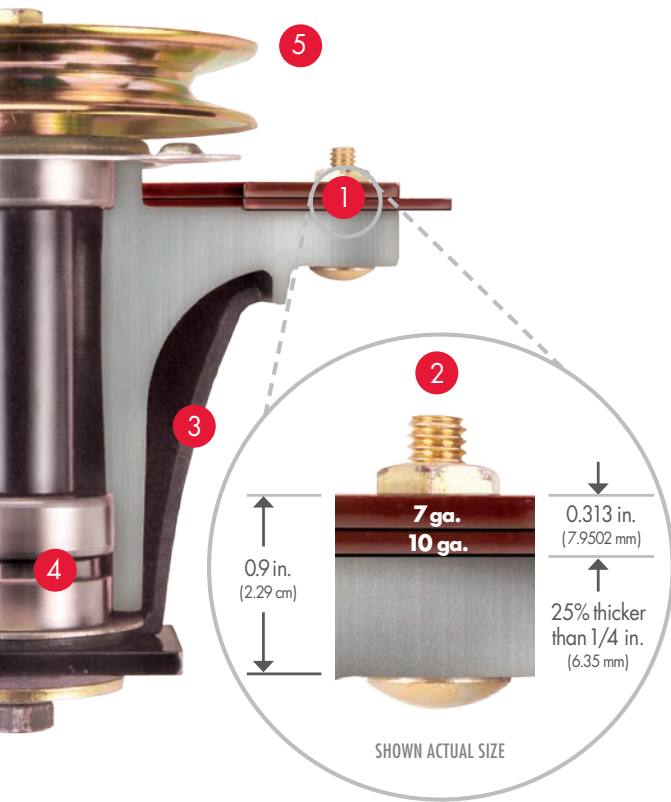

## THE INDUSTRY'S TOUGHEST SPINDLES

1. Massive 8-inch spindle flanges anchored in a 6-bolt pattern spread the force of impact for greater strength in tough mowing applications.
2. Double-layered, formed steel spindle plane across all spindles is nearly 1-inch thick in stress zones.
3. Sentry™ spindle guards shield the spindle housing and seal lower bearings from fiber wrap, fishing line and plastic bags, as well as dirt ingestion.
4. Precisely-turned, ground and polished spindle shafts, with non-greaseable double bearings are designed for high-rotational speeds and minimal maintenance, and keep out dirt and moisture without the need for oversized spindles. Components can be replaced without the need to replace the entire spindle.
5. Split-steel pulleys are stronger than cast iron or stamped pulleys for exceptional durability to withstand wear and prolong belt life.

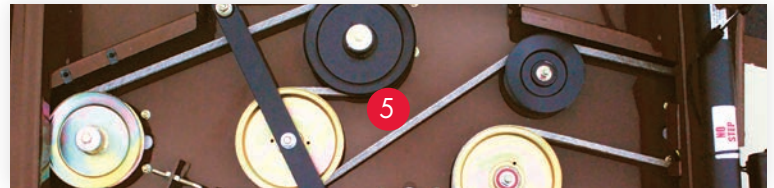

## HEAVY-DUTY CUTTING DECKS

Extra-deep, robotically welded decks are fabricated out of heavy-gauge formed U.S. steel, so they're stronger than stamped steel decks. An anvil-edge design, with reinforced leading edge, protects against the bumps and scrapes common to mowing.

## A CHOICE OF BLADES FOR THE BEST CUT

GrassMax™ blades are specially designed to create the airflow needed for a precision cut in a wide variety of conditions. All six types of GrassMax™ MARBAIN® blades are 1/4-inch thick and are through-hardened to hold their edge longer, delivering a better cut and twice the life of aftermarket blades.




**High-Low Mulching**  
Down Discharge™ mulching



**Medium Lift**  
PowerVac™ collection



**Contour**  
Best manicured cut



**High-Lift Notched**  
Standard side discharge



**Extreme High-Lift Notched**  
Lush or overgrown areas  
(23 hp or larger air-cooled models)



**Shredder™**  
Shredding dry leaves



Make sure you have genuine GrassMax™ blades! Look for the Grasshopper logo and part number on the grass side of the blade.



High-Lift Notched blades are also available with LaserEdge™ technology that requires little or no sharpening for the life of the blade.



\*4.5-inch deck on 124V-41.



Featured 124V



The optional **Air Dam Control Kit** attaches under the front edge of the deck, in a predetermined location, to minimize dirt and dust blow-out when operating in dry and dusty conditions. Perfect for use with dry dusty leaf vacuum collection. Not available for Model 124V-41

# POWERVAC™ COLLECTION SYSTEMS

## THE PERFECT FINISH, EVERY TIME

Get a clean, manicured finish every time — even in high-moisture conditions. Simply adjust the mowing speed to match conditions, and PowerVac™ will pick up virtually any type of debris. A dynamically balanced, trash-ingesting steel impeller reduces and compacts debris, so you can mow longer without emptying the collector. The deck-driven Quik-D-Tatch® Vac system installs in minutes without tools, making it easy to switch to side discharge or Down Discharge™ mulching quickly and easily. *View videos of the PowerVac™ in operation at [grasshoppermower.com/powervac](http://grasshoppermower.com/powervac).*



### MESH BAGS

Twin 4-cu.-ft. reinforced, UV-resistant, rip- and tear-resistant bags remove easily to empty debris.



### HT MODELS

Model 8HT features a hinged metal top for exceptional durability, along with a metal prop that keeps the lid open for easy emptying.



### VERTICAL VAC SYSTEM

Pass through narrow openings with the Vertical Vac System, which mounts easily on any 41-inch deck to minimize overall width.



### AIRSTREAM™ VAC

Designed for budget-conscious consumers, the non-impeller AirStream™ Vac for 41-inch decks provides narrow access and enhanced performance on manicured properties.

MODEL - CUTTING WIDTH	8F	8HT
<b>Capacity</b>		
8 cu. ft. (227 liters)	•	•
<b>Compatibility</b>		
100V Series	•	•
200V-G4 Series	•	•
<b>Collector Type</b>		
Rear-mounted; two slide-out mesh bags	•	•
<b>Collector Top</b>		
Hinged; fabric	•	
Hinged; metal		•
<b>Mount Kit</b>		
Included with collector	•	•
<b>Quik-D-Tatch® Vac Drive</b>		
Powered by a belt from the blade spindle. Mounts directly to the deck. Locked securely in place with thumbscrew. Includes Medium Lift blades.	•	•
<b>Hose</b>		
Semi-transparent, 6-inch diameter flex hose for visibility and clog resistance.	•	•
<b>Width w/Vac Unit Attached</b>		
41 in. deck	52.5 in. (133.4 cm)	
48 in. deck	60.5 in. (153.7 cm)	
52 in. deck	65.0 in. (165.1 cm)	
61 in. deck	73.5 in. (186.7 cm)	
<b>Mounted Length of Power Unit, Deck and Collector</b>		
Model 124V-41	99.0 in. (251.5 cm)	
Models 124V-48, 125V-48, 125V-52, 127V-52	98.0 in. (248.9 cm)	
Models 125V-61, 127V-61	101.0 in. (256.5 cm)	
Models 225V-G4/52	100.5 in. (255.3 cm)	
Models 225V-G4/61	103.0 in. (261.6 cm)	
Model 226V-G4/52	99.5 in. (252.7 cm)	
Model 226V-G4/61	102.0 in. (259.1 cm)	
<b>Weight* (Collection system only, includes required counterweight)</b>		
100V Series and 200V-G4 Series	220 lbs. (99.8 kg)	230 lbs. (104.3 kg)

\* Subtract 50 lbs. for AirStream™ Vac option (124V-41 only).

# 100V SERIES AIR-COOLED MIDMOUNT™

Step up to affordable,  
best-in-class performance.



LIMITED WARRANTY†

**2 YEAR**

— 500 HRS —  
**COMMERCIAL**

LIMITED WARRANTY†

**4 YEAR**

— 500 HRS —  
**RESIDENTIAL**

With a compact design and powerful features, 100V Series mowers deliver True ZeroTurn™ maneuverability, outstanding comfort and superior performance in even the tightest spaces.

With deck sizes from a gate-friendly 41 inches on the 100V-41 to larger 48-, 52- and 61-inch decks on larger 100V Series models, you can match your mower to your needs.

Design-matched, fully hydraulic Parker HTE Series integrated pump-and-wheel-motor transmissions with in-line cooling fans and fine-particle filtration. Provides best-in-class transmission fluid change intervals with no break-in period, reducing costs and maintenance.

Only two Access-Eze™ lubrication points cut maintenance time up to 95%.

Exceptionally durable 5.5-inch deep decks (4.5-inch for 124V-41) easily convert from wide-pattern side discharge to optional mulching or vacuum collection. QuikAjust™ DropPin™ Height Adjustment makes changing cutting heights fast and simple. Optional four-spindle 4XRD dedicated rear-discharge decks evenly distribute clippings out back for a smooth cut and no windrowing.

The deep-cushioned, deluxe Premium Comfort Seat features a coil-spring suspension and padded lumbar support with sliding 2-inch fore and aft adjustment for all-day comfort. Iso-mounting eliminates vibration even before it reaches the seat, and both padded seat and foldable armrests are covered in scuff-resistant, breathable CoolTemp Cordura® fabric, which dissipates heat and won't tear or crack with extended use.

ComfortReach™ provides 2 inches of adjustment at the base of the lever for a custom steering fit. No tools required.

A higher horsepower combined with a compact wheelbase provides a great power-to-size ratio.

A 6.5 gal/24.6 L single-fill fuel tank (124V features 3.0 gal/11.4 L tank) under the seat lowers the center of gravity of the machine, providing traction and stability for an enhanced ride. Standard bumper protects the rear of the mower while preserving easy access and removal of the service shield.

**124V**

41 48

724 cc, V-twin, OHV  
B&S Commercial turf  
gasoline engine

**125V**

48 52 61

747 cc, V-twin, OHV  
Kohler Confidant  
gasoline engine

**127V**

52 61

810 cc, V-twin, OHV  
B&S Commercial turf  
gasoline engine

**100V:** Make quick work of mowing  
with speeds up to 8.0 mph and 4.44 acres  
per hour with a 61-inch cutting deck.\*



## OPTIONS

- » Quik-D-Tatch® PowerVac™ Collection Systems (see page 7)
- » Down Discharge™ mulching packages (see page 5)
- » 4XRD Rear Discharge™ decks (see page 5)
- » Side discharge control kit – for 48-inch and larger decks (see page 5)
- » Foot pedal extension kit for QuikAjust™ DropPin™ height adjustment
- » TrimAide™ anti-scalp roller kit – for 52-inch deck (see page 5)
- » Speed-Trimming™ heavy-duty anti-scalp roller kit – for 61-inch deck (see page 5)
- » Air Dam kit – for dry, dusty conditions (see page 7)
- » LED work lights – plug-in ready
- » Yellow beacon light
- » Sunshade Canopy – vinyl or aluminum
- » Custom Cordura® weather cover
- » GrassMax™ blade options (see page 6)
- » Heavy-duty, grass-grooming striping kit (see page 5)
- » QuikAjust Tilt™ steering levers with “no tools” 9-inch comfort range – for 48-inch and larger models
- » DuraFlex™ suspension forks – for 48-inch and larger decks



Optional DuraFlex™  
Suspension Fork

# AIR-COOLED 100V SERIES - SPECIFICATIONS

MODEL - CUTTING WIDTH	124V-41	124V-48	127V-52	127V-61	125V-48	125V-52	125V-61
<b>ENGINE</b>							
<b>Type/Displacement/Cylinders</b>							
B&S Commercial Turf gasoline/44.2 cu in. (724 cc)/V-twin	•	•					
B&S Commercial Turf gasoline/49.4 cu in. (810 cc)/V-twin			•	•			
Kohler Confidant gasoline/45.6 cu in. (747 cc)/V-twin					•	•	•
<b>Lubrication System</b>							
Pressure Lube, Filter							
<b>Crankshaft</b>							
Vertical							
<b>Cooling System</b>							
Air							
<b>Fuel / Capacity</b>							
Gasoline - unleaded / 3.0 U.S. Gal (11.36 L)	•						
Gasoline - unleaded / 6.5 U.S. Gal (24.60 L)		•	•	•	•	•	•
<b>Air Cleaner</b>							
Integrated, cyclonic air cleaner with 5-step debris management system	•	•	•	•			
Heavy-duty cyclonic air filter with QuadClean™ multi-stage air filtration					•	•	•
<b>Muffler</b>							
Ultra-quiet, single, industrial type							
<b>MOWING DECKS</b>							
<b>Construction (Robotic-welded steel)</b>							
Double-layered 10-gauge plus 10-gauge formed-steel spindle plane 0.269 in. (6.83 mm) thick with 7-gauge skirts Anvil-edge design with 0.5 in. (12.7 mm) reinforcement on front edge of deck		•	•	•	•	•	•
<b>Blades (ADI MARBAIN®, 1/4-in.)</b>							
(2) 21 in. (53.5 cm)	•						
(2) 18 in. (45.7 cm), (1) 15 in. (38.1 cm)		•			•		
(3) 18 in. (45.7 cm)			•			•	
(3) 21 in. (53.5 cm)				•			•
<b>Spindle Assemblies</b>							
Turned, ground and polished 2.5 cm (approx. 1 in.) outside diameter (O.D.) precision shaft; spindle head designed to eliminate fiber wrap; double bearings, non-greasable.							
<b>Spindle Housing</b>							
8-in. (20.3 cm)-diameter machined aluminum housing with 6-bolt pattern							
<b>Spindle Cones</b>							
Spindle cones shield housing and lower bearings from fiber wrap and dirt ingestion		•	•	•	•	•	•
<b>QuikAjust™ DropPin™ Height Adjustment</b>							
Foot-controlled height adjustment pedal with pin							
<b>Cutting Height Range</b>							
1.0 – 5.0 in. (2.5 – 12.7 cm) in 1/4-inch increments							
<b>Blade Drive</b>							
Belt drive with single Kevlar V-belt & idler arm tensioning							
<b>STARTER &amp; ELECTRICAL SYSTEM</b>							
<b>Maintenance-Free Battery/Charging Capacity/Starter</b>							
12 Volt/15 amp/solenoid shift					•	•	•
12 Volt/16 amp/remote solenoid	•	•	•	•			
<b>Ignition</b>							
Breakerless							
<b>Interlock System</b>							
Prevents engine start when PTO clutch is engaged or steering levers are in drive position; allows operator dismount without engine shutdown only when PTO is disengaged and steering levers are locked in neutral							
<b>ULTIMATE OPERATOR STATION™</b>							
<b>Premium Comfort Seat</b>							
Iso-mounted, high-back, deep-cushioned, foam-padded Cordura®-covered, padded foldable arms (except 124V-41), padded backrest with lumbar support, coil-spring suspension and embroidered Grasshopper logo on seat back. Adjustable fore and aft.							
<b>Operator Protection</b>							
Operator Protection Structure (OPS) with seat belt							
<b>Suspension</b>							
Roomy, iso-mounted footrest with Shock Impact Reduction System™ (SIRS™)							

MODEL - CUTTING WIDTH	124V-41	124V-48	127V-52	127V-61	125V-48	125V-52	125V-61
<b>Console-Mounted Instruments</b>							
Digital hour meter, parking brake indicator light, ignition switch, choke and push/pull PTO switch							
<b>Work Lights (Pre-wired)</b>							
LED (optional)							
<b>TRANSMISSION &amp; STEERING</b>							
<b>Type</b>							
Design-matched hydrostatic system with in-line cooling fans; fully hydraulic, integrated Parker HTE Series transmission with variable displacement piston-type pumps and high-torque wheel motors for each drive wheel							
<b>Filtration/Hydro Fluid</b>							
Internal field-serviceable filter / No break-in oil change required; CoolTemp Hydro-Max™ fluid.							
<b>Speed</b>							
0 – 7.5 mph (0 – 12.1 kph) forward	•						
0 – 5.5 mph (0 – 8.9 kph) reverse							
0 – 8.0 mph (0 – 12.9 kph) forward		•	•	•	•	•	•
0 – 6.0 mph (0 – 9.7 kph) reverse							•
<b>Turning Radius</b>							
True zero degree, turns within own length with counter-rotating, independently powered drive wheels							
<b>Steering</b>							
One- or two-hand operation with adjustable Hydra-Smooth™ dual levers that automatically return to neutral from either forward or reverse position							
<b>Brakes</b>							
Dynamic braking through hydrostatic transmission							
<b>Parking Brake</b>							
Compression							
<b>TIRE SIZES</b>							
<b>Drive Wheels – Standard (5-bolt pattern)</b>							
20 x 10-8 turf	•						
20 x 10-10 turf		•	•		•	•	
20 x 12-10 turf				•			•
<b>Front Casters</b>							
13 x 5-6	•						
13 x 6.5-6 rib tread, pneumatic with double-sealed bearings		•	•	•	•	•	•
<b>DIMENSIONS (Mower &amp; Deck)</b>							
<b>Mulch or Rear Discharge Width/Length</b> (Add 1.5 in. (3.8 cm) to width for side discharge with deflector raised. Add 12.0 in. (30.5 cm) to width for side discharge with deflector.)							
42.5 in. (108.0 cm)/76.0 in. (193.0 cm)	•						
49.5 in. (125.7 cm)/75.0 in. (190.5 cm)		•			•		
53.5 in. (135.9 cm)/75.0 in. (190.5 cm)			•			•	
62.5 in. (158.8 cm)/78.0 in. (198.1 cm)				•			•
<b>Height (Seat back)</b>							
46.0 in. (116.9 cm)	•						
47.0 in. (119.4 cm)		•	•	•	•	•	•
<b>Height (Seat cushion)</b>							
28.0 in. (71.1 cm)	•						
29.0 in. (73.7 cm)		•	•	•	•	•	•
<b>Height (OPS)</b>							
57.5 in. (146.1 cm)	•						
59.0 in. (149.9 cm)		•	•	•	•	•	•
<b>Drive Tire Track Width (outside edge to outside edge)</b>							
41.5 in. (105.4 cm)	•						
44.5 in. (113.0 cm)		•	•		•	•	
49.5 in. (125.7 cm)				•			•
<b>WEIGHT</b>							
<b>Uncrated (Mower &amp; Deck)</b>							
700 lbs. (317.5 kg)	•						
810 lbs. (367.4 kg)		•			•		
830 lbs. (376.5 kg)			•			•	
880 lbs. (399.2 kg)				•			•
<b>Mulching Package</b> (Package includes high-low mulching blades.)							
17 lbs. (7.7 kg)	•						
25 lbs. (11.3 kg)		•			•		
29 lbs. (13.2 kg)			•			•	
36 lbs. (16.3 kg)				•			•

# 200V-G4 SERIES AIR-COOLED MIDMOUNT™

Take performance  
to the next level.



LIMITED WARRANTY†

**2 YEAR**

— 800 HRS —

COMMERCIAL

LIMITED WARRANTY†

**4 YEAR**

— 800 HRS —

RESIDENTIAL

**225V-G4**

52 61

747 cc, V-twin, OHV  
Kohler Confidant  
gasoline engine

**226V-G4**

52 61

810 cc, V-twin, OHV  
B&S Vanguard  
gasoline engine

**200V:** Increase your productivity with speeds up to 9.0 mph and 5.00 acres per hour with a 61-inch cutting deck.\*

**9 MPH**  
**5.00**  
ACRES PER HOUR\*

Enjoy comfort, performance and durability with a compact 200V Series mower. An ergonomic design and integrated, multi-point suspension, coupled with the industry's most comfortable seat, lets you stay comfortably in control — even at faster mowing speeds.

200V-G4 models feature G4 Hydro-Gear ZT-4400 transmissions, which are self-contained, heavy-duty commercial transaxles that provide powerful, smooth response. Integrated cooling fans and 1-3/8-inch axles extend service life, and best-in-class transmission fluid change intervals reduce costs and maintenance time.

Grasshopper's intelligent design transfers more power to the cutting deck to maintain optimum blade tip speed and enhance cut quality.

Only two Access-Eze™ lubrication points cut maintenance time up to 95%.

5.5-inch deep decks designed for exceptional durability easily convert from wide-pattern side discharge to optional mulching or vacuum collection. The QuikAjust™ DropPin™ Height Adjustment makes cutting height change fast and simple. Optional four-spindle 4XRD dedicated rear-discharge decks evenly distribute clippings out back for a smooth cut and no windrowing.

The deep-cushioned, deluxe Premier Comfort seat features a coil-spring suspension and padded lumbar support with sliding 2-inch fore and aft adjustment for all-day comfort. Iso-mounting eliminates vibration even before it reaches the seat, and both padded seat and foldable armrests are covered in scuff-resistant, breathable CoolTemp Cordura® fabric, which dissipates heat and won't tear or crack with extended use.


QuikAjust Tilt™ steering levers with "no tools" adjustment provide a 9-inch range for maximum comfort and fit.

A higher horsepower combined with a compact wheelbase provides a great power-to-size ratio.

The 6.5 gal/24.6L single-fill fuel tank under the seat lowers the center of gravity of the machine, providing traction and stability for an enhanced ride. Standard bumper protects the rear of the mower while preserving easy access and removal of the service shield.

## OPTIONS

- » Quik-D-Tatch® PowerVac™ Collection Systems (see page 7)
- » 4X Rear Discharge™ decks (see page 5)
- » Down Discharge™ mulching packages (see page 5)
- » Side discharge control kit (see page 5)
- » Foot pedal extension kit for QuikAjust™ DropPin™ height adjustment
- » TrimAide™ anti-scalp roller kit — for 52-inch decks (see page 5)
- » Speed-Trimming™ heavy-duty anti-scalp roller kit — for 61-inch decks (see page 5)
- » Air Dam kit — for dry, dusty conditions (see page 7)
- » LED work lights — plug-in ready
- » Yellow beacon light
- » Sunshade Canopy — vinyl or aluminum
- » Custom Cordura® weather cover
- » GrassMax™ blade options (see page 6)
- » Heavy-duty, grass-grooming striping kit (see page 5)
- » Wide seat conversion kit
- » Extended levers for taller operators
- » Foldable ROPS with adjustable seat belt
- » Bar tread, low-pressure tires
- » Michelin® X® Tweel® 24 x 12-12 Airless Turf Tires
- » Michelin® X® Tweel® 13 x 6.5-6 Airless Tail Wheels
- » DuraFlex™ suspension forks
- » Edge-EZE™ edger



Optional DuraFlex™  
Suspension Fork

# AIR-COOLED 200V-G4 SERIES-SPECIFICATIONS

MODEL - CUTTING WIDTH	225V-G4 52	225V-G4 61	226V-G4 52	226V-G4 61
<b>ENGINE</b>				
<b>Type/Displacement/Cylinders</b>				
Kohler Confidant gasoline/45.6 cu. in. (747 cc)/V-twin	•	•		
B&S Vanguard - gasoline/49.4 cu. in. (810 cc)/v-twin			•	•
<b>Lubrication System</b>				
Pressure Lube, Filter				
<b>Crankshaft</b>				
Vertical				
<b>Cooling System</b>				
Air				
<b>Fuel / Capacity</b>				
Gasoline - unleaded / 6.5 U.S. Gal (24.6 L)	•	•	•	•
<b>Air Cleaner</b>				
Heavy-duty cyclonic air filter with QuadClean™ multi-stage air filtration	•	•		
Remote-mounted, centrifugal multi-stage air cleaner with advanced debris management			•	•
<b>Muffler</b>				
Ultra-quiet, single, industrial type				
<b>MOWING DECKS</b>				
<b>Construction (Robotic-welded steel)</b>				
Double-layered 10-gauge plus 10-gauge formed-steel spindle plane 0.269 in. (6.83 mm) thick with 7-gauge skirts				
Spindle plane is 0.9 in. (22.86 mm) thick in stress zones; anvil-edge design with 0.5 in. (12.7 mm) reinforcement on front edge of deck				
<b>Blades (MARBAIN®, 1/4-in.)</b>				
(3) 18 in. (45.7 cm)	•		•	
(3) 21 in. (53.3 cm)		•		•
<b>Spindle Assemblies</b>				
Turned, ground and polished 2.5 cm (approx. 1 in.) outside diameter (O.D.) precision shaft; spindle head designed to eliminate fiber wrap; double bearings, non-greasable				
<b>Spindle Housing</b>				
8-in. (20.3 cm)-diameter machined aluminum housing with 6-bolt pattern				
<b>Spindle Cones</b>				
Spindle cones shield housing and lower bearings from fiber wrap and dirt ingestion				
<b>QuikAdjust™ DropPin™ Height Adjustment</b>				
Foot-controlled height adjustment pedal with pin				
<b>Cutting Height Range</b>				
1.0 - 4.5 in. (2.5 - 11.4 cm) in 1/4-inch increments				
<b>Blade Drive</b>				
Belt drive with single Kevlar V-belt & idler arm tensioning				
<b>STARTER &amp; ELECTRICAL SYSTEM</b>				
<b>Maintenance-Free Battery/Charging Capacity/Starter</b>				
12 Volt/15 amp/solenoid shift	•	•		
12 Volt/16 amp/solenoid shift			•	•
<b>Ignition</b>				
Breakerless				
<b>Interlock System</b>				
Prevents engine start when PTO clutch is engaged or steering levers are in drive position; allows operator dismount without engine shutdown only when PTO is disengaged and steering levers are locked in neutral				
<b>ULTIMATE OPERATOR STATION™</b>				
<b>Premium Comfort Seat</b>				
Iso-mounted, high-back, deep-cushioned, foam-padded Cordura®-covered, padded foldable arms, padded backrest with lumbar support, coil-spring suspension and embroidered Grasshopper logo on seat back; adjustable fore and aft				
<b>Operator Protection</b>				
ROPS with seat belt				
<b>Suspension</b>				
Roomy, iso-mounted footrest with Shock Impact Reduction System™ (SIRS™)				
<b>Console-Mounted Instruments</b>				
Low engine oil pressure, digital hour meter, parking brake indicator light, ignition switch, choke & push/pull PTO switch	•	•	•	•
<b>Work Lights (Pre-wired)</b>				
LED (optional)				

MODEL - CUTTING WIDTH	225V-G4 52	225V-G4 61	226V-G4 52	226V-G4 61
<b>TRANSMISSION &amp; STEERING</b>				
<b>Type</b>				
Heavy-duty Hydro-Gear ZT-4400 hydrostatic transmissions with cooling fans; integrated transaxles with 12 cc piston pumps and 16 cc piston motors, gear reduction, internal disc brakes, and 1-3/8 inch axles	•	•	•	•
<b>Filtration/Hydro Fluid</b>				
Self-contained fluid and internal filtration / CoolTemp Hydro-Max™ fluid withstands high and low temperature extremes for extended service intervals after 100-hour break in oil change				
<b>Speed</b>				
0 - 9.0 mph (0 - 14.5 kph) forward	•	•	•	•
0 - 6.0 mph (0 - 9.7 kph) reverse				
<b>Turning Radius</b>				
True zero degree, turns within own length with counter-rotating, independently powered drive wheels				
<b>Steering</b>				
One- or two-handed operation with QuikAdjust Tilt™ dual levers with 9-inch comfort range that automatically return to neutral from either forward or reverse position				
<b>Brakes</b>				
Dynamic braking through hydrostatic transmission				
<b>Parking Brake</b>				
Internal disc brake in transmission				
<b>TIRE SIZES</b>				
<b>Drive Wheels - Standard (5-bolt pattern)</b>				
23 x 10.5-12 turf type, 4-ply rated	•	•	•	•
<b>Front Casters</b>				
13 x 6.5-6 rib tread, pneumatic with double-sealed bearings				
<b>DIMENSIONS (Mower &amp; Deck)</b>				
<b>Mulch Width/Length</b> (Add 1.5 in. (3.8 cm) to width for side discharge with deflector raised. Add 12.0 in. (30.5 cm) to width for side discharge with deflector.)				
53.5 in. (135.9 cm)/76.0 in. (193.0 cm)	•		•	
62.5 in. (158.8 cm)/79.0 in. (200.7 cm)		•		•
<b>Height (Seat back)</b>				
46.0 in. (116.8 cm)				
<b>Height (Seat cushion)</b>				
30.0 in. (76.2 cm)				
<b>Height (ROPS)</b>				
68.0 in. (172.7 cm)				
<b>Drive Tire Track Width (outside edge to outside edge)</b>				
50.0 in. (127.0 cm)				
<b>WEIGHT</b>				
<b>Uncrated (Mower &amp; Deck)</b>				
960 lbs. (435.4 kg)			•	
980 lbs. (444.5 kg)	•			
1030 lbs. (467.2 kg)				•
1050 lbs. (476.3 kg)		•		
<b>Mulching Package</b> (Package includes high-low mulching blades.)				
29 lbs. (13.2 kg)	•		•	
36 lbs. (16.3 kg)		•		•

• Standard ○ Option



Committed to the Cut.®

## FIRST TO FINISH...BUILT TO LAST.®


Since the first Grasshopper rolled off the line in 1969, our goal has remained the same: to manufacture a mower that will produce a perfect cut day after day and retain its value as a re-sellable asset. By employing a skilled workforce using smart engineering, design-matched components and cutting-edge manufacturing technology, we build long-lasting equipment that stands up to rigorous demands. Call it Midwestern values or just good business sense. At Grasshopper, there's a constant pursuit of perfection. Perfection in the details. Perfection in the cut. It's our passion, because it's your passion, too.

Every mower is designed, engineered and assembled in Moundridge, Kansas, USA, and we run each one before it's shipped as a final quality assurance check. This attention to detail has earned a 99 percent approval rating from Grasshopper owners, and reflects our company's drive to be both innovative and responsive to our customers – turf care professionals, government entities and equipment owners from across America and around the world.

At Grasshopper, we take pride in designing products and using production methods that respect the environment. Our computer-aided design and advanced manufacturing techniques ensure little goes to waste in the creation of Your Next Mower®, earning us state-level and national recognition for our pollution-prevention practices. With our focus on fuel-efficient power units and time-saving operation, you can take pride in creating the aesthetic and ecological advantages that well-maintained lawns are proven to provide.

### EXPERIENCE THE DIFFERENCE FOR YOURSELF.

Visit [GrasshopperDealers.com](http://GrasshopperDealers.com) to find a dealer near you or schedule a demonstration.

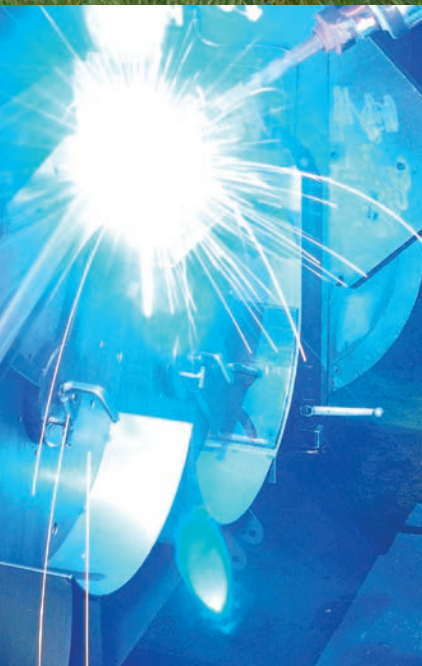

The Grasshopper Company | 105 Old U.S. Highway 81  
P.O. Box 637 | Moundridge, KS | 67107 U.S.A.  
T: 620-345-8621 | [GrasshopperMower.com](http://GrasshopperMower.com)



Litho in U.S.A. Form 0422-170538 © 2022 The Grasshopper Company  
For a complete list of trademarks/registered trademarks, visit [grasshoppermower.com/legal](http://grasshoppermower.com/legal).

⚠ **WARNING:** California Proposition 65 Cancer and Reproductive Harm – [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)