



Images are not representative of model.

Specification Guide

FTS 150-260 4X4 FTS 150-260 4X4 CREW

Weight Ratings

GVM	15,000 kg
GCM	21,000 kg

Engine

Power	191 kW @ 2,070 rpm
Torque	883 Nm @ 1,000 - 2,070 rpm

Transmissions

6 speed automatic transmission (AT)

Wheelbase

4,250 mm

Key Features

- ADR 80/04 (Euro VI) Compliant
- Advanced Emergency Braking (AEB)
- Bi-LED Headlamps with Daytime Running Lamps
- ECE-R29 cab with side anti-intrusion beams
- Electronic Stability Control (ESC)
- Isri 6860/875 NTS2 Air Suspension Driver's Seat
- Lane Departure Warning (LDW)

ISUZU
CARE

3YR
FACTORY WARRANTY

3YR
24/7 ROADSIDE ASSIST



View and download

Scan to search,
view and download
full spec sheets for
all Isuzu truck models.


Driveline

Engine

Description	Isuzu DB6A-TCN
Type	6 Cylinder
Power	191 kW (260 PS) @ 2,070 rpm
Torque	883 Nm @ 1,000-2,070 rpm
Displacement	6,690 cc
Compression Ratio	TBC
Bore x Stroke	107 mm x 124 mm
Induction	Electronically controlled variable geometry turbocharger with air-to air intercooler
Fuel Injection	Direct injection high pressure common rail system
Emission Standard	ADR 80/04 (Euro VI) compliant.
Emission Control	SCR (Selective Catalytic Reduction) DPD (Diesel Particulate Diffuser)
Auxiliary Brake	Engine Compression Brake (I-Brake)

Transmission

AT	Description: Allison LCT2500 GEN 6						
	Type: Auto Transmission						
	Ratios:						
	1	2	3	4	5	6	REV
	3.51	1.90	1.44	1.00	0.74	0.64	5.09
Power Take Off Facility: LHS and RHS PTO openings on transmission case. Torque convertor turbine driven PTO drive gear							
Transfer Gearbox	Description: Isuzu TF56 Type: Full time 4WD with lockable centre differential Ratio: TBC						

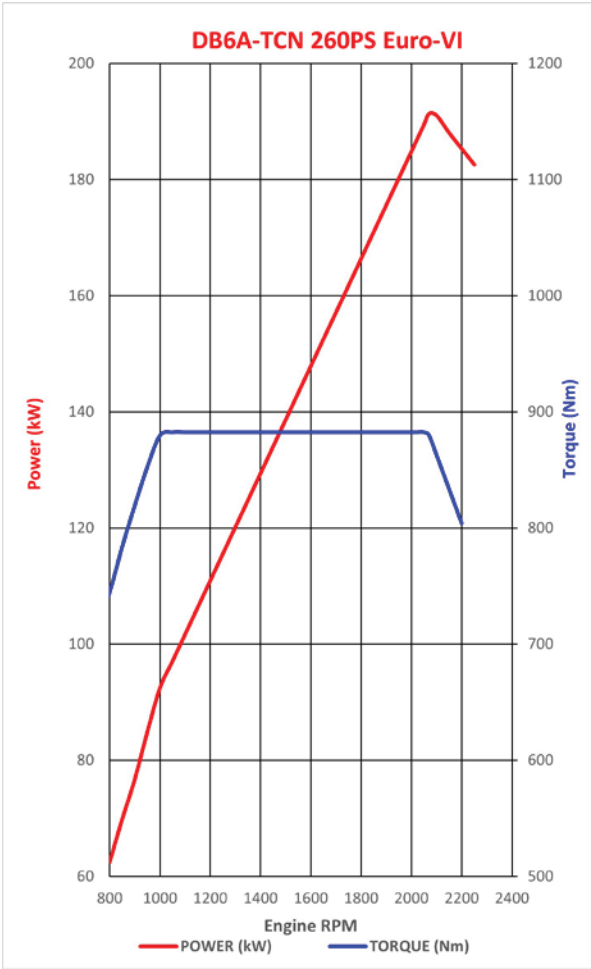

Performance (calculated - typical paved road)

		Geared Speed* (top gear at peak power engine rpm)	Low Speed Gradeability (lowest forward gear assuming no wheel slip)	Engine Speed (top gear at 100 km/h)
FTS 150-260	At 15,000 kg GVM	97 km/h @ 2,070 rpm	22%	2,129 rpm

Technology & Equipment


Intelligent Safety

Active	Advanced Emergency Braking; vehicle, pedestrian and bicycle
	Anti Lock Braking System
	Attention Alert System
	Automatic Lighting System (Front and Rear)
	Distance Warning System
	Electronic Stability Control
	Forward Collision Warning
	Lane Departure Warning System
	Traffic Movement Warning
Passive	Driver and front left hand passenger seatbelt pretensioners
	Driver and front passenger airbags
	ECE-R29 cab with side anti-intrusion beams
	Overhead compartments, Twin cup holders, Centre console box & storage tray, Front door pockets

Available Accessories

Lights	Driving Lights	•
	Beacon lights	•
Protection	Isuzu Genuine Bull bar	•
	Seat Covers	•
	Isuzu Floor Mats	•
	Isuzu Dash Mats	•
	Isuzu Weather shields	•
Technology	Isuzu Mudflaps	•
	Isuzu Camera	•
Aerodynamics	Isuzu Tyre Pressure Monitoring	•
	Air Deflectors	•
Display TSafetyext Here	Warning Triangles	•
	Wheel Nut Indicators	•
	Signage	•

• Fitted as Standard • Option to Fit

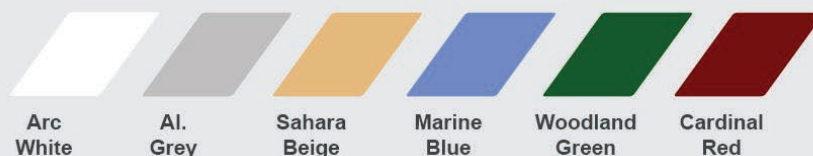

Colours shown are indicative only. Availability on request only for limited models. Check with your local dealer.

Chassis

Steering

Type	Power assisted recirculating ball
Turns Lock To Lock	3.50
Lock Angle Inside	34 °
Lock Angle Outside	29 °

Suspension

Front	Type: Single stage steel multi-leaf springs
	Other Features: Double acting hydraulic shock absorbers.
Rear	Type: Multi-leaf main spring, multi leaf helper spring

Fuel Tank

Diesel Tank	Type	Frame mounted tank
	Capacity	200 L
	Material	Steel
	Features	Lockable Cap
AdBlue® Tank	Type	Frame mounted tank
	Capacity	65 L
	Material	High-Density Polyethylene

Electrical Systems

Type	24 Volts
Alternator	90 Amps
Starter Motor	5.00 kW
Battery	2 x 80D26L (600 CCA) (CREW)
	2 x 115E41L (651 CCA) (REST)
Canbus Provision	FMS

Chassis Frame

Type	Rivetless bolted ladder frame
Material	HT540A steel side members
Dimension	Side Rail (mm): 275 x 85 x 10 Rear frame width (mm): 870.00

Axle

Front	Description	Isuzu FD055
	Type	Single drive with Birfield outer joints
	Capacity	5,500 kg
Rear	Description	Isuzu R100
	Type	Single drive with 'No Spin' differential lock system
	Capacity	10,000 kg
	Ratio	6.500

Wheels & Tyres

Front	Wheels	22.5 x 7.5 eight stud steel wheels
	Tyres	11R22.5
	Steer Axle Rating	6,300 kg
Rear	Wheels	22.5 x 7.5 eight stud steel wheels
	Tyres	11R22.5
	Drive Axle Rating	11,600 kg

Brakes

Model		Air Over Hydraulic drum brakes with Electronic Braking System (EBS)
Type		
Front Drum Diameter (mm)	410	
Rear Drum Diameter (mm)	410	
Front Lining Width (mm)	115	
Rear Lining Width (mm)	140	
Park Brake	Spring park brake acting on all rear wheels	


Weights & Dimensions

Weights (kg)

Models	Ratings ³		Loading Limit ³ (at ground)		Cab Chassis Weight ⁴			Order Code
	GVM	GCM	Front	Rear	Front	Rear	Total	
FTS 150-260 AT C43	15,000	21,000	5,500	10,000	TBC	TBC	TBC	FS-FTSNN-LAS
FTS 150-260 AT R43	15,000	21,000	5,500	10,000	TBC	TBC	TBC	FS-FTSMN-LAS

Dimensions (mm)

Models	WB	OAL	FOH	ROH	EA	RT	ORT	CH	FFA (Unladen)	RFA (Unladen)	RFH (Unladen)	Turning Circle Kerb To Kerb
FTS 150-260 AT C43	4,250	TBC	TBC	TBC	TBC	TBC	TBC	TBC	TBC	TBC	TBC	TBC
FTS 150-260 AT R43	4,250	TBC	TBC	TBC	TBC	TBC	TBC	TBC	TBC	TBC	TBC	TBC

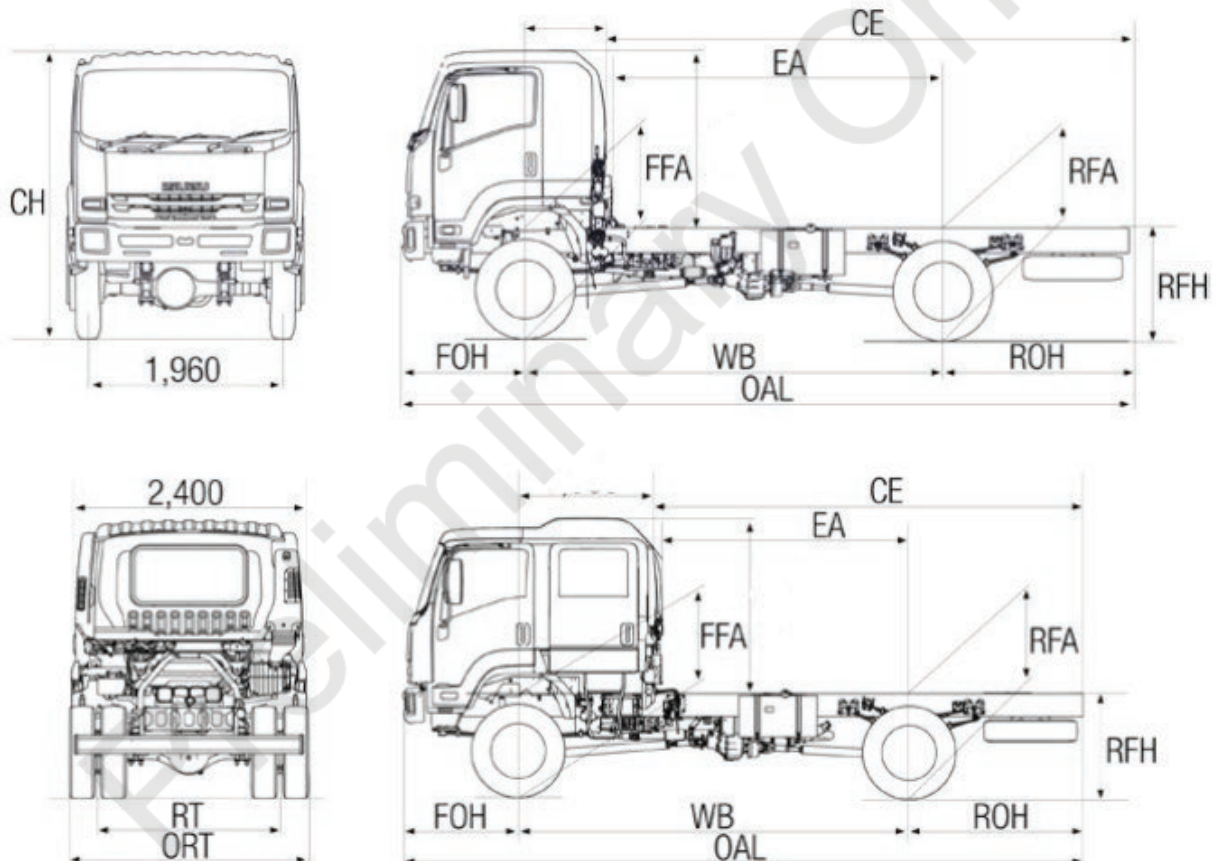

Cabin Features

General Features

Audible Warning	Reverse alarm
	Electro-hydraulic cab tilt to 45° (CREW)
Engine Access	Manual cab tilt to 45° with torsion bar assistance
	BI-LED Headlamps with Adaptive Driving Beam (ADB) and Daytime Running Lamps (DRL)
Exterior Lighting	Front LED foglamps
	LED Roof mounted clearance lamps
	LED tail lamps
Front Bumper	3-piece resin, body coloured
Mirrors	Heated & powered exterior main mirrors with flat glass and adjustable convex "spot" mirrors
Security	Passive Entry and Start System (PESS) with remote central locking and immobiliser (Excl Crew)
Steps	Heavy duty anti slip steps
Wipers	Auto windshield wet wiper system

Driver Control

	Cruise control
Engine	DPD manual regeneration switch
	Idle speed control
General Controls	Auto windshield wet wiper system, washers, engine brake and turn signals
Safety Systems	On/Off and Adjustable safety systems (for more details see owner's manual)
	ADAS controls
Steering Wheel Controls	Multi Information Display controls
	Multimedia controls (inc. phone)



Cabin Interior

Air Conditioning	Auto control
Entry Assist Grips	Door and roof pillar mounted
Interior Lighting	LED door open lamp. Bright LED room lamp
	ISRI 6860/875 NTS2 air suspension driver's seat with heating and ventilation
Occupancy	LH passenger bucket seat, plus centre seat with folding seat back and storage compartment
	Rear bench seat with 4 seat capacity (CREW)
	Rear space: ADR42 Compliant sleeper
Power Outlet	24V
Seatbelts	lap sash seatbelts in all outboard seating positions (Integrated driver). Centre seat lap belts.
Steering Column	Tilt/telescopic adjustable
Storage	Overhead cabinet, 2 cup holders, door pockets

MyISUZU Co-Pilot Audio Visual Unit

Internal Storage Capacity	32GB
Navigation	Truck tailored GPS based system + Live traffic and map content updates via smartphone link (live feed updates are provided for 3 years)
Operating System	Android Automotive
Radio	AM / FM / DAB+
Screen Type	10.1" High Definition with capacitive touch
	Android Auto/Apple CarPlay compatible (wired)
Smartphone Integration	Phone storage pocket
	USB socket
	Wi-Fi connectivity

Instrumentation

General Instrumentation	Digital odometer with integrated dual tripmeters
	Engine temperature and fuel/AdBlue® level
	Speedometer and tachometer
	Adjustable vehicle speed warning
Multi Information Display	AEB, FCW, DWS, LDW, TMW systems activation alerts
	Auto windshield wiper system mode
	CTW indicator
	Hourmeter

Service & Support

ISUZU
CARE

3YR
FACTORY WARRANTY

3YR
24/7 ROADSIDE ASSIST



Service Agreements	Isuzu Essentials	Isuzu Essentials Plus	Isuzu Total
	Available on new trucks only and paid upfront - up to 72 months or the first 6 scheduled services	Available on new trucks and trucks currently in use - up to 72 months old	For new trucks only, Isuzu Total is our most comprehensive service package
Check and Report Fault Codes	•	•	•
Wheel Bearing Re-pack & Lubricating All Joints	•	•	•
Globes – Stop, Tail, Number Plate, Indicator, Headlight, Interior		•	•
Fan Belts & Coolant Hoses		•	•
Wiper Blades, Relays & Fuses		•	•
Engine, Transmission & Electrical Components			•
Brake & Suspension Components			•
Washer Fluids & Consumables	•	•	•
Labour	•	•	•

Dealer Network

Service & Support	National Isuzu Truck Dealer Network
	Find dealer online



Warranty⁵

Chassis	3 Year Standard Warranty 200,000 km / no hours stipulation
Genuine Parts & Accessories	3 Years Standard Warranty (When installed by an Isuzu Trucks Approved Dealership - Including Labor)
Service Intervals	12 months or 25,000 km or 400 hours, whichever comes first

Roadside Assist

Roadside Assist	3 Year Roadside Support 24/7 Unlimited Km
-----------------	--

* Maximum speed achievable depends on vehicle frontal area as well as other factors. Consult your Isuzu dealer for more detailed information.

² As shown on fuel tank. Volume of fuel that can be added to a near-empty tank will vary according to operating conditions.

³ Vehicle ratings and axle weight limits are subject to government regulatory requirements and weight distribution analysis. Consult your Isuzu dealer to select the correct vehicle for your specific application.

⁴ Cab chassis only as supplied and including 10 litres of fuel.

⁵ Subject to the conditions outlined in the IAL New Vehicle Warranty. All Isuzu warranties are subject to mandatory prescribed terms under Australian Consumer Law including consumer guarantees. For further information please visit isuzu.com.au or contact your local dealer.

ISUZU AUSTRALIA LIMITED ABN 97 006 962 572 ("IAL"). The information in this spec sheet was correct at time of printing, but all measurements, specifications and equipment are subject to change without notice. Some equipment may have been changed and/or is available at extra cost.

IAL may make changes at any time without notice, in prices, colours, materials, equipment and models. IAL makes all reasonable attempts to ensure the availability of all vehicles and equipment. The information in this spec sheet is general in nature. Your Isuzu dealer can confirm all measurements, specifications and vehicle / equipment availability upon request. To the extent permitted by the law, IAL is not liable to any person as result of reliance on the content of this spec sheet.

Our National Customer Care Centre provides you access to a team of specialists with years of training. A conversation with an Isuzu specialist is as easy as contacting the team on 1800 035 640 or customercare@isuzu.net.au.

Isuzu Australia Limited

www.isuzu.com.au