



## Specification Guide

# FRR 110-240 (DAY) FRR 110-240 CREW

### Weight Ratings

|                  |                       |
|------------------|-----------------------|
| GVM              | 11,000 kg             |
| GCM <sup>1</sup> | 15,500 kg / 18,500 kg |

### Engine

|        |                    |
|--------|--------------------|
| Power  | 177 kW @ 2,400 rpm |
| Torque | 765 Nm @ 1,600 rpm |

### Wheelbase

|          |
|----------|
| 3,790 mm |
| 4,060 mm |
| 4,660 mm |
| 4,990 mm |
| 5,160 mm |
| 5,320 mm |

### Transmissions

|                                            |
|--------------------------------------------|
| 6-speed Manual Transmission (MT)           |
| 6-speed Automated Manual Transmission (AM) |

### Key Features

- Adaptive Driving Beam (ADB)
- ADR 80/04 (pPNLT) Compliant
- Advanced Emergency Braking (AEB)
- Bi-LED Headlamps with Daytime Running Lamps (DRL)
- ECE-R29 cab with side anti-intrusion beams
- Electronic Stability Control (ESC)
- Full speed Adaptive Cruise Control (FACC) (AM models only)
- Hill Start Aid (HSA)
- ISRI 6860/875 NTS2 Air Suspension Driver's Seat
- Lane Departure Warning (LDW)



Scan QR code to search,  
view and download full  
spec sheets for all Isuzu  
truck models.



# Driveline


## Engine

|                   |                                                                                                                                                |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Description       | Isuzu 4HK1-TCH                                                                                                                                 |
| Type              | 4 Cylinder                                                                                                                                     |
| Power             | 177 kW @ 2,400 rpm                                                                                                                             |
| Torque            | 765 Nm @ 1,600 rpm                                                                                                                             |
| Displacement      | 5,193 cc                                                                                                                                       |
| Compression Ratio | 16.50:1                                                                                                                                        |
| Bore x Stroke     | 115 mm x 125 mm                                                                                                                                |
| Induction         | Low pressure turbocharger and high pressure Variable Geometry System (VGS) turbocharger sequentially operated and with air-to air intercooler. |
| Fuel Injection    | Direct injection high pressure common rail system.                                                                                             |
| Emission Standard | ADR80/04 (pPNLT)                                                                                                                               |
| Emission Control  | SCR (Selective Catalytic Reduction)<br>DPD (Diesel Particulate Diffuser)<br>EGR (Exhaust Gas Recirculation)                                    |
| Auxiliary Brake   | Air controlled exhaust brake                                                                                                                   |

## Transmission

|                                                                                                   |                                     |      |      |      |      |      |      |  |
|---------------------------------------------------------------------------------------------------|-------------------------------------|------|------|------|------|------|------|--|
| MT                                                                                                | Description: ISUZU MZW-6P           |      |      |      |      |      |      |  |
|                                                                                                   | Type: Manual Transmission           |      |      |      |      |      |      |  |
|                                                                                                   | Ratios:                             |      |      |      |      |      |      |  |
|                                                                                                   | 1                                   | 2    | 3    | 4    | 5    | 6    | REV  |  |
|                                                                                                   | 6.61                                | 4.09 | 2.35 | 1.53 | 1.00 | 0.72 | 6.61 |  |
| Power Take Off Facility: PTO provision on LHS of transmission case                                |                                     |      |      |      |      |      |      |  |
| AM                                                                                                | Description: ISUZU MZW-6P           |      |      |      |      |      |      |  |
|                                                                                                   | Type: Automated Manual Transmission |      |      |      |      |      |      |  |
|                                                                                                   | Ratios:                             |      |      |      |      |      |      |  |
|                                                                                                   | 1                                   | 2    | 3    | 4    | 5    | 6    | REV  |  |
|                                                                                                   | 6.61                                | 4.09 | 2.35 | 1.53 | 1.00 | 0.72 | 6.61 |  |
| Power Take Off Facility: PTO provision on LHS of transmission case. PTO drive from mainshaft gear |                                     |      |      |      |      |      |      |  |

## 4HK1-TCH 240PS pPNLT

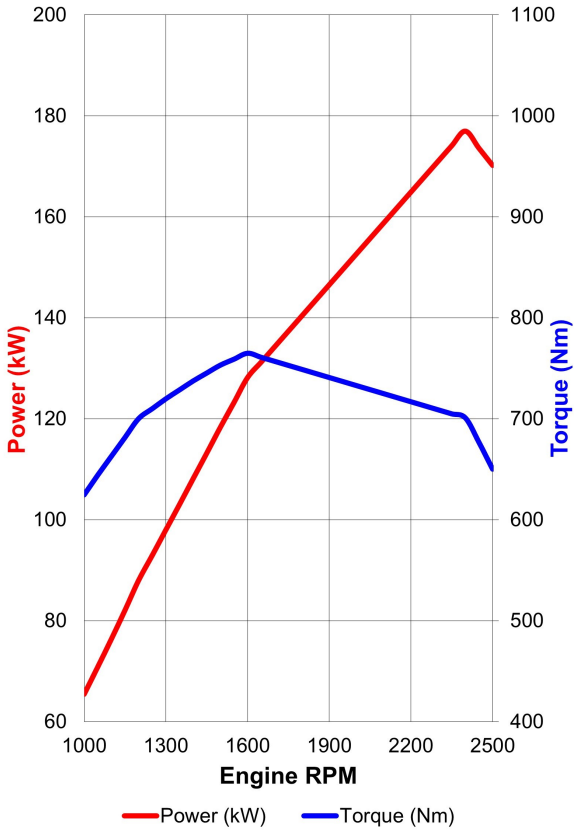

## Clutch

|    |                                                        |
|----|--------------------------------------------------------|
| MT | Type: Single plate with air assisted hydraulic control |
|    | Clutch Plate Diameter: 381 mm                          |

## Performance<sup>2</sup> (calculated - typical paved road)

|                   |                  | Geared Speed (top gear at peak power engine rpm) | Low Speed Gradeability (lowest forward gear assuming no wheel slip) | Engine Speed (top gear at 100 km/h) |
|-------------------|------------------|--------------------------------------------------|---------------------------------------------------------------------|-------------------------------------|
| FRR 110-240       | At 11,000 kg GVM | 107 km/h @ 2,400 rpm                             | 49%                                                                 | 2,253 rpm                           |
| FRR 110-240 REPTO | At 11,000 kg GVM | 100 km/h @ 2,400 rpm                             | 53%                                                                 | 2,411 rpm                           |

# Technology & Equipment

## Intelligent Safety


|                                                                            |                                                                                                |
|----------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
| <b>ACTIVE SAFETY<br/>Advanced Driver<br/>Assistance<br/>Systems (ADAS)</b> | Adaptive Driving Beam (ADB)                                                                    |
|                                                                            | Advanced Emergency Braking (AEB)                                                               |
|                                                                            | Anti Skid Regulator (Traction Control) (ASR)                                                   |
|                                                                            | Anti-lock Braking System (ABS)                                                                 |
|                                                                            | Attention Alert System (AAS)                                                                   |
|                                                                            | Automatic Lighting System (Front and Rear) (ALS)                                               |
|                                                                            | Distance Warning System (DWS)                                                                  |
|                                                                            | Electronic Stability Control (ESC)                                                             |
|                                                                            | Forward Collision Warning (FCW)                                                                |
|                                                                            | Front Cross Traffic Alert (FCTA)                                                               |
|                                                                            | Full speed Adaptive Cruise Control (AM models only) (FACC)                                     |
|                                                                            | Intelligent Speed Limiter (ISL)                                                                |
|                                                                            | Intersection Warning System (IWS)                                                              |
|                                                                            | Lane Departure Warning (LDW)                                                                   |
|                                                                            | Traffic Movement Warning (TMW)                                                                 |
|                                                                            | Traffic Sign Recognition (TSR)                                                                 |
| <b>PASSIVE SAFETY<br/>Cabin Occupant<br/>Safety Systems<br/>(COSS)</b>     | ECE-R29 cab with side anti-intrusion beams                                                     |
|                                                                            | Overhead compartments, Twin cup holders, Centre console box & storage tray, Front door pockets |
|                                                                            | SRS Driver and front outboard passenger airbags                                                |
|                                                                            | SRS Driver and front outboard passenger seatbelt pretensioners                                 |

## Accessories<sup>3</sup>

|                       |                                |   |
|-----------------------|--------------------------------|---|
| <b>Lights</b>         | Driving Lights                 | • |
|                       | Beacons                        | • |
| <b>Protection</b>     | Isuzu Genuine Bull Bar         | • |
|                       | Isuzu Seat Covers              | • |
|                       | Isuzu Floor Mats               | • |
|                       | Isuzu Dash Mats                | • |
|                       | Isuzu Weathershields           | • |
|                       | Isuzu Mudflaps                 | • |
| <b>Technology</b>     | Isuzu Cameras                  | • |
|                       | Isuzu Tyre Pressure Monitoring | • |
|                       | Alarms                         | • |
| <b>Communications</b> | Two-Way Radios                 | • |
| <b>Aerodynamics</b>   | Air Deflectors                 | • |
|                       | Warning Triangles              | • |
| <b>Safety</b>         | Wheel Nut Indicators           | • |
|                       | Signage                        | • |

• Fitted as Standard    • Option to Fit

# Australia's no.1 truck, made more you.

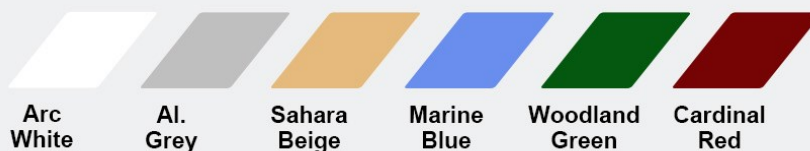

Colours shown are indicative only, additional costs may apply. Availability on request only for limited models. Check with your local dealer.

# Chassis

## Steering

|                  |                                          |
|------------------|------------------------------------------|
| Type             | Power assisted recirculating ball        |
| Wheel Lock Angle | 52° (inside wheel) / 39° (outside wheel) |

## Suspension

|       |                |                                                                                      |
|-------|----------------|--------------------------------------------------------------------------------------|
| Front | Type           | Single stage steel multi-leaf springs.<br>Single stage steel taper leaf spring (D38) |
|       | Other Features | Double acting hydraulic shock absorbers with stabiliser bar.                         |
| Rear  | Description    | Isuzu                                                                                |
|       | Type           | Two stage, multi-leaf main and helper spring                                         |

## Fuel and AdBlue® Tanks

|              |                           |                           |
|--------------|---------------------------|---------------------------|
| Diesel Tank  | Type                      | Frame mounted tank        |
|              | Capacity <sup>4</sup> (L) | 200                       |
|              | Material                  | Steel                     |
|              | Features                  | Lockable Cap              |
| AdBlue® Tank | Type                      | Frame mounted tank        |
|              | Capacity <sup>4</sup> (L) | 16<br>28                  |
|              | Material                  | High-Density Polyethylene |
|              |                           |                           |

## Electrical Systems

|                    |                                                     |
|--------------------|-----------------------------------------------------|
| Voltage (V)        | 24                                                  |
| Alternator (A)     | 90                                                  |
| Starter Motor (kW) | 5                                                   |
| Battery            | 2 x 115E41L (651 CCA) batteries connected in series |
| CAN bus Provision  | FMS Provision                                       |

## Chassis Frame

|           |                                                            |
|-----------|------------------------------------------------------------|
| Type      | Cold rivetted ladder frame                                 |
| Material  | HT620 steel side members                                   |
| Dimension | Side Rail (mm): 234 x 70 x 7<br>Rear frame width (mm): 840 |

## Axle

|       |             |                       |
|-------|-------------|-----------------------|
| Front | Description | Isuzu F041            |
|       | Type        | Reverse Elliot I-beam |
|       | Capacity    | 4,100 kg              |
| Rear  | Description | Isuzu R077            |
|       | Type        | Single drive          |
|       | Capacity    | 7,700 kg              |
|       | Ratio       | 4.555<br>4.875 (D38)  |

## Wheels & Tyres

|       |                        |                                         |
|-------|------------------------|-----------------------------------------|
| Front | Wheels                 | JIS 6 Stud 17.5 x 6.75 steel wheels     |
|       | Tyres                  | 235/75R17.5 132/130M Michelin X Multi Z |
|       | Front Axle Tyre Rating | 4,000 kg                                |
| Rear  | Wheels                 | JIS 6 Stud 17.5 x 6.75 steel wheels     |
|       | Tyres                  | 235/75R17.5 132/130M Michelin X Multi Z |
|       | Rear Axle Tyre Rating  | 7,600 kg                                |

## Brakes

|                  |                                                                                                                                  |
|------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Type             | Air Over Hydraulic drumbrakes with ElectronicBraking System (EBS)<br><br>Full Air drum brakes withElectronic BrakingSystem (EBS) |
| Front Diameter   | 320 mm                                                                                                                           |
| Rear Diameter    | 320 mm                                                                                                                           |
| Front Drum Width | 120 mm                                                                                                                           |
| Rear Drum Width  | 145 mm                                                                                                                           |
| Park Brake       | Spring park brake acting on all rear wheels                                                                                      |


# Weights & Dimensions

## Weights (kg)

| Models                   | Ratings <sup>5</sup> |        | Loading Limit <sup>5</sup> (at ground) |       | Cab Chassis Weight <sup>6</sup> |       |       | Order Code    |
|--------------------------|----------------------|--------|----------------------------------------|-------|---------------------------------|-------|-------|---------------|
|                          | GVM                  | GCM    | Front                                  | Rear  | Front                           | Rear  | Total |               |
| FRR 110-240 AM D41       | 11,000               | 18,500 | 4,000                                  | 7,600 | 2,271                           | 1,246 | 3,517 | FS-FRRJL-KAS  |
| FRR 110-240 AM D47       | 11,000               | 18,500 | 4,000                                  | 7,600 | 2,295                           | 1,256 | 3,551 | FS-FRRJL-MAS  |
| FRR 110-240 AM D50       | 11,000               | 18,500 | 4,000                                  | 7,600 | 2,323                           | 1,268 | 3,591 | FS-FRRJL-NAS  |
| FRR 110-240 AM D53       | 11,000               | 18,500 | 4,000                                  | 7,600 | 2,341                           | 1,259 | 3,600 | FS-FRRJL-QAS  |
| FRR 110-240 AM C52       | 11,000               | 15,500 | 4,000                                  | 7,600 | 2,374                           | 1,287 | 3,661 | FS-FRRL-LPAS  |
| FRR 110-240 MT D38 REPTO | 11,000               | 15,500 | 4,000                                  | 7,600 | 2,297                           | 1,186 | 3,483 | FS-FRRJK-JAS  |
| FRR 110-240 MT D41       | 11,000               | 15,500 | 4,000                                  | 7,600 | 2,246                           | 1,190 | 3,436 | FS-FRRJJ-KAS  |
| FRR 110-240 MT D47       | 11,000               | 15,500 | 4,000                                  | 7,600 | 2,283                           | 1,230 | 3,513 | FS-FRRJJ-MAS  |
| FRR 110-240 MT D50       | 11,000               | 15,500 | 4,000                                  | 7,600 | 2,289                           | 1,268 | 3,557 | FS-FRRJJ-NAS  |
| FRR 110-240 MT D53       | 11,000               | 15,500 | 4,000                                  | 7,600 | 2,301                           | 1,203 | 3,504 | FS-FRRJJ-QAS  |
| FRR 110-240 MT C52       | 11,000               | 15,500 | 4,000                                  | 7,600 | 2,563                           | 1,324 | 3,887 | FS-FRRLJ-LPAS |

## Dimensions<sup>7</sup> (mm)

| Models                   | WB    | OAL   | FOH   | ROH   | CA    | RT    | ORT   | CH    | FFH<br>(Unladen) | RFH<br>(Unladen) | EFH<br>(Unladen) | Turning<br>Circle <sup>8</sup> (m)<br>Kerb To Kerb |
|--------------------------|-------|-------|-------|-------|-------|-------|-------|-------|------------------|------------------|------------------|----------------------------------------------------|
| FRR 110-240 AM D41       | 4,060 | 6,970 | 1,165 | 1,745 | 3,504 | 1,660 | 2,170 | 2,570 | 770              | 897              | 952              | 13.8                                               |
| FRR 110-240 AM D47       | 4,660 | 7,870 | 1,165 | 2,045 | 4,104 | 1,660 | 2,170 | 2,570 | 769              | 895              | 951              | 15.6                                               |
| FRR 110-240 AM D50       | 4,990 | 8,320 | 1,165 | 2,165 | 4,434 | 1,660 | 2,170 | 2,570 | 768              | 896              | 952              | 16.6                                               |
| FRR 110-240 AM D53       | 5,320 | 8,620 | 1,165 | 2,135 | 4,764 | 1,660 | 2,170 | 2,569 | 767              | 894              | 944              | 17.6                                               |
| FRR 110-240 AM C52       | 5,160 | 8,600 | 1,165 | 2,275 | 3,573 | 1,705 | 2,260 | 2,667 | 766              | 887              | 940              | 17.1                                               |
| FRR 110-240 MT D38 REPTO | 3,790 | 6,550 | 1,165 | 1,595 | 3,234 | 1,660 | 2,170 | 2,573 | 770              | 898              | 952              | 13                                                 |
| FRR 110-240 MT D41       | 4,060 | 6,970 | 1,165 | 1,745 | 3,504 | 1,660 | 2,170 | 2,572 | 770              | 897              | 951              | 13.8                                               |
| FRR 110-240 MT D47       | 4,660 | 7,870 | 1,165 | 2,045 | 4,104 | 1,660 | 2,170 | 2,569 | 769              | 896              | 952              | 15.6                                               |
| FRR 110-240 MT D50       | 4,990 | 8,320 | 1,165 | 2,165 | 4,434 | 1,660 | 2,170 | 2,570 | 769              | 895              | 950              | 16.6                                               |
| FRR 110-240 MT D53       | 5,320 | 8,620 | 1,165 | 2,135 | 4,764 | 1,660 | 2,170 | 2,570 | 769              | 894              | 947              | 17.6                                               |
| FRR 110-240 MT C52       | 5,160 | 8,600 | 1,165 | 2,275 | 3,573 | 1,705 | 2,260 | 2,667 | 760              | 890              | 948              | 17.1                                               |

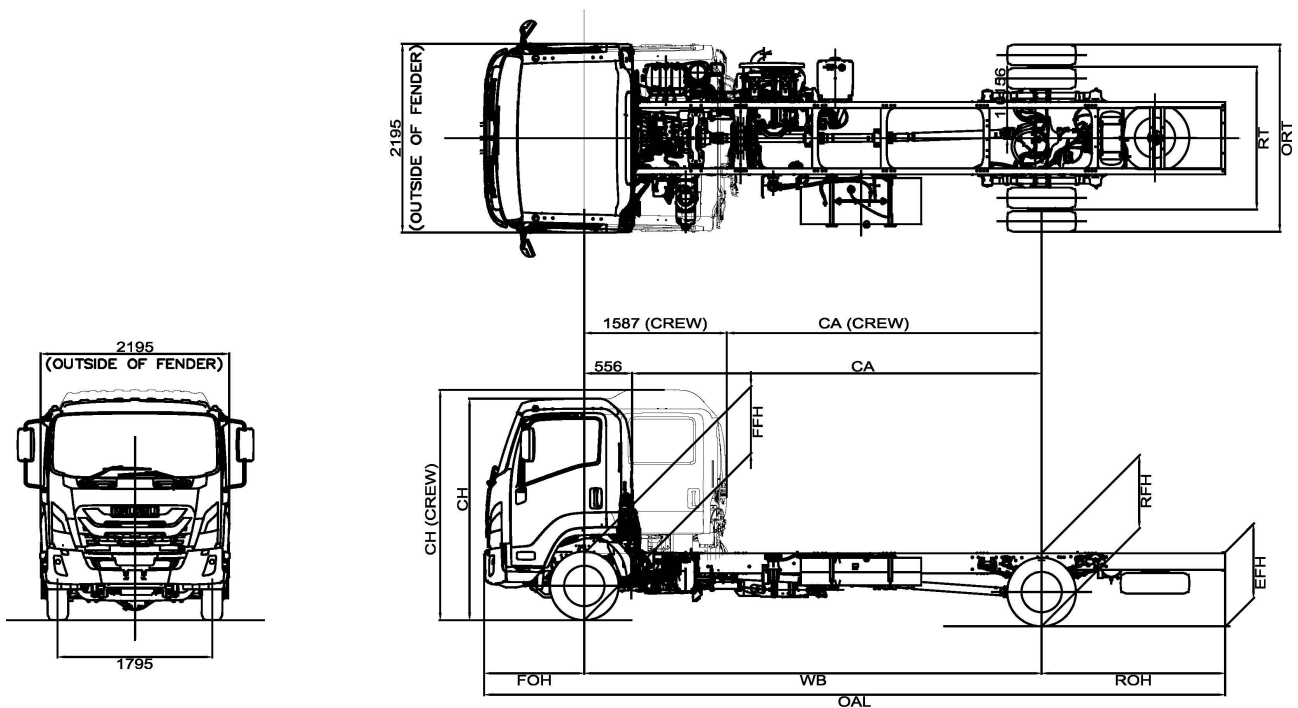


# Cabin Features

## General Features

|                          |                                                                                             |
|--------------------------|---------------------------------------------------------------------------------------------|
| <b>AUDIBLE WARNING</b>   | Reverse alarm                                                                               |
| <b>ENGINE ACCESS</b>     | Electro-hydraulic cab tilt to 33.5° (CREW)                                                  |
|                          | Manual cab tilt to 42° with torsion bar assistance                                          |
| <b>EXTERIOR LIGHTING</b> | BI-LED Headlamps with Adaptive Driving Beam (ADB) and Daytime Running Lamps (DRL)           |
|                          | LED front foglamps                                                                          |
|                          | LED Tail lamps                                                                              |
|                          | Roof mounted clearance lamps                                                                |
| <b>FRONT BUMPER</b>      | 3-piece resin, body coloured                                                                |
| <b>MIRRORS</b>           | Heated & powered exterior main mirrors with flat glass and adjustable convex "spot" mirrors |
| <b>SECURITY</b>          | Passive Entry and Start System (PESS) with remote central locking and immobiliser           |
|                          | Remote central locking and immobiliser (CREW)                                               |
| <b>STEPS</b>             | Heavy duty anti slip steps                                                                  |
| <b>WIPERS</b>            | Automatic windshield wet Wiper System (AWS)                                                 |

## Driver Control

|                                |                                                                            |
|--------------------------------|----------------------------------------------------------------------------|
| <b>ENGINE</b>                  | Cruise control                                                             |
|                                | DPD manual regeneration switch                                             |
|                                | Idle speed control                                                         |
| <b>GENERAL CONTROLS</b>        | Auto windshield wet wiper system, washers, engine brake and turn signals   |
| <b>SAFETY SYSTEMS</b>          | On/Off and Adjustable safety systems (for more details see owner's manual) |
|                                | ADAS controls                                                              |
| <b>STEERING WHEEL CONTROLS</b> | Multi Information Display controls                                         |
|                                | Multimedia controls (inc. phone)                                           |
| <b>TRANSMISSION (AM ONLY)</b>  | Gear selection control with R-N-D and sequential shift positions           |

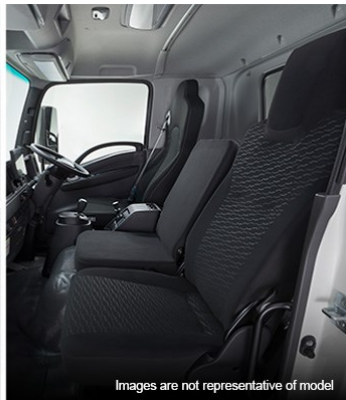

Images are not representative of model

## Cabin Interior

|                           |                                                                                                  |
|---------------------------|--------------------------------------------------------------------------------------------------|
| <b>AIR CONDITIONING</b>   | Automatic climate control                                                                        |
| <b>ENTRY ASSIST GRIPS</b> | Door and roof pillar mounted                                                                     |
| <b>INTERIOR LIGHTING</b>  | LED door open lamp, Bright LED room lamp                                                         |
| <b>OCCUPANCY</b>          | ISRI 6860/875 NTS2 air suspension driver's seat with heating and ventilation                     |
|                           | LH passenger bucket seat, plus centre seat with folding seat back and storage compartment        |
|                           | Rear bench seat with 4 seat capacity (Crew)                                                      |
|                           | Rear space: N/A (DAY cab)                                                                        |
| <b>POWER OUTLET</b>       | 24V                                                                                              |
| <b>SEATBELTS</b>          | lap sash seatbelts in all outboard seating positions (Integrated driver). Centre seat lap belts. |
|                           | lap sash seatbelts in all outboard seating positions. Centre seat lap belts.                     |
| <b>STEERING COLUMN</b>    | Tilt/telescopic adjustable                                                                       |
| <b>STORAGE</b>            | Overhead cabinet, 2 cup holders, door pockets                                                    |

## MyISUZU Co-Pilot Audio Visual Unit

|                                  |                                                                                                                                         |
|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| <b>INTERNAL STORAGE CAPACITY</b> | 32GB                                                                                                                                    |
| <b>NAVIGATION</b>                | Truck tailored GPS based system + Live traffic and map content updates via smartphone link (live feed updates are provided for 3 years) |
| <b>OPERATING SYSTEM</b>          | Android Automotive                                                                                                                      |
| <b>RADIO</b>                     | AM / FM / DAB+                                                                                                                          |
| <b>SCREEN TYPE</b>               | 10.1" High Definition with capacitive touch                                                                                             |
|                                  | Android Auto/Apple CarPlay compatible (wired)                                                                                           |
| <b>SMARTPHONE INTEGRATION</b>    | Phone storage pocket                                                                                                                    |
|                                  | USB socket                                                                                                                              |
|                                  | Wi-Fi connectivity                                                                                                                      |

## Instrumentation

|                                  |                                                         |
|----------------------------------|---------------------------------------------------------|
| <b>GENERAL INSTRUMENTATION</b>   | Digital odometer with integrated dual tripmeters        |
|                                  | Engine temperature and fuel/AdBlue® level               |
|                                  | Speedometer and tachometer                              |
| <b>MULTI INFORMATION DISPLAY</b> | Adjustable vehicle speed warning                        |
|                                  | AEB, FCW, DWS, LDW, FACC, TMW systems activation alerts |
|                                  | Auto windshield wiper system mode                       |
|                                  | CTW indicator                                           |
|                                  | Hourmeter                                               |

# Service & Support



## ISUZU CARE



### Service Agreements

### Isuzu Essentials

### Isuzu Essentials Plus

### Isuzu Total

|                                                                   | Available on new trucks only and paid upfront - up to 72 months or the first 6 scheduled services | Available on new trucks and trucks currently in use - up to 72 months old | For new trucks only, Isuzu Total is our most comprehensive service package |
|-------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|----------------------------------------------------------------------------|
| Check and Report Fault Codes                                      | •                                                                                                 | •                                                                         | •                                                                          |
| Wheel Bearing Re-pack & Lubricating All Joints                    | •                                                                                                 | •                                                                         | •                                                                          |
| Globes – Stop, Tail, Number Plate, Indicator, Headlight, Interior |                                                                                                   | •                                                                         | •                                                                          |
| Fan Belts & Coolant Hoses                                         |                                                                                                   | •                                                                         | •                                                                          |
| Wiper Blades, Relays & Fuses                                      |                                                                                                   | •                                                                         | •                                                                          |
| Engine, Transmission & Electrical Components                      |                                                                                                   |                                                                           | •                                                                          |
| Brake & Suspension Components                                     |                                                                                                   |                                                                           | •                                                                          |
| Washer Fluids & Consumables                                       | •                                                                                                 | •                                                                         | •                                                                          |
| Labour                                                            | •                                                                                                 | •                                                                         | •                                                                          |

### Dealer Network

|                   |                                     |
|-------------------|-------------------------------------|
| Service & Support | National Isuzu Truck Dealer Network |
|                   | Find dealer online                  |



### Warranty<sup>9</sup>

|                                                 |                                                                                                     |
|-------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| Chassis                                         | 6 Year Standard Warranty<br>300,000 km / Unlimited Hours                                            |
| Harsh Application Warranty Agitator / Compactor | 3 Years<br>200,000 km, No hours stipulation                                                         |
| Genuine Parts & Accessories                     | 3 Years Standard Warranty (When installed by an Isuzu Trucks Approved Dealership - Including Labor) |
| Service Intervals                               | 25,000 km or 12 Months or 500 hrs (whichever occurs first)                                          |

### Roadside Assist

|                 |                                              |
|-----------------|----------------------------------------------|
| Roadside Assist | 6 Year Roadside Support<br>24/7 Unlimited km |
|-----------------|----------------------------------------------|

<sup>1</sup> Maximum GCM is available on application. To utilise GCM, the vehicle must be fitted with approved towing equipment suited to meet the required GCM ratings in compliance to local regulations.

<sup>2</sup> Performance values are theoretically calculated based on the vehicle at GVM. Real world figures may vary based on driving conditions, vehicle configuration, load and environmental factors.

<sup>3</sup> Accessory Installer must ensure all fitted accessories comply with local road authority regulations and do not compromise safety or certification requirements (eg: ADR compliance)

<sup>4</sup> As shown on tank. Volume of fuel/AdBlue® that can be added to a near-empty tank will vary according to operating conditions.

<sup>5</sup> Vehicle ratings and axle weight limits are subject to government regulatory requirements. Consult your Isuzu dealer to select the correct vehicle for your specific application.

<sup>6</sup> Manufactures nominal tare mass, includes tools, spare wheel (if standard), 10 Litres of fuel and 10 Litres of AdBlue®. Weights subject to ± 3% tolerance.

<sup>7</sup> Drawing for reference only. Refer to the Isuzu Body Builder Guide for details.

<sup>8</sup> Turning circle dimensions are based on manufacturers calculations and may vary under real-world conditions.

<sup>9</sup> Subject to the conditions outlined in the IAL New Vehicle Warranty. All Isuzu warranties are subject to mandatory prescribed terms under Australian Consumer Law including consumer guarantees. For further information please visit [isuzu.com.au](http://isuzu.com.au) or contact your local dealer.

ISUZU AUSTRALIA LIMITED ABN 97 006 962 572 ("IAL"). The information in this specification sheet was correct at time of Publication, all measurements, specifications and equipment are subject to change without notice. Some equipment may have been changed and/or is available at extra cost. IAL may make changes at any time without notice, in prices, colours, materials, equipment and models. IAL makes all reasonable attempts to ensure the availability of all vehicles and equipment. The information in this specification sheet is general in nature. Your Isuzu dealer can confirm all measurements, specifications and vehicle / equipment availability upon request. To the extent permitted by the law, IAL is not liable to any person as result of reliance on the content of this specification sheet. Our National Customer Care Centre provides you access to a team of specialists with years of training. A conversation with an Isuzu specialist is as easy as contacting the team on 1800 035 640 or [customercare@isuzu.net.au](mailto:customercare@isuzu.net.au).

## Isuzu Australia Limited

[www.isuzu.com.au](http://www.isuzu.com.au)