





DIMENSIONS & DIAGRAMS

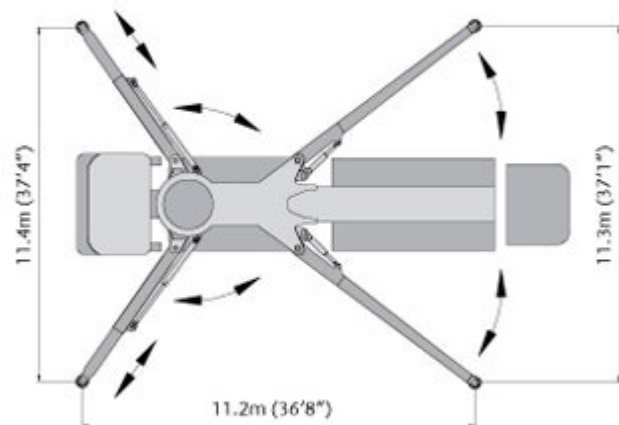

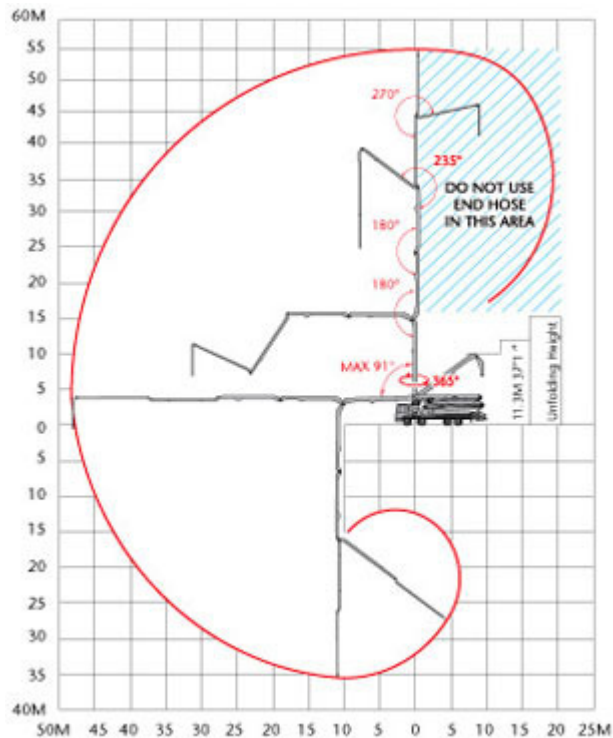

BOOM SPECIFICATIONS

Vertical Reach	55.2 m (181'1)
Horizontal Reach	51.2 m (168')
Unfolding Height	11.3 m (37'1")
1st Section Length	11.3 m (37'1)
2nd Section Length	9.9 m (32'5")
3rd Section Length	9.8 m (32'2")
4th Section Length	10.4 m (34'1")
5th Section Length	9.8 m (32'2")
Front Spread	11.4 m (37'4")
Rear Spread	11.3 m (37'1)

PUMP SPECIFICATIONS

Output: Rod Side	181 m ³ /h (237 yd ³ /h)
Output: Piston Side	122 m ³ /h (160 yd ³ /h)
Pressure: Rod Side	87 bar (1266 psi)
Pressure: Piston Side	130* bar (1880 psi)
Concrete Cylinder Diameter	230 mm (9")
Concrete Cylinder Type	Hard chromed
Stroke Length	2100 mm (83")
S-tube Size	8" x 7"
Main Oil Pump	Rexroth hydromatik Tandem A20VO 180
Hydraulic System Pressure	350 bar (5075 psi)
Lube System (Hopper)	Automatic
Switching System	Hydraulic
Hopper Capacity	Easy Clean 600L (158G)
Number of Strokes/Min	34
Output Control Range	20(26)~181m ³ /h (237yd ³ /h)

GENERAL SPECIFICATIONS

Pipe Size(ID)	125 mm (5")
Elbow	All standard size
Coupling Size	140 mm (5.5")
End Hose Length	4 m (13')
Boom Control Valve	Proportional (by HAWE)
Proportional Radio Remote Control	Standard
Wire Remote Control	Standard
Vibrator	Standard
Water Pump	Rust proof hydraulic power. 20 bar (290 psi)
Water Tank	600 L (158 G)