


LWS & I

WINDOWS AND DOORS

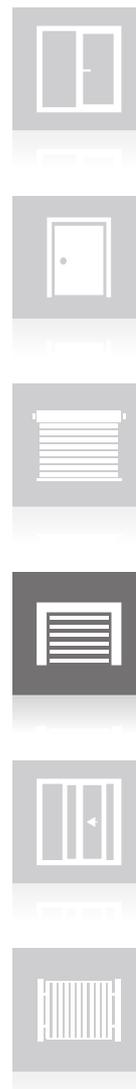

# ROLLER DOORS




AND ROLL-UP GRILLES


# INTENSE 77

ROLL-UP GARAGE DOOR AND INDUSTRIAL DOOR



## DIMENSIONS

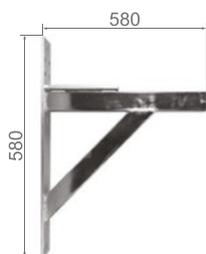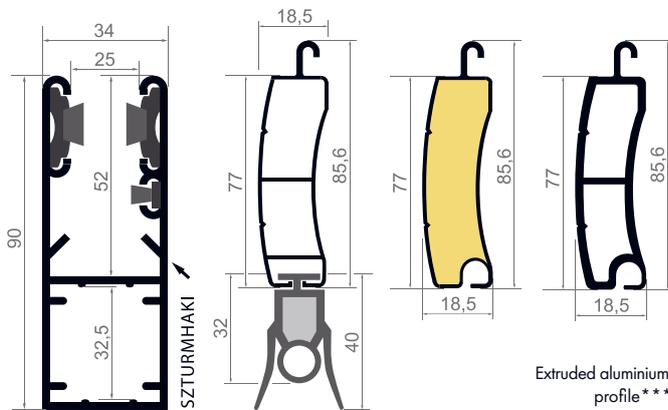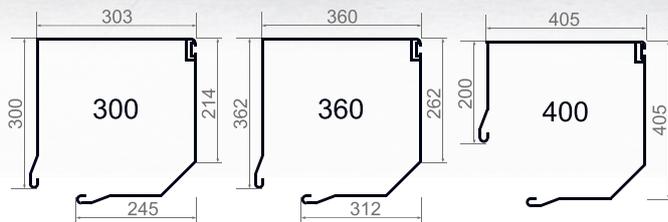

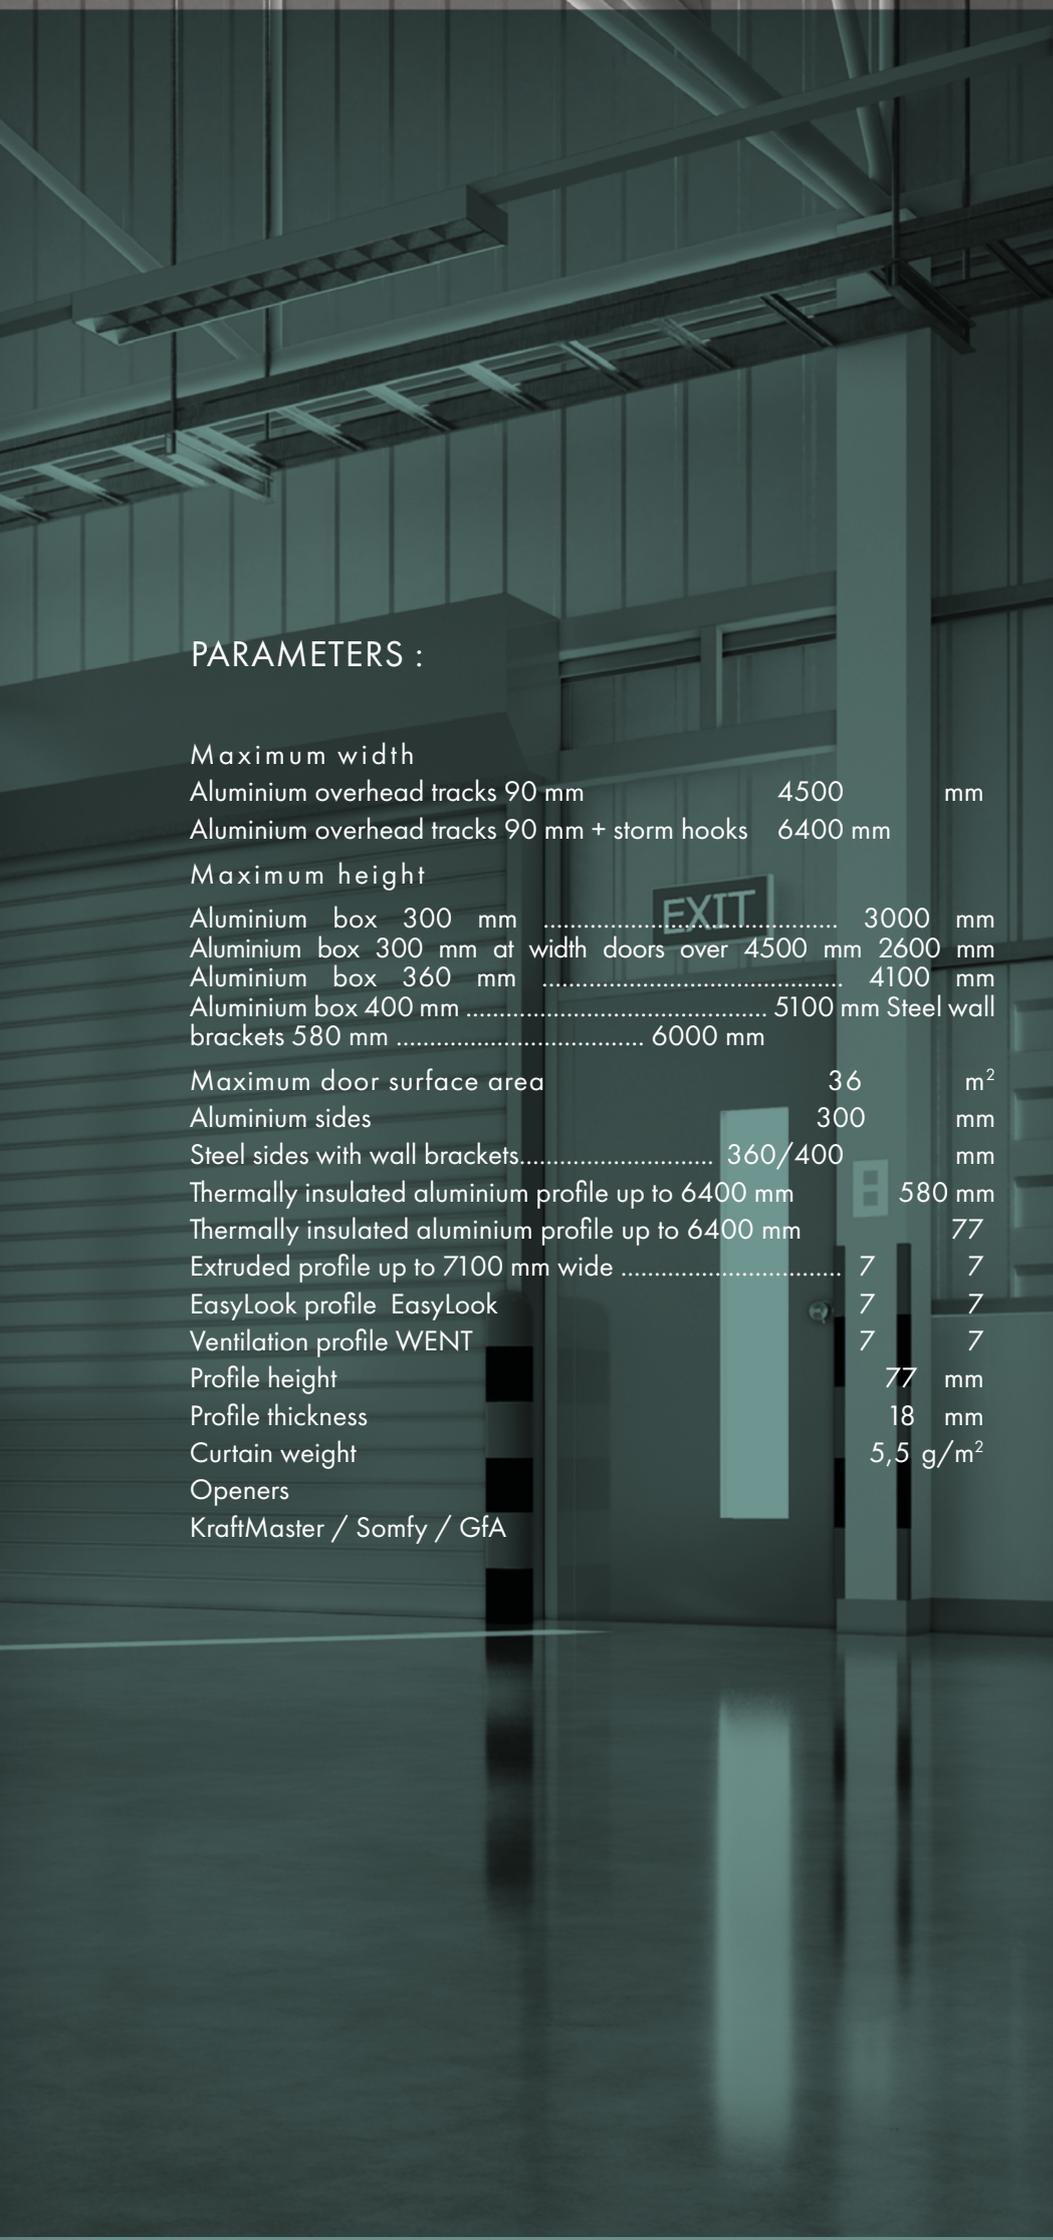

## PARAMETERS :

### Maximum width

Aluminium overhead tracks 90 mm	4500	mm
Aluminium overhead tracks 90 mm + storm hooks	6400 mm	

### Maximum height

Aluminium box 300 mm	3000	mm
Aluminium box 300 mm at width doors over 4500 mm	2600	mm
Aluminium box 360 mm	4100	mm
Aluminium box 400 mm	5100	mm
Aluminium brackets 580 mm	6000	mm

Maximum door surface area	36	m <sup>2</sup>
Aluminium sides	300	mm
Steel sides with wall brackets	360/400	mm
Thermally insulated aluminium profile up to 6400 mm	580	mm
Thermally insulated aluminium profile up to 6400 mm	77	mm
Extruded profile up to 7100 mm wide	7	mm
EasyLook profile EasyLook	7	mm
Ventilation profile WENT	7	mm
Profile height	77	mm
Profile thickness	18	mm
Curtain weight	5,5	g/m <sup>2</sup>
Openers		
KraftMaster / Somfy / GfA		




4 Class  
wind resistant



2 Class  
water resistant

Wind load resistance: CLASS 4  
The test carried out on 4000x2500 mm Intense door using WindOn system and bottom slat reinforcement.  
Resistance to water penetration: CLASS 2

## COLOUR SCHEME

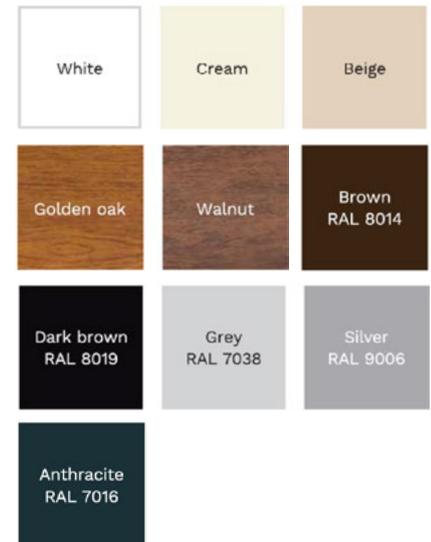

## Additional colours, extra charge 20%



\*\* Element painting: curtain 20%, box 10%, bottom slat 5%, overhead door tracks 5%.

\*\*\* Doors 6400 mm wide and wider are not available in wood-like colours, but only in RAL colours, with no extra charge.

The presented colours are for reference only and may slightly differ from the actual colours.

# CONSTRUCTION

clickON

INSTALL THE DOOR IN ONE HOUR



ACCESSORIES FOR INTENSE DOOR

Prefabricated door structure with maximum dimensions of 7100 x 6000 mm.

The clickON design of the door allows it to be installed anywhere without having to prepare the opening.



# SYSTEM

windON

PROTECTION OF THE DOOR AGAINST WIND

Very often our doors have to operate in really difficult wind conditions, they are exposed to strong gusts and draughts in industrial buildings. Easy! We have a simple and very effective solution for this. We have created the windON system so that all our doors, regardless of the place of installation and weather conditions, work efficiently and continuously.



# SHAFT AND DRIVE HOUSING

PROTECTION OF THE OUTDOOR MECHANISM

The use of a shaft housing and a sicie drive is recommended when installing the door outdoors in order to guarantee proper operating conditions.





# MOUNTING KIT

NOW 2 PEOPLE WILL INSTALL ANY LARGE DOOR

The easyON kit allows you to install the door curtain very quickly! Pull-in straps and foamed polystyrene protection make installation very simple.


easyON

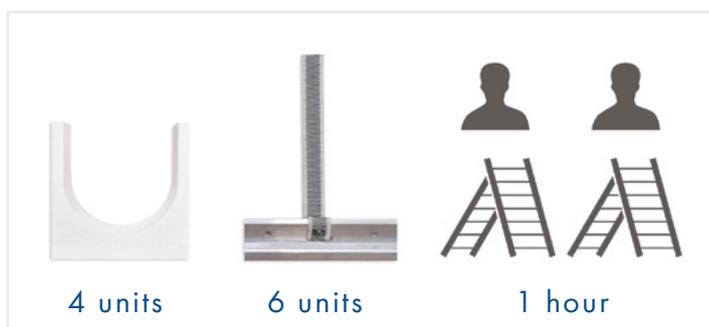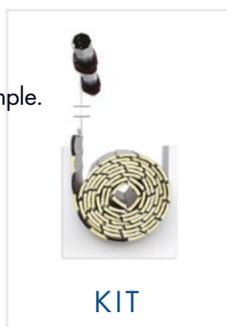






# MINLOOK 56

ROLL-UP GRILLE

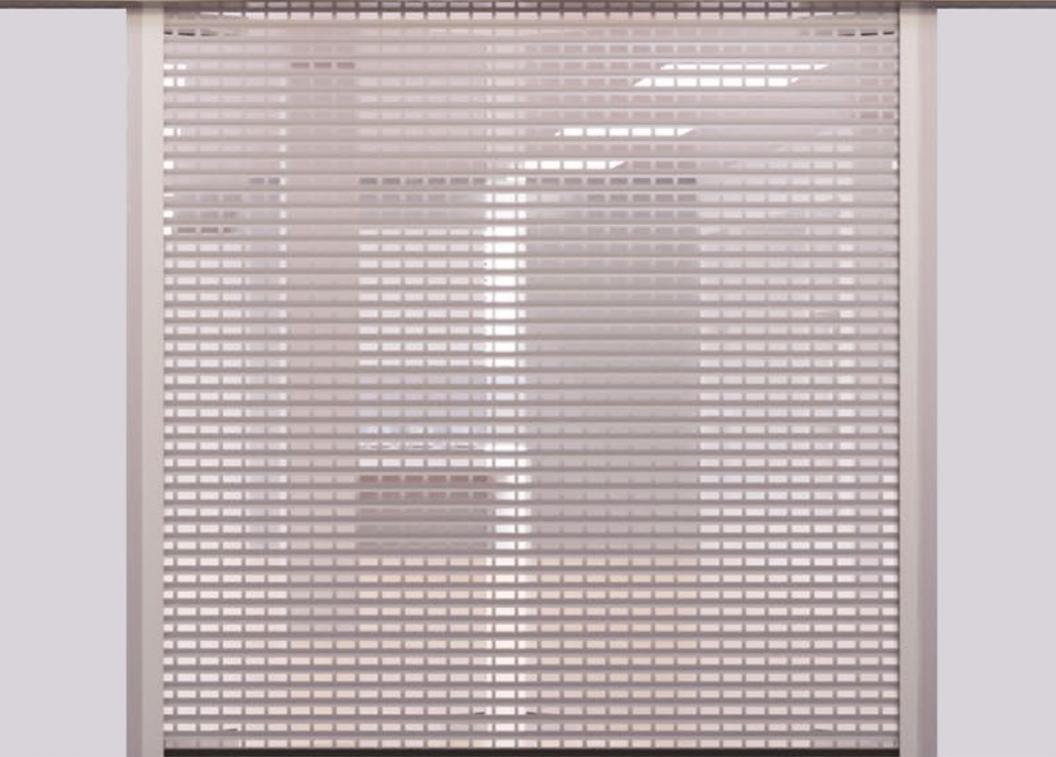

## DIMENSIONS

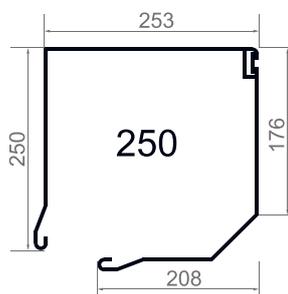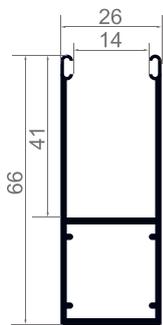



### PARAMETERS:

Maximum width	
Aluminium overhead tracks 66 mm .....	3500 mm
alternately with a solid profile .....	4000 mm
Maximum height	
Aluminium box 250 mm .....	4000 mm
Travelling steel wall brackets .....	4000 mm
Maximum door surface area 15 m <sup>2</sup> Aluminium sides .....	
..... 205 i 250 mm	
Mini Look profile .....	56
Profile height .....	56 mm
Profile thickness .....	14 mm
Curtain weight .....	7 kg/m <sup>2</sup>
Openers .....	KraftMaster / Somfy / GfA

### COLOUR SCHEME


Standard colour

**ANY RAL COLOUR**


The presented colours are for reference only and may slightly differ from the actual colours.


# EASYLOOK 84

ROLL-UP GRILLE

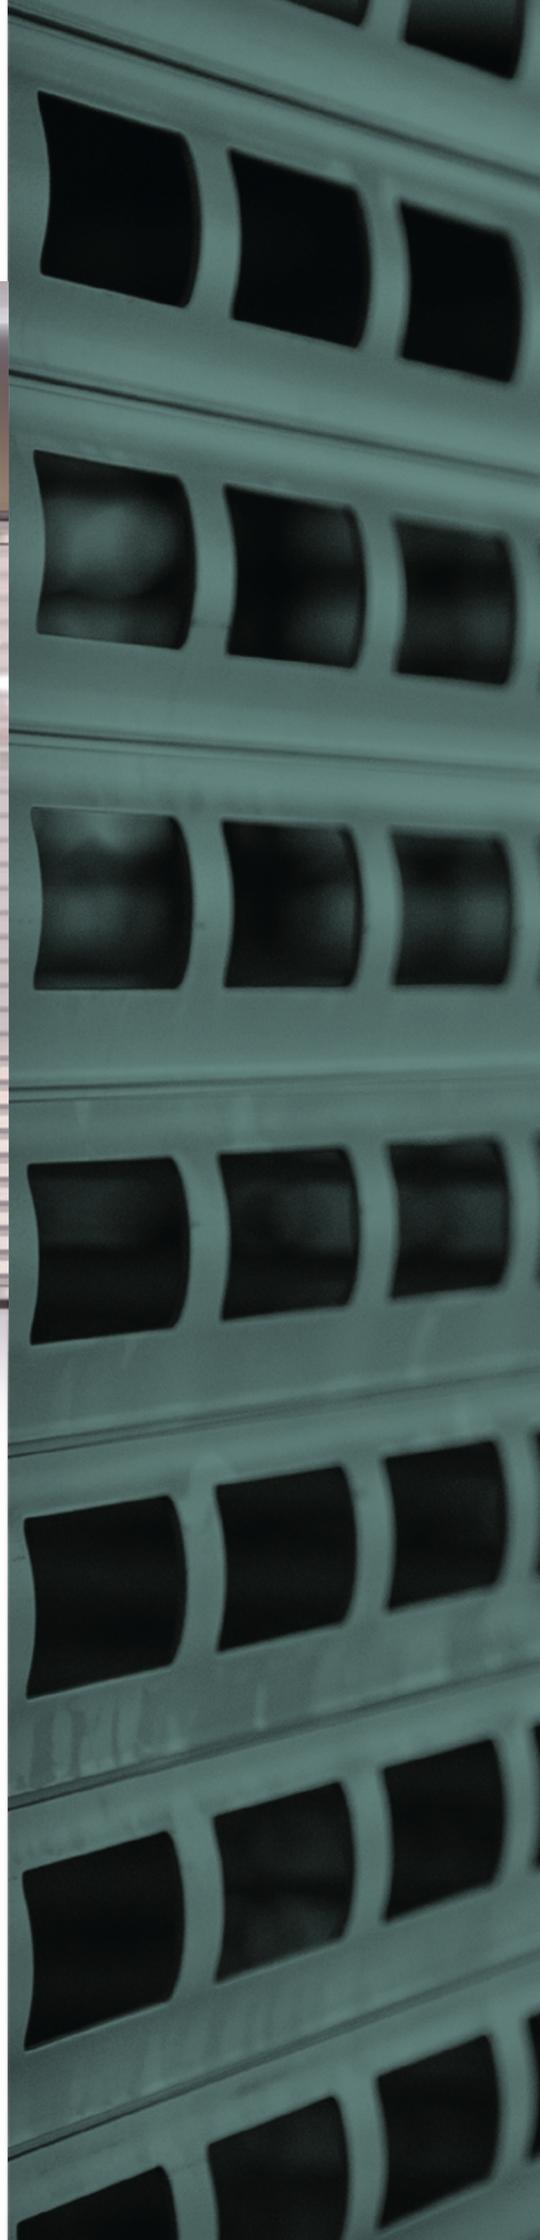

## DIMENSIONS

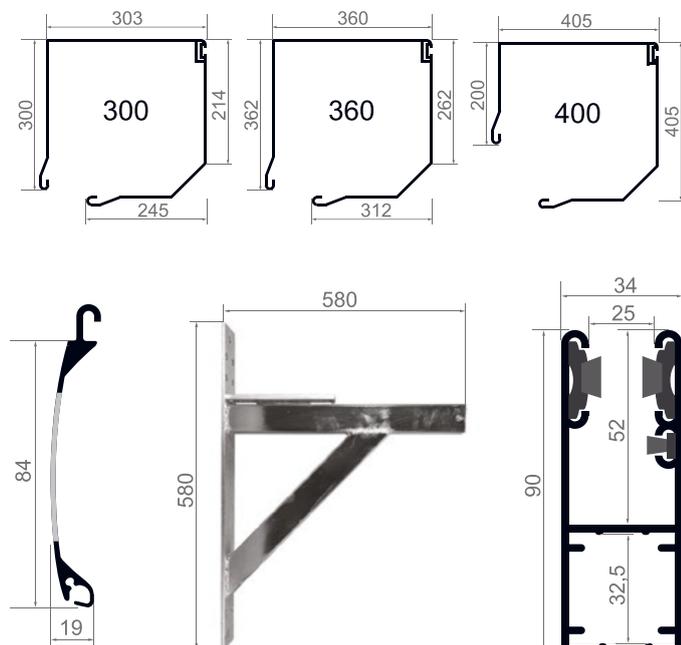

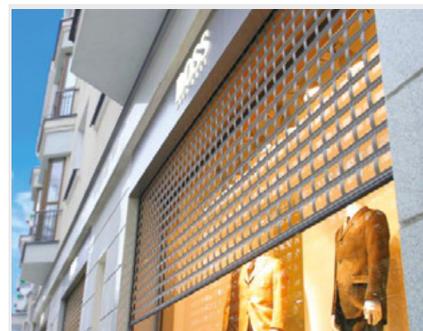

## PARAMETERS:

### Maximum width + wall brackets

Aluminium overhead tracks 90 mm .....	7100 mm
Aluminium overhead tracks 90 mm + box .....	6000 mm

### Maximum height

Aluminium box 300 mm	3200	mm
Aluminium box 300 mm at width grilles		

over 4500 mm .....	3000 mm
--------------------	---------

Aluminium box 360 mm .....	4100 mm
----------------------------	---------

Aluminium box 400 mm .....	5100 mm
----------------------------	---------

Steel wall brackets .....	6000 mm
---------------------------	---------

Maximum grille surface area .....	32,4 m <sup>2</sup>
-----------------------------------	---------------------

Aluminium sides .....	300 mm
-----------------------	--------

Steel sides .....	360 i 400 mm
-------------------	--------------

EasyLook profile .....	EasyLook 84
------------------------	-------------

Profile height .....	84 mm
----------------------	-------

Profile thickness .....	18 mm
-------------------------	-------

Curtain weight .....	9 kg/m <sup>2</sup>
----------------------	---------------------

Openers .....	KraftMaster / Somfy / GfA
---------------	---------------------------

## COLOUR SCHEME

Standard colours

**ANY RAL COLOUR**

The presented colours are for reference only and may slightly differ from the actual colours.

# KRAFTMASTER CONTROL SYSTEMS

## CONTROL UNITS

PROLINE + 2 4-CHANNEL REMOTE CONTROLS



## REMOTE CONTROL

ECOLINE/PROLINE  
4-CHANNEL REMOTE CONTROL



## PHOTOCELLS

PHOTOCELLS  
PROLINE



# GFA ELETROMATEN CONTROL SYSTEMS



CONTROL PANEL  
TS970



CONTROL PANEL  
TS971



4-CHANNEL  
REMOTE  
CONTROL



TRANSMISSION



CONTROL  
PENDANT



SEMAPHORE

## ELECTRICAL SWITCHES

### KEY OPERATED

PULSE

FLUSH  
MOUNTED



SURFACE  
MOUNTED



### KEY TYPE

DIRECTIONAL

PULSE

FLUSH  
MOUNTED



SURFACE  
MOUNTED



FLUSH  
MOUNTED



SURFACE  
MOUNTED



## ACCESSORIES



INERTIA  
SAFETY BRAKE



90°CARDAN  
JOINT



HANGERS  
- LOCKS



CRANK HOLE  
SECURING LOCK



AUGER KIT



EMERGENCY  
OPENING



VENTILATION  
PROFILE



EASYLOOK  
PROFILE WITH  
TRANSPARENT  
SLAT



The publication does not constitute a commercial offer. It is not a basis for submitting complaints. Presented photographs are illustrative pictures, not actual product photos.





1/2023

[www.lwsi.ie](http://www.lwsi.ie)

