

LWS & I
WINDOWS AND DOORS

INTERNAL STEEL DOORS
CATALOGUE



PRESTO XS

DOOR SYSTEM



22

glazing with
packages up to
22mm

50

installation depth of
50mm



slim, narrow profiles, industrial look.



single and double-wing doors



industrial Look





Presto XS is a single-chamber, narrow-profile steel system without a thermal barrier for use in internal constructions with an installation depth of 50 mm. The system includes complete solutions for fittings and accessories and can be used for the production of doors, partition walls, and shop windows.

- installation depth of 50 mm,
- system without thermal barrier,
- glazing with packages up to 22 mm thick,
- system for internal installation,
- profile connections are welded and ground, making the joints invisible,
- welded hinges with top/bottom adjustment,
- profiles flush both inside and outside,
- glazing with glass or panel,
- visible width of sections from 23 mm (fixed windows),
- minimum visible width for the cross-section (frame + leaf) 45 mm,
- opening inward and outward,
- very narrow profiles,
- powder-coated profiles,
- suitable for both traditional and modern construction.





Elliott Erwit

NORM SLIDE

SLIDING DOOR SYSTEM



1-2

leaves

120

maximum weight
(kg)

40

installation depth
(mm)



wall or ceiling mounting




for internal installation



modern appearance



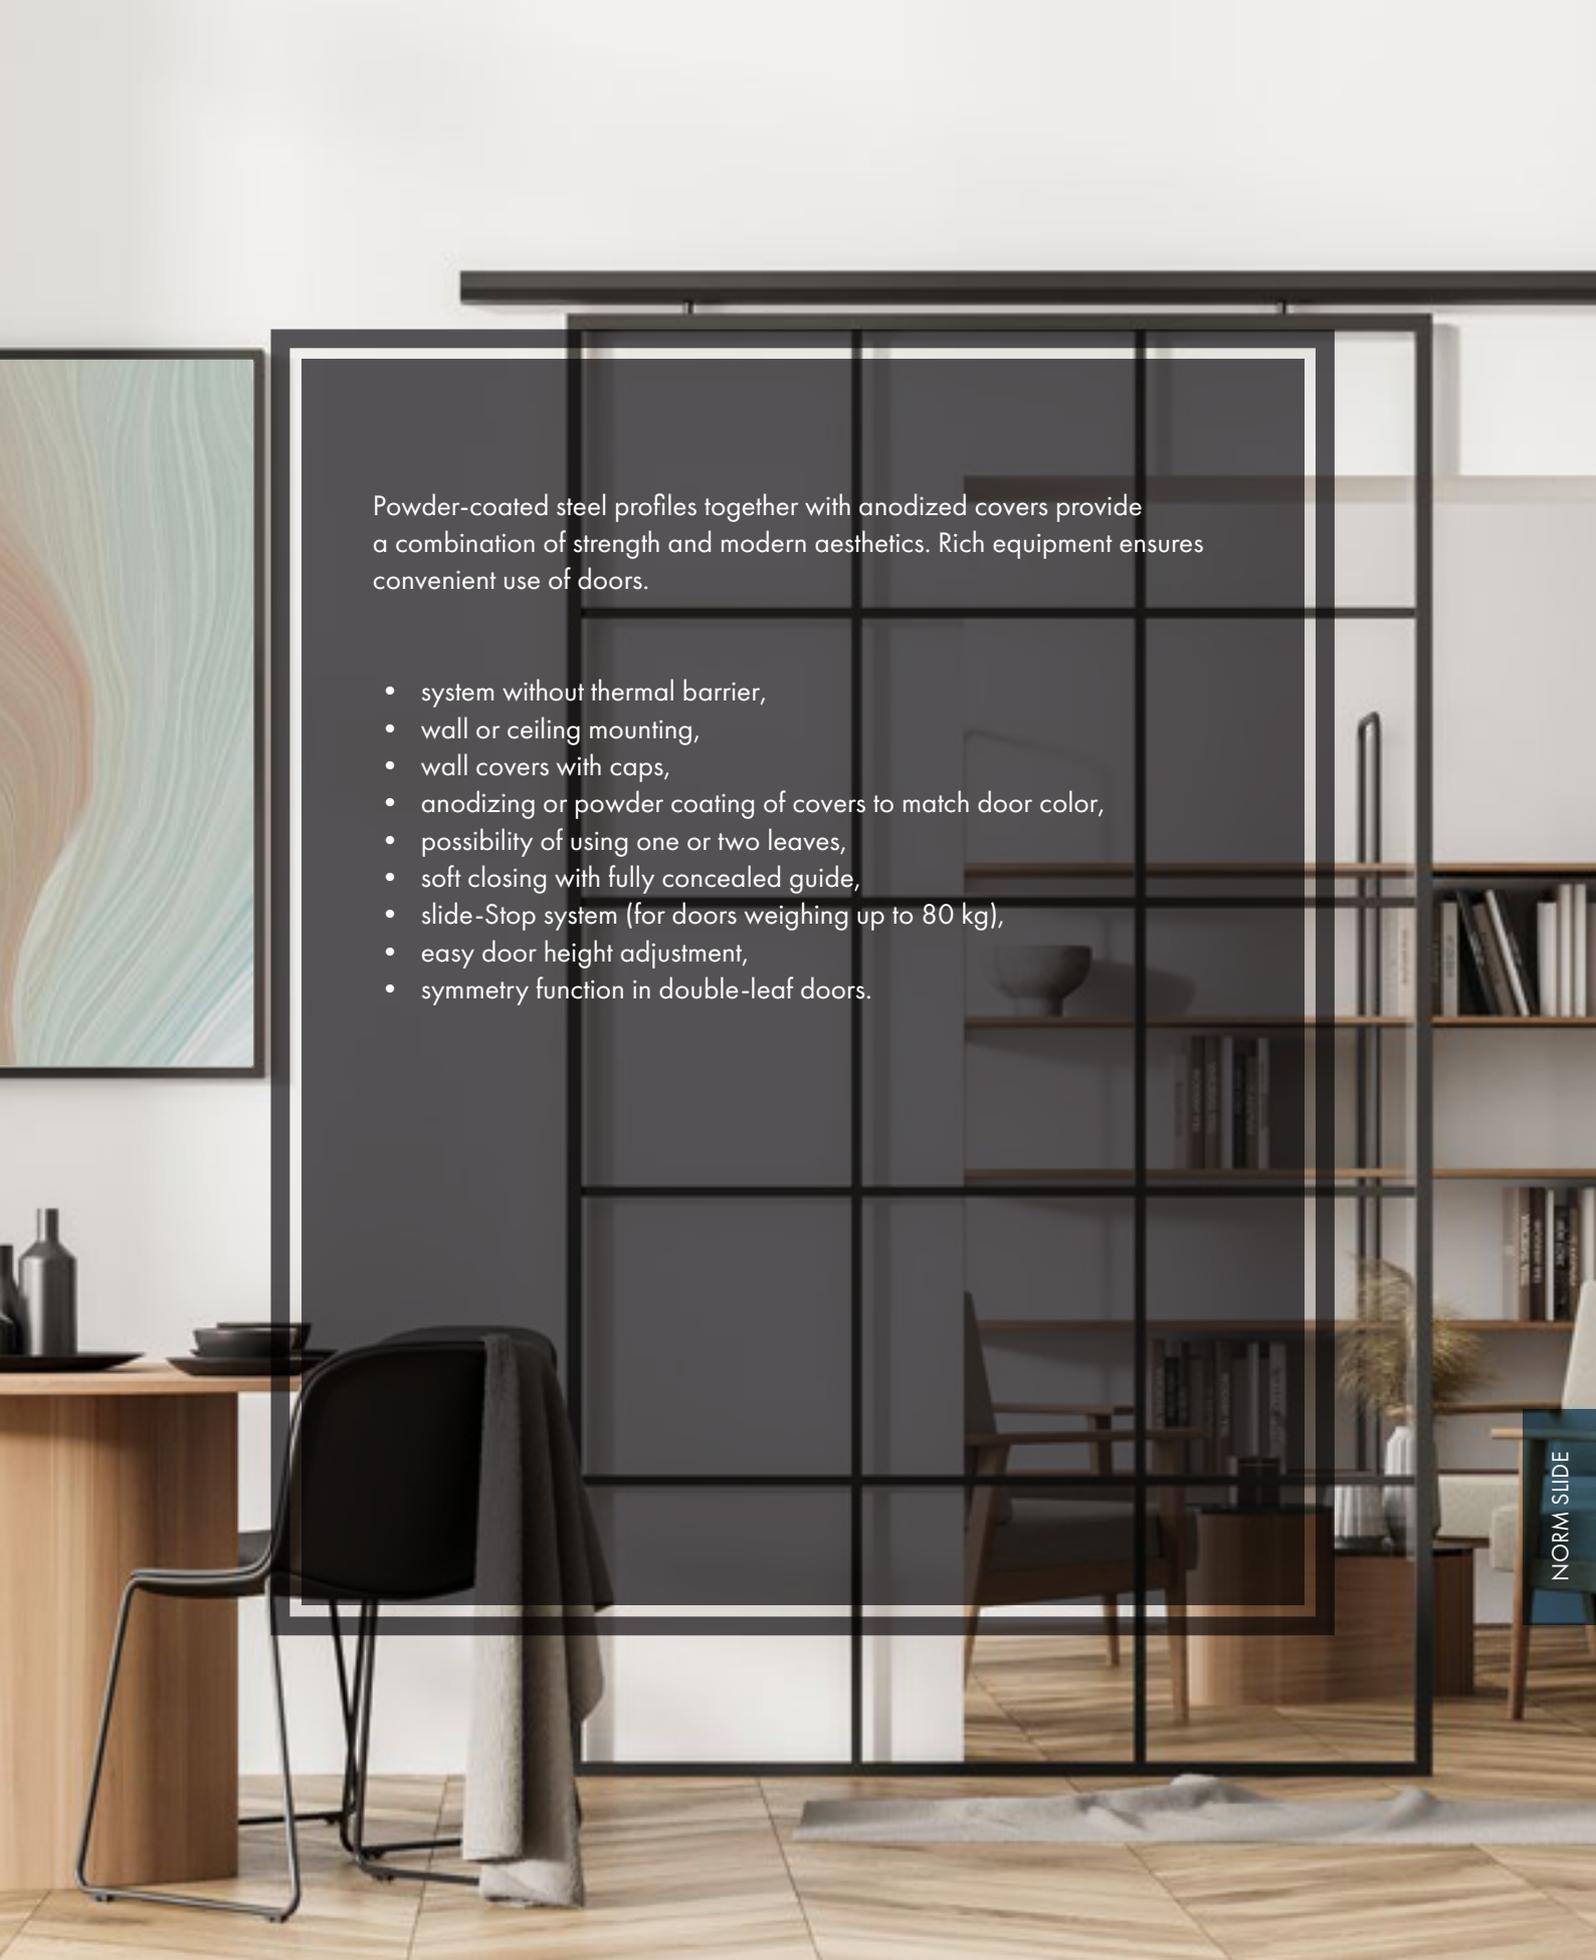

Powder-coated steel profiles together with anodized covers provide a combination of strength and modern aesthetics. Rich equipment ensures convenient use of doors.

- system without thermal barrier,
- wall or ceiling mounting,
- wall covers with caps,
- anodizing or powder coating of covers to match door color,
- possibility of using one or two leaves,
- soft closing with fully concealed guide,
- slide-Stop system (for doors weighing up to 80 kg),
- easy door height adjustment,
- symmetry function in double-leaf doors.

NORM PIVOT

DOOR SYSTEM



2

seals

1

chamber

50

installation depth
(mm)



opening in both directions




for internal installation



industrial look



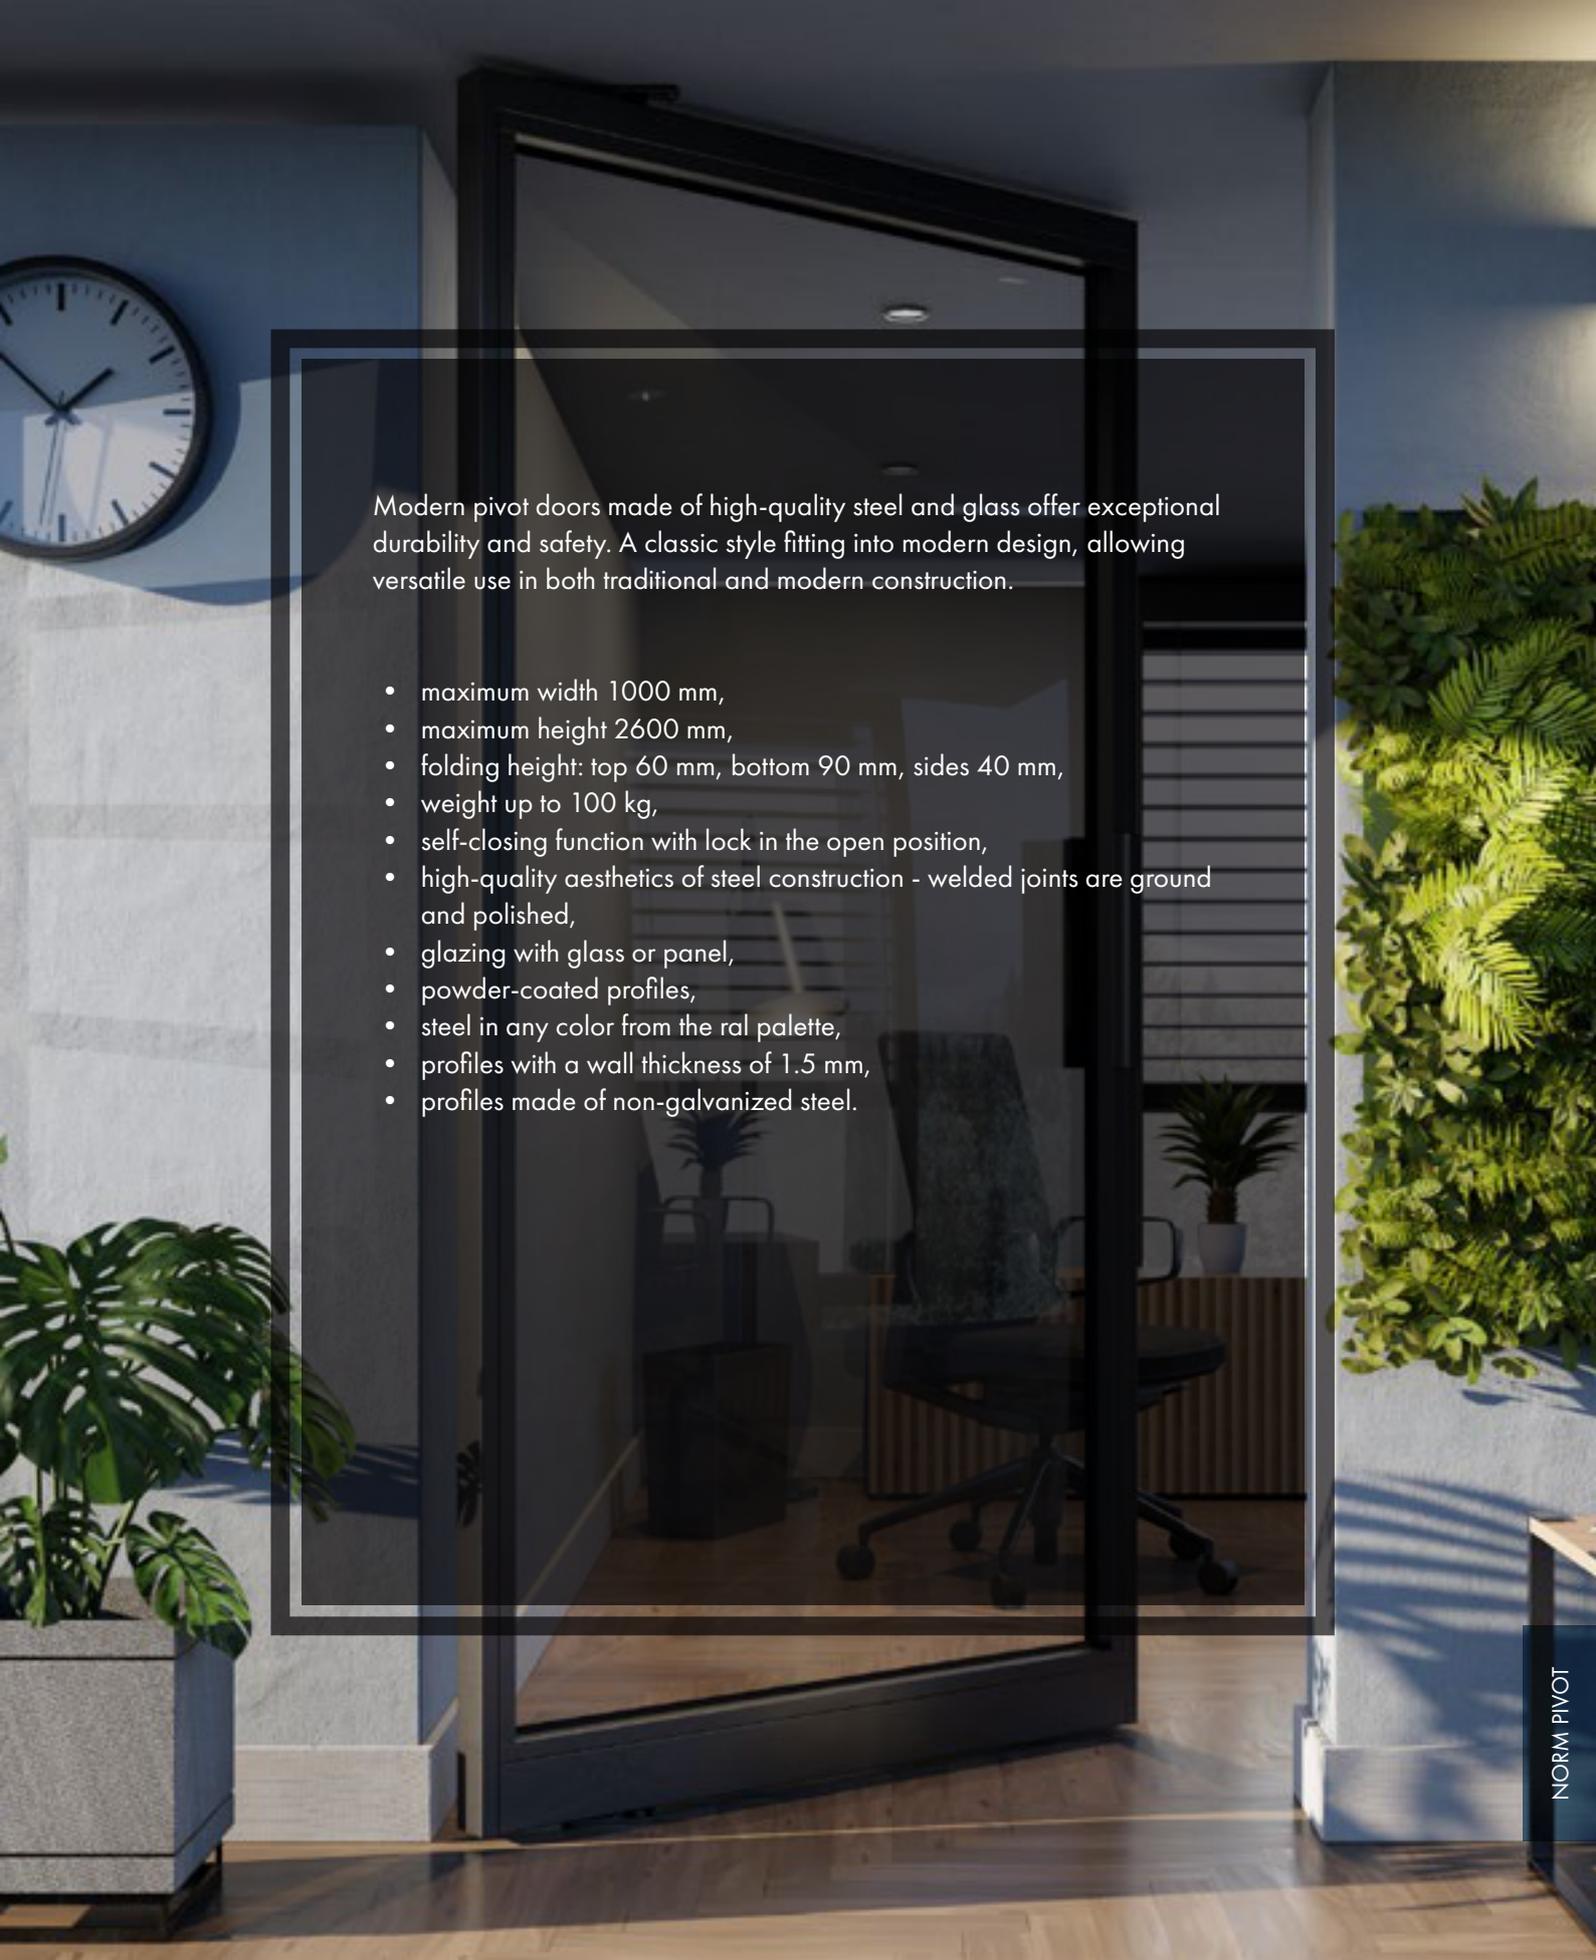


Modern pivot doors made of high-quality steel and glass offer exceptional durability and safety. A classic style fitting into modern design, allowing versatile use in both traditional and modern construction.

- maximum width 1000 mm,
- maximum height 2600 mm,
- folding height: top 60 mm, bottom 90 mm, sides 40 mm,
- weight up to 100 kg,
- self-closing function with lock in the open position,
- high-quality aesthetics of steel construction - welded joints are ground and polished,
- glazing with glass or panel,
- powder-coated profiles,
- steel in any color from the ral palette,
- profiles with a wall thickness of 1.5 mm,
- profiles made of non-galvanized steel.

LOFT

DOOR SYSTEM

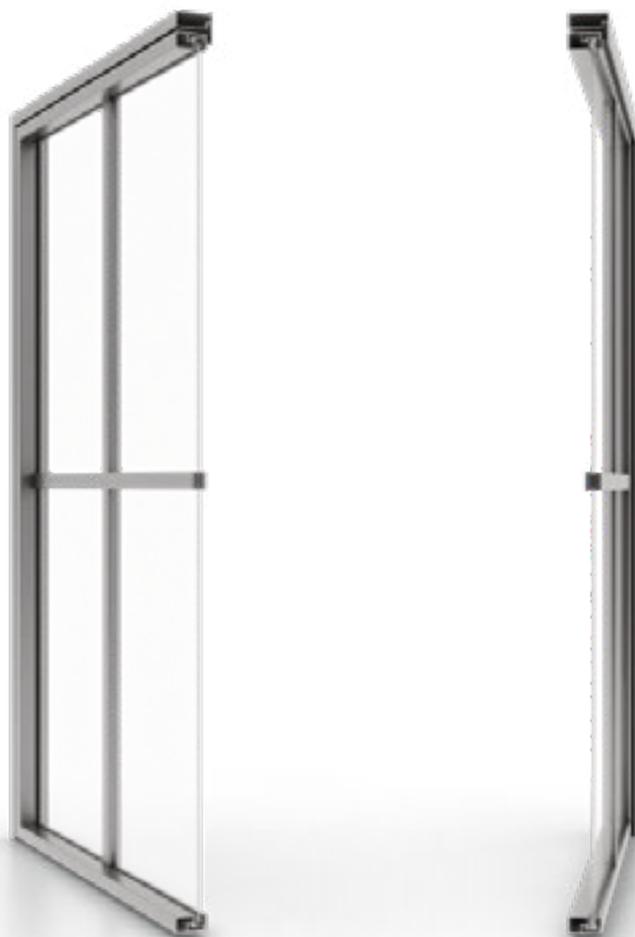

1	1	48
seals	chamber	installation depth (mm)

 flush-mounted system

 system for internal installation

 minimalist design



LOFT

This ultra-thin profile system is designed for use in modern interiors, especially lofts flooded with light. Their large glazing with optional applied muntins fits perfectly into fashionable spacious apartment and office arrangements. Loft allows for the production of single and double-leaf doors as well as fixed partitions.

- system without thermal barrier,
- glazing with glass,
- glazing with packages 6 and 8 mm thick,
- 20 mm wide applied muntins,
- welded hinges with top/bottom adjustment,
- powder coating in ral colors,
- visible width of sections (fixed window) 20 mm,
- visible width of sections (frame + leaf) 44 mm,
- frameless doors.

Loft doors patterns



01

02

03

04

05

FURMANIAK

LOFT

FOLDING DOOR SYSTEM



1

track

80

max. weight (kg)

6

max number of
panels

48

installation depth
(mm)



minimalist design



system for internal installation



flush-mounted system

The Loft folding door system is designed for use in modern interiors, where users want to feel space and enjoy plenty of natural light. Its ultra-light, durable construction is perfect for creating folding systems, providing effective control over space and the ability to redefine it in moments. The charm of the Loft is enhanced by muntins applied to the glass.

- system without thermal barrier,
- glazing with glass,
- glazing with packages 6 and 8 mm thick,
- 20 mm wide applied muntins,
- hinges with vertical adjustment,
- powder coating in ral colors,
- flush-mounted doors.




321



330



422



431



541



550



651



660

HANDLES DEDICATED TO THE LOFT SYSTEM



klamka handle



welded grip



Lucy handle

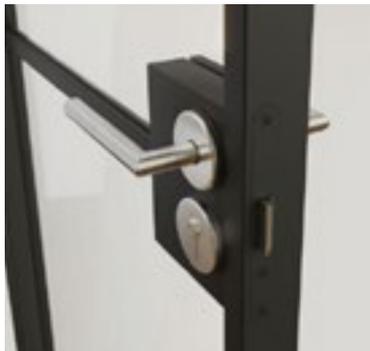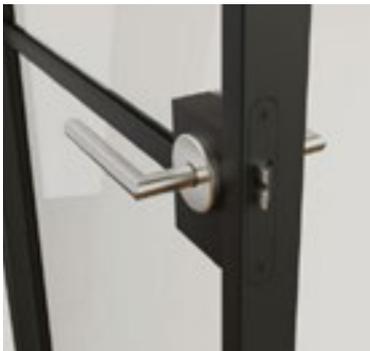

Focus handle





COLOR SCHEME

Windows are increasingly becoming a decorative element, both for the entire building and the interior. All steel joinery elements are powder-coated. Steel profiles offer virtually unlimited possibilities. To achieve the desired color effect, windows can be painted according to the RAL color palette (semi-matt, structure). It is not possible to paint the internal and external sides in different colors.





02.02.2026

