


Version V1.5
PERFORATED METAL ACOUSTIC PANELS



AbsorberLine®

Perforated Metal Acoustic Panels

MF, EV & ULTRA

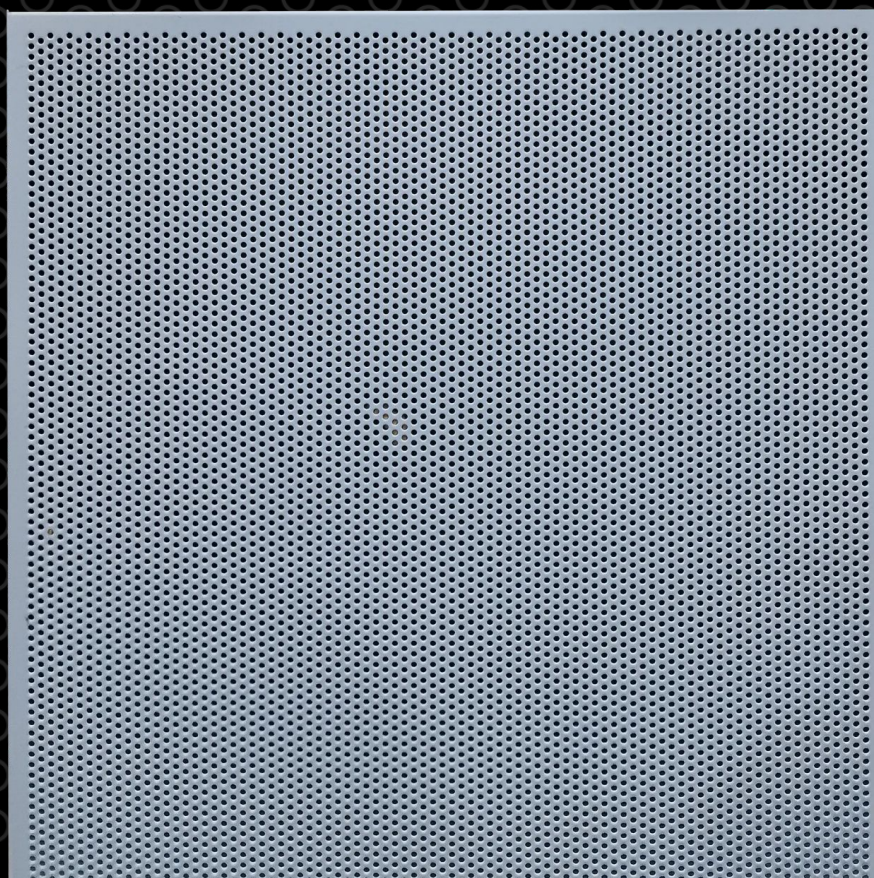

Contact us.

Let's talk about your project.

We are proud of our reputation for excellent service.

Our team will make sure we do everything possible to help you and your project,
as together we can build better.



England, UK Sales Office.

Orchard House, Nottingham.

Mainline: +44 (0)1904 900 194

Enquiries: support@acuphon.co.uk

Finance: accounts@acuphon.co.uk

Made Possible By



Welcome to AbsorberLine®

Elevating Environments with 'High Impact' Metal Acoustic Panels. Uncover the Potential of AbsorberLine® Sound Absorbing Metal Acoustic Panels.

The First Self Healing Metal Acoustic Product on the Market. Introducing AbsorberLine® EV ULTRA.

At AbsorberLine®, we specialise in delivering 'high impact' metal acoustic panels meticulously engineered to revolutionise noise control in various internal and external applications. The inner core and rear of the panel are crafted with substantial mass, while the front inner core is softer, together providing unparalleled sound absorption and sound transmission properties. Our panels offer unmatched performance in sound absorption and sound dampening, ensuring a tranquil environment wherever they are installed.

The AbsorberLine® EV ULTRA presents a distinctive self-healing defense system. When perforations are stamped in a sheet of special grade galvanised steel, each perforation, whether circular or rectangular, will autonomously heal itself, preventing any cut surfaces from oxidising. This panel system can then retain its plain galvanised appearance without concern for panel degradation.

We are dedicated to pushing the boundaries of acoustic technology with our AbsorberLine® metal acoustic panels. With years of industry experience and a passion for innovation, we have become a trusted name in the field of noise control solutions.

Our team of skilled engineers and designers work tirelessly to develop metal acoustic panels that not only meet but exceed expectations. We understand the importance of durability and performance, which is why our panels are designed to withstand the test of time in even the most demanding environments.

We understand that every space has unique acoustic challenges, which is why we offer a range of customisable options to cater to your specific needs. From panel sizes and thicknesses to a variety of finishes and colours, we ensure that our metal acoustic panels seamlessly integrate with your aesthetic preferences and functional requirements.

Experience the transformative power of our AbsorberLine® metal acoustic panels. Discover how they can elevate your space by reducing noise, enhancing acoustics, and creating a more pleasant environment for everyone. Trust in our expertise and let us help you achieve the perfect balance between aesthetics and functionality.

Made Possible By




AbsorberLine® EV (External Rail Application)

Enhancing Railway Trackside Environments with UV Stable and Self-Healing Perforated Steel Acoustics.



AbsorberLine® MF (Internal Justice Application)

Enhancing Acoustics in Prisons & Police Custody Suites with AbsorberLine® Panels – The Ultimate Solution for Sound Control.

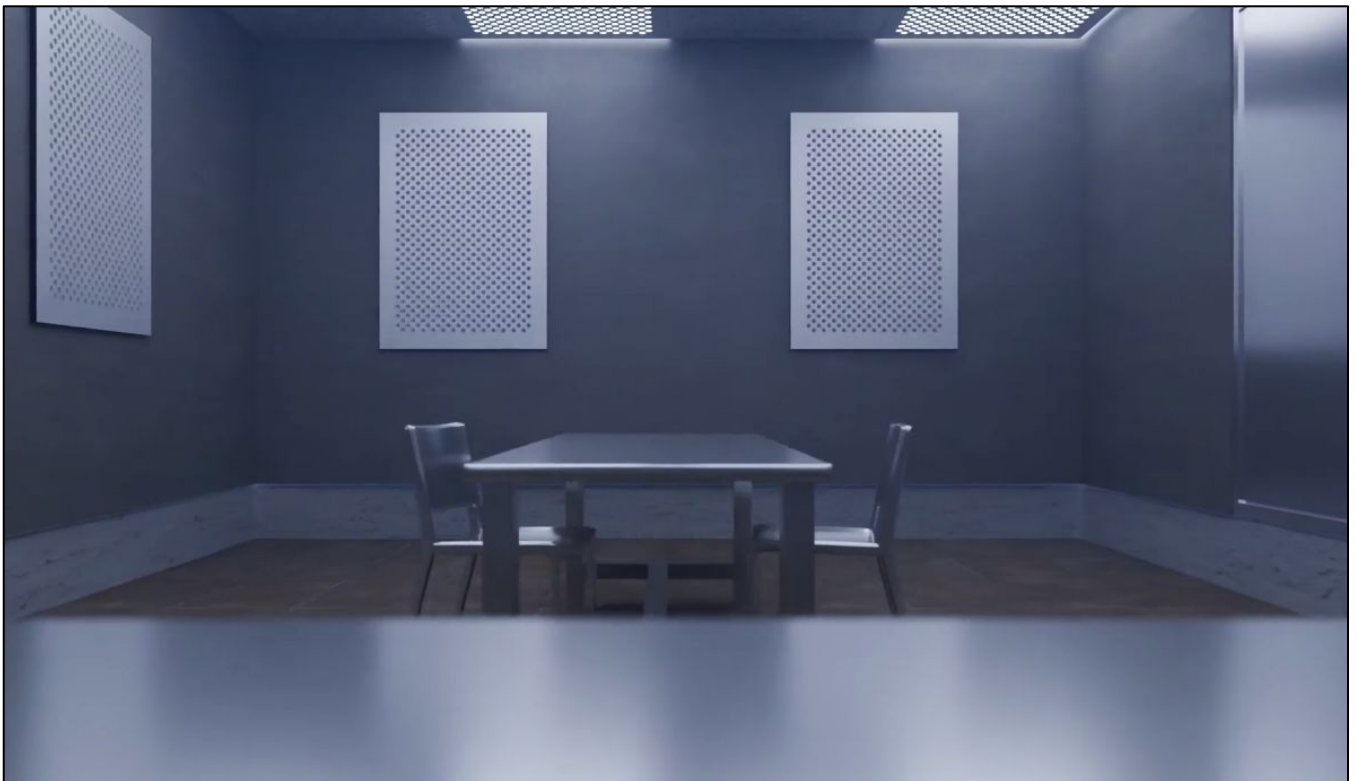

Application videos can be found on <https://www.absorberline.com>

AbsorberLine® Projects.

Check out these success projects to see how communities have made the most out of their site using AbsorberLine®.

[Rail Projects](#)

[Highway Projects](#)

[Architectural Projects](#)

[Justice Projects](#)

[Industrial Projects](#)

**Rail Project,
Brisbane,
Australia**
(Under NDA)

**Recording
Studio, Media
City**

Volvo, Duxford

**HMP
Bronzefield,
Middlesex**

AbsorberLine® EV vs AbsorberLine® MF.

Perforated Steel vs Perforated Self Healing Steel Acoustic Panels




	AbsorberLine® EV	AbsorberLine® EV <u>ULTRA</u>	AbsorberLine® MF
Frame	Galvanised Steel	Patented Self Healing Steel	Galvanised Steel
Infill	EnviroPhon®	EnviroPhon®	Acoustic Mineral Fibre
Frame (Optional)	Patented Perforated Self Healing Steel (optional)	Patented Perforated Self Healing Steel	N/A
Finish	Any RAL (excludes self-healing)	Any RAL (excludes self-healing)	Any RAL
Texture	N/A	N/A	N/A
Application	Internal Or External Use	External Use	For Internal Use with Limited External Use*
Thickness	25mm - 100mm	25mm - 100mm	25mm - 100mm
UV Resistant	Yes	Yes	To a degree
Moisture Resistant	Yes	Yes	To a degree
Impact Resistant	Yes	Yes	Yes
Vermin Resistant	Yes	Yes	Yes
Insect Resistant	Yes	Yes	Yes
Fire Rating	Class B-s2-d0	Class B-s2-d0	*Class A2-s1-d0
Lifespan			
Internal	25 + Years	N/A	25 + Years
External	Up to 5 Years**	Up to 25 Years	N/A

*Fire rating explained:

- **A2** - Limited combustibility. The product will not significantly contribute to a fire and is acceptable for use in most building applications, including areas with stringent fire safety requirements.
- **s1** - Very limited smoke production, which is the best rating in this category. It ensures minimal smoke release, improving visibility and reducing inhalation risk during a fire.
- **d0** - No flaming droplets or particles within 600 seconds of exposure. This prevents burning material from falling and potentially spreading fire or endangering people evacuating.

Although galvanised steel has well known life expectancy of 30-60 years, when you perforate the steel you cut through the galvanised layer exposing the steel. As the steel has to be galvanised prior to the perforating process. So the metal will begin to rust in 5 years. For all high humidity and wet environments we highly advise the use of AbsorberLine® EV ULTRA as its self healing properties help re-seal the perforations, ensuring protection for up to 20 years in wet applications.

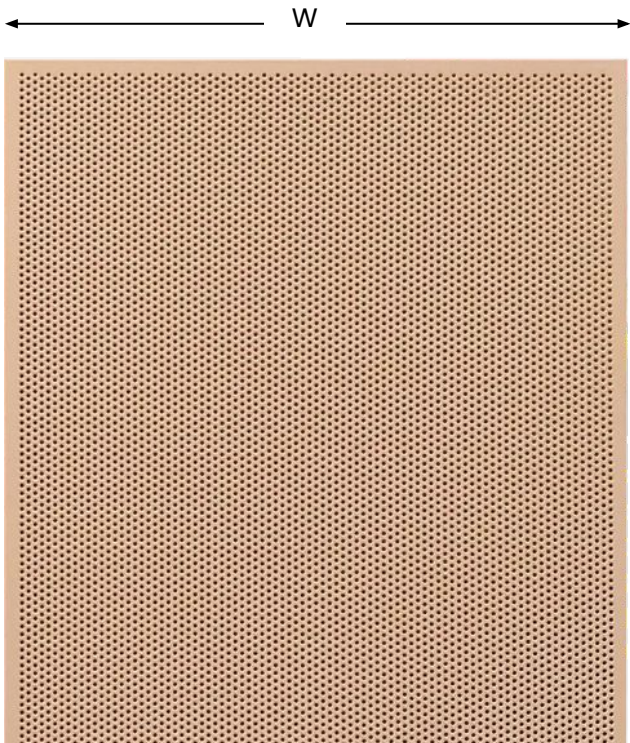

W – Width | D – Depth | L – Length

Depth (mm)	Length (mm)*	Width (mm)
50	2500 and 3000	266 and 475
65	2500 and 3000	230 and 440
100	2500 and 3000	167 and 375

Packaging, Handling & Storage.

- AbsorberLine® panels, channels and other accessories are supplied flat and packed onto timber pallets, shrink wrapped and strapped. All our materials should be stored flat and kept indoors in a dry ‘well ventilated’ area. Care should always be taken when handling material to avoid damage. Gloves should be worn at all times whilst handling.

Technical Advice.

- It is recommended that all individual projects are discussed with our team of highly qualified technical engineers and are available to offer assistance and advice to clients, architects and contractors on all aspects of noise control to ensure design specifications and acoustic performance requirements are achieved.

Specification.

AbsorberLine® perforated metal acoustic panels are UV-stable decorative acoustic wall, ceiling, and barrier treatment panels designed for use in both industrial and architectural settings. They are ideal for areas that require an attractive appearance with a contemporary feel. AbsorberLine® panels are designed to absorb airborne noise and reduce reverberation, creating a softer and more comfortable acoustic environment. Additionally, they offer high impact resistance and exceptional durability for areas needing rugged and functional acoustic wall panelling.

The panels are manufactured from galvanised perforated steel (with aluminium as an option) and include a sound-absorbing infill. This infill is faced with either black or white UV-stable tissue to prevent fibre migration and strobing. Alternatively, a selection of coloured acoustic fabrics can be used to enhance the aesthetic appeal. The perforated steel panels provide a high degree of impact resistance and a cleanable surface.

Material Variants (Acoustic Infills & Reaction to Fire).

- **EV – Envirophon®:** For external applications (Class B-s2-d0)
- **MF – Mineral Fibre:** For internal applications (Class A1)

Weight.

- Actual weights are provided on the equipment schedule.
- Approximate weight: 11 – 14 kg/m².

Standard Sizes.

- Most efficient configuration: Staggered perforation.

Thermal Conductivity.

- 0.33 W/mk @ 10°C

Applications.

- Correctional facilities, Prisons and Police interview rooms.
- Absorptive barrier fencing to reduce rail noise.
- Factories, Plant rooms and Industrial enclosures.
- Atria wall lining.
- Architectural wall lining for studios and radio broadcasting suites.
- Sports Halls and Sports Stadia.

Operating Temperature.

- Suitable for normal building and environmental temperatures.

Colour and Finish.

- Plain galvanised finish or powder coated to any RAL colour, subject to minimum order quantity.

Acoustic Performance.

Versatility and Adaptability in Any Environment


AbsorberLine® panels excel in a wide range of external applications, showcasing their versatility and adaptability. Whether installed at noisy construction sites or in bustling urban areas, these panels offer unparalleled exterior grade sound absorption. By effectively reducing noise levels, they create a quieter and more comfortable environment for both workers and the surrounding community. Their robust design ensures they can withstand harsh outdoor conditions while maintaining their sound absorbing properties and aesthetic appeal.

AbsorberLine MF

Product Description			Sound Absorption Coefficient (Tested to BS EN ISO 354:2003) Octave Bands (Hz)									Building Regulations Absorber Classification When tested to BS EN ISO 11654-1997	
			Airgap	Depth	125	250	500	1k	2k	4k	5k		
Absorber- Line MF	Direct	50mm	0.35	0.75	1.00	1.00	1.00	1.00	0.77	1.00	0.94	A	
	Direct	100mm	0.65	1.00	1.00	1.00	1.00	1.00	0.84	1.00	1.00	A	

AbsorberLine EV Variants

Product Description			Sound Absorption Coefficient (Tested to BS EN ISO 354:2003) Octave Bands (Hz)										Building Regulations Absorber Classification When tested to BS EN ISO 11654-1997
	Airgap	Depth	100	125	250	500	1k	2k	4k	5k	αw	NRC	
Absorber- Line EV variants	Direct	50mm	0.26	0.28	0.54	1.02	0.95	0.94	0.83	0.77	0.85	0.85	B
	15mm	65mm	0.14	0.15	0.65	0.96	0.94	0.96	0.85	0.84	0.95	0.90	A
	50mm	100mm	0.18	0.19	0.63	0.99	0.94	1.00	0.87	0.87	0.95	0.90	A

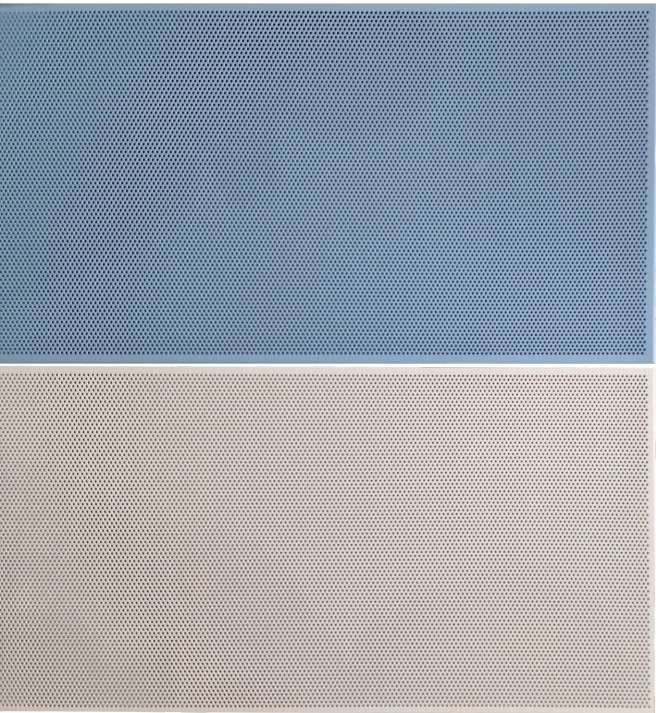

PERFORATED METAL ACOUSTIC PANELS.

Variant EV – AbsorberLine® EV

SPECIFICATION

Key Benefits:

- External Use.
- UV Stable.
- Patented perforated self healing steel.
- Superior, waterproof sound absorption EnviroPhon® infill.



Introducing AbsorberLine® EV (ft EnviroPhon® patented technology): Unleash the Power of Environmentally Friendly Acoustics with Exterior Grade Sound Absorption.

The Ideal Solution for Noise Control in Transportation Corridors, Effectively Reducing Noise from Motorways and Railways.

Motorways and railways are notorious for generating high levels of noise, causing discomfort for nearby residents and commuters. AbsorberLine® EV panels provide a highly effective solution for reducing noise pollution in transportation corridors. By strategically installing these panels along motorways and railways, the impact of noise from passing vehicles and trains can be significantly mitigated, creating a more peaceful and liveable environment for surrounding communities for 25 years.

Unrivalled Sound Absorption with EnviroPhon Technology.

EnviroPhon filled AbsorberLine® EV panels set a new standard for perforated metal acoustic panels, harnessing the power of EnviroPhon® UV stable, water resistant technology. These panels feature an infill of advanced sound-absorbing EnviroPhon®, which maximises their ability to effectively absorb and control external noise for 25 years.

Sustainable Acoustics for a Greener World.

By using EnviroPhon® infill in our AbsorberLine® panel system, you not only achieve exceptional acoustic performance but also contribute to a greener world. The EnviroPhon® infill is made from environmentally friendly materials, prioritising sustainability and reducing your carbon footprint without compromising on sound absorption excellence.

Product Description			Sound Absorption Coefficient (Tested to BS EN ISO 354:2003) Octave Bands (Hz)										Building Regulations Absorber Classification When tested to BS EN ISO 11654-1997
	Airgap	Depth	100	125	250	500	1k	2k	4k	5k	aw	NRC	
Absorber- Line EV	Direct	50mm	0.26	0.28	0.54	1.02	0.95	0.94	0.83	0.77	0.85	0.85	B
	15mm	65mm	0.14	0.15	0.65	0.96	0.94	0.96	0.85	0.84	0.95	0.90	A
	50mm	100mm	0.18	0.19	0.63	0.99	0.94	1.00	0.87	0.87	0.95	0.90	A

PERFORATED METAL ACOUSTIC PANELS.

Variant MF – AbsorberLine® MF



SPECIFICATION

Key Benefits:

- Internal Use.
- Any RAL finish.
- Mineral Fibre infill.
- UV Stable.

Introducing AbsorberLine® MF: The Ultimate Metal Acoustic Panel Solution.

Enhanced Acoustic Performance with AbsorberLine® MF.

AbsorberLine® MF is a revolutionary perforated metal acoustic panel solution designed to deliver exceptional sound absorption capabilities. Manufactured from a galvanised frame with a sound-absorbing mineral fibre (MF) infill, these panels provide superior acoustics in various environments.

Aesthetic Appeal and Customisation Options.

With AbsorberLine® MF, you don't have to compromise on aesthetics. The outer face of the mineral fibre infill is covered with black or white glass tissue as standard. Other colours may be available upon request. In addition, alternative facings can be applied to prevent the ingress of fuel, oil, lubricants, and other substances. AbsorberLine® MF achieves the perfect balance of functionality and visual appeal, our panels offer a wide range of colour choices using the RAL and Pantone colour chart systems for the steel casing and the exposed channel system option.

Durability, Impact Resistance and UV Stability.

AbsorberLine® MF panels are constructed to withstand mild to high levels of impact, making them ideal for areas where durability is crucial. The galvanised steel frame provides robustness and longevity, ensuring that the panels maintain their structural integrity over years to come.

NOTE: The black facing behind the perforations attained a rating of 5/5 following exposure to UV light for 250 and 500 hours, showing no discernible alteration in colour. After exposure for 750 and 1000 hours, it received a rating of 4/5, with no significant loss in depth but a slight reddening of the colour.

Product Description			Sound Absorption Coefficient (Tested to BS EN ISO 354:2003) Octave Bands (Hz)									Building Regulations Absorber Classification When tested to BS EN ISO 11654-1997
	Airgap	Depth	125	250	500	1k	2k	4k	5k	aw	NRC	
Absorber- Line MF	Direct	50mm	0.35	0.75	1.00	1.00	1.00	1.00	0.77	1.00	0.94	A
	Direct	100mm	0.65	1.00	1.00	1.00	1.00	1.00	0.84	1.00	1.00	A

EXTERNAL ACOUSTIC INFILL.
EnviroPhon® infill



ACOUSTIC PERFORMANCE

EnviroPhon® is a unique sound absorbing Polyethylene foam both suitable for internal use and external use. EnviroPhon® has a unique honeycomb cell structure however still its classed a closed cell foam, this cell structure allows the foam to all the benefits of a closed cell foam as well as being an excellent sound absorbing material. EnviroPhon® has the added benefit of being resistant to water and will not diminish in the presence of moisture.

SPECIFICATION

External UV resistant sound absorption foam Class A Absorption, with an SAA of 0.98

Versatile Applications for EnviroPhon® Acoustic Panels.

EnviroPhon® Acoustic Foam offers versatile applications across various industries and environments. Whether you need to reduce noise in offices, conference rooms, restaurants, theatres, swimming pools or manufacturing facilities, this foam is the perfect solution.

Sustainability and Environmental Consciousness.

EnviroPhon® Acoustic Panels prioritise sustainability and environmental consciousness. Constructed from eco-friendly materials, these acoustic foam sheets are designed to minimise impact on the environment. By choosing EnviroPhon® water resistant, sound absorbing acoustic foam, you're making a responsible choice that aligns with your commitment to sustainability.

Long-lasting Performance and Low Maintenance.

EnviroPhon® acoustic foam sheets are engineered for long lasting performance with minimal maintenance. EnviroPhon's unusual and durable construction ensures it retains its acoustic properties even in demanding environments. With EnviroPhon® acoustic foam, you can enjoy the benefits of effective noise reduction without the need of frequent upkeep.

Thickness (mm)	Height (mm)*	Width (mm)
20	2400	1200
30	2400	1200
40	2400	1200
50	2400	1200


EnviroPhon®	Thickness (mm)	Sound Absorption Coefficient (tested to BS EN ISO 354) Octave Bands (Hz)								Building Regulations Absorber Classification When tested to BS EN ISO 11654-1997
		125	250	500	1k	2k	4k	αw	NRC	
Direct fix to substrate	20mm	0.05	0.18	0.71	1.07	0.96	0.91	0.50	0.75	D
Direct fix to substrate	40mm	0.06	0.51	0.99	1.08	1.05	0.84	0.90	0.90	A
Direct fix to substrate	50mm	0.16	0.69	0.99	1.09	1.09	0.91	1.00	1.00	A

PERFORATED METAL ACOUSTIC PANELS.

Perf Variations

POSSIBLE PERFORATION DESIGNS

NOTE:
Variations in perforation patterns do not impact the acoustic performance of AbsorberLine® MF or EV panel systems. Regardless of the specific design chosen, these panels will deliver the same acoustic performance as the standard perforated design displayed above. It's important to note that the perforations are solely for aesthetic purposes

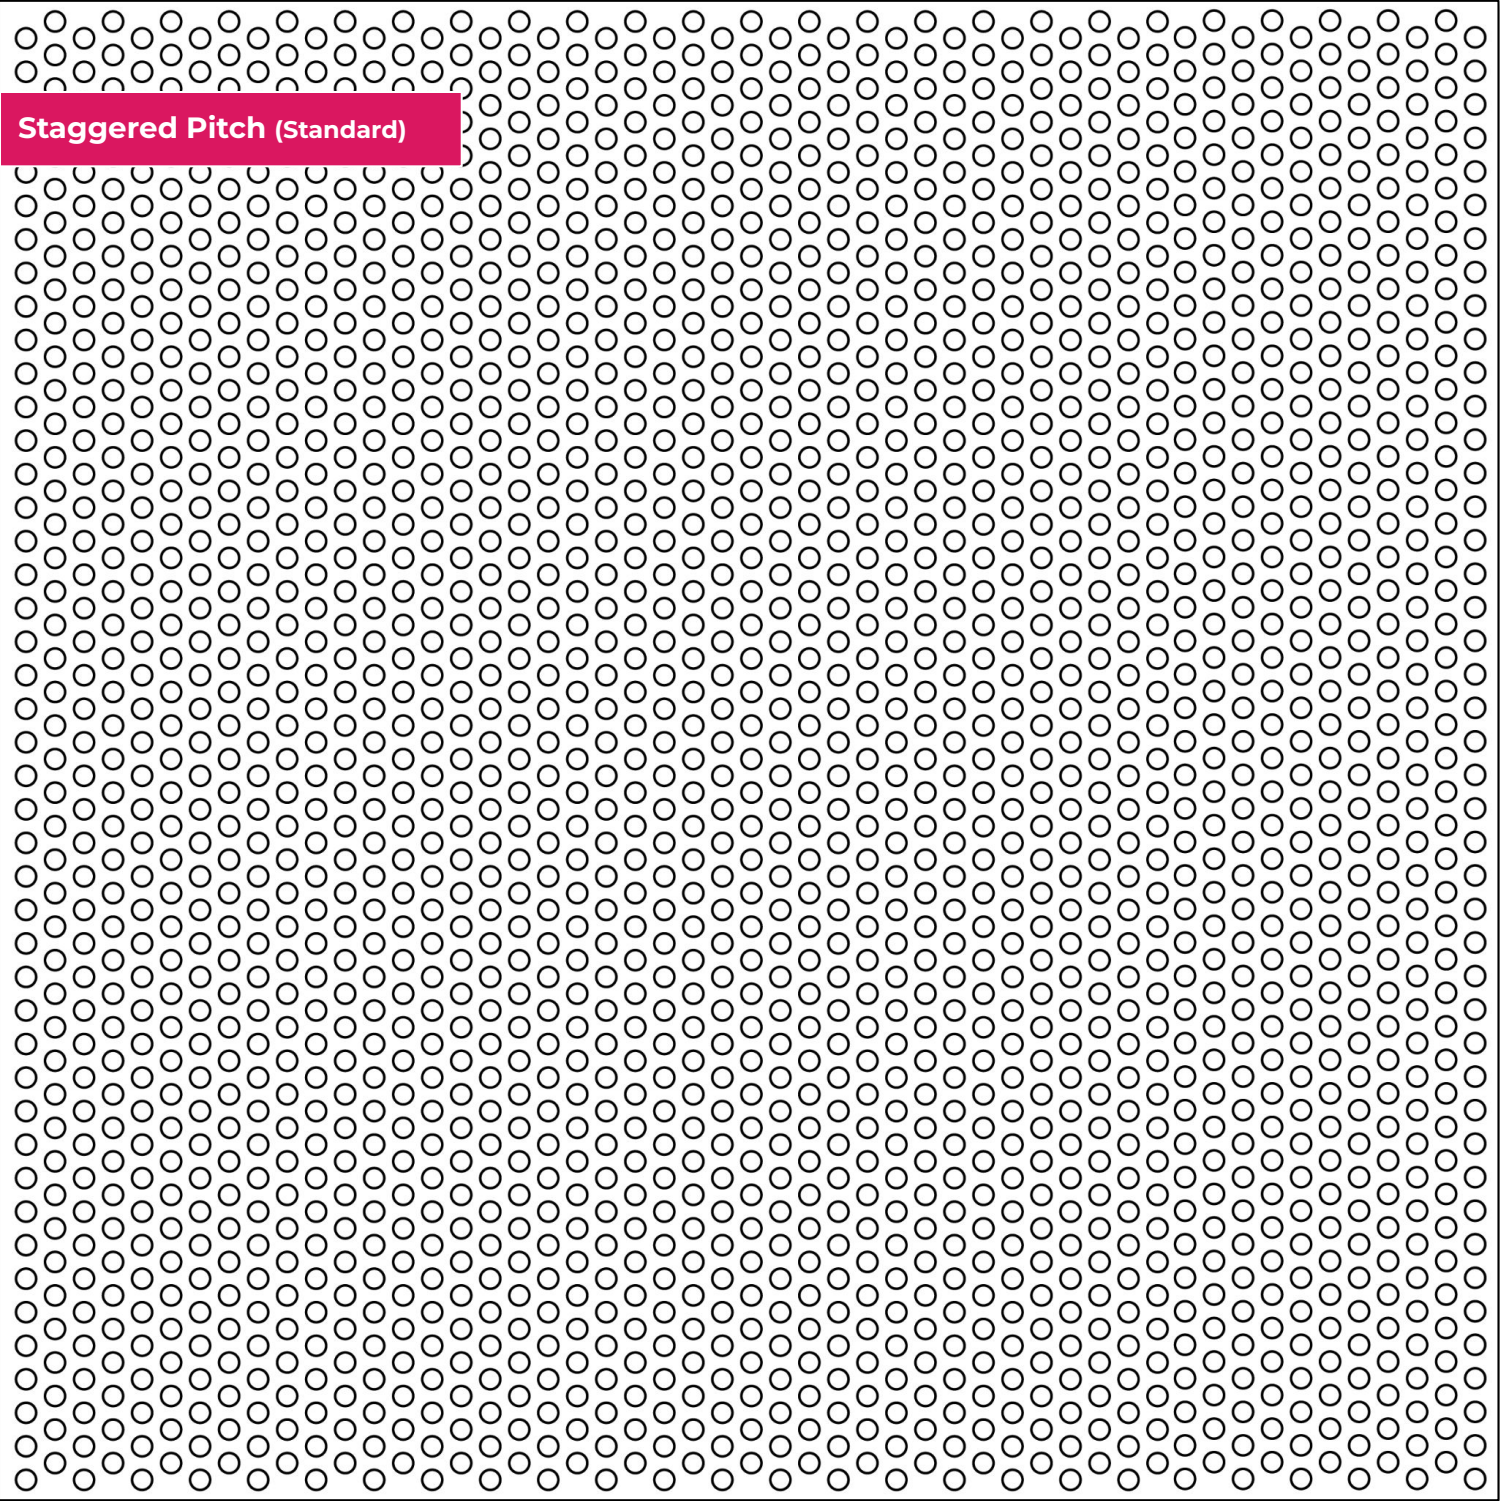


Thickness (mm)	Max Height (mm) *	Max Width (mm)
25	2500 - 3000	1100
50	2500 - 3000	1050

PERFORATED METAL ACOUSTIC PANELS.

Perf Variations

POSSIBLE PERFORATION DESIGNS

NOTE:
Variations in perforation patterns do not impact the acoustic performance of AbsorberLine® MF or EV panel systems. Regardless of the specific design chosen, these panels will deliver the same acoustic performance as the standard perforated design displayed above. It's important to note that the perforations are solely for aesthetic purposes

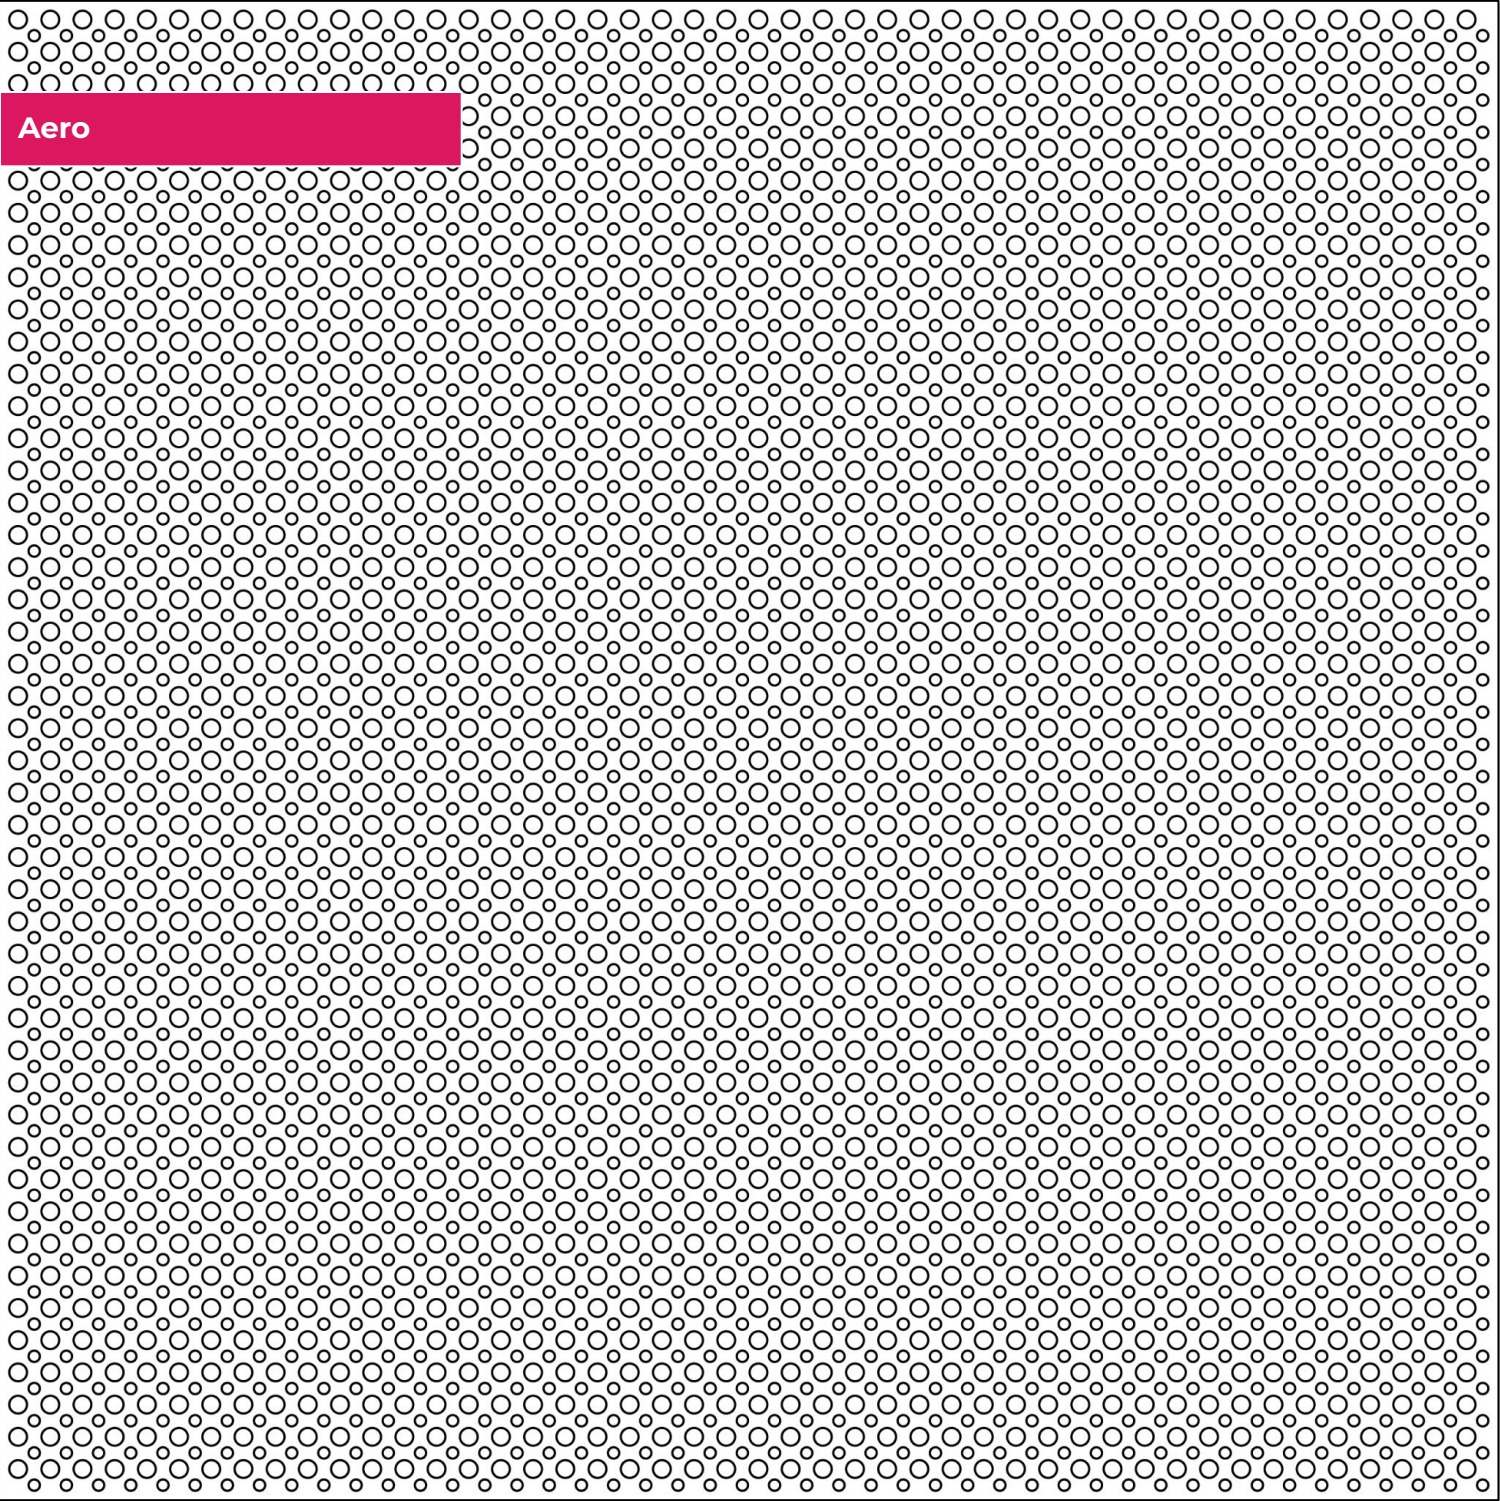


Thickness (mm)	Max Height (mm) *	Max Width (mm)
25	2500 - 3000	1100
50	2500 - 3000	1050

PERFORATED METAL ACOUSTIC PANELS.

Perf Variations

POSSIBLE PERFORATION DESIGNS

NOTE:
Variations in perforation patterns do not impact the acoustic performance of AbsorberLine® MF or EV panel systems. Regardless of the specific design chosen, these panels will deliver the same acoustic performance as the standard perforated design displayed above. It's important to note that the perforations are solely for aesthetic purposes

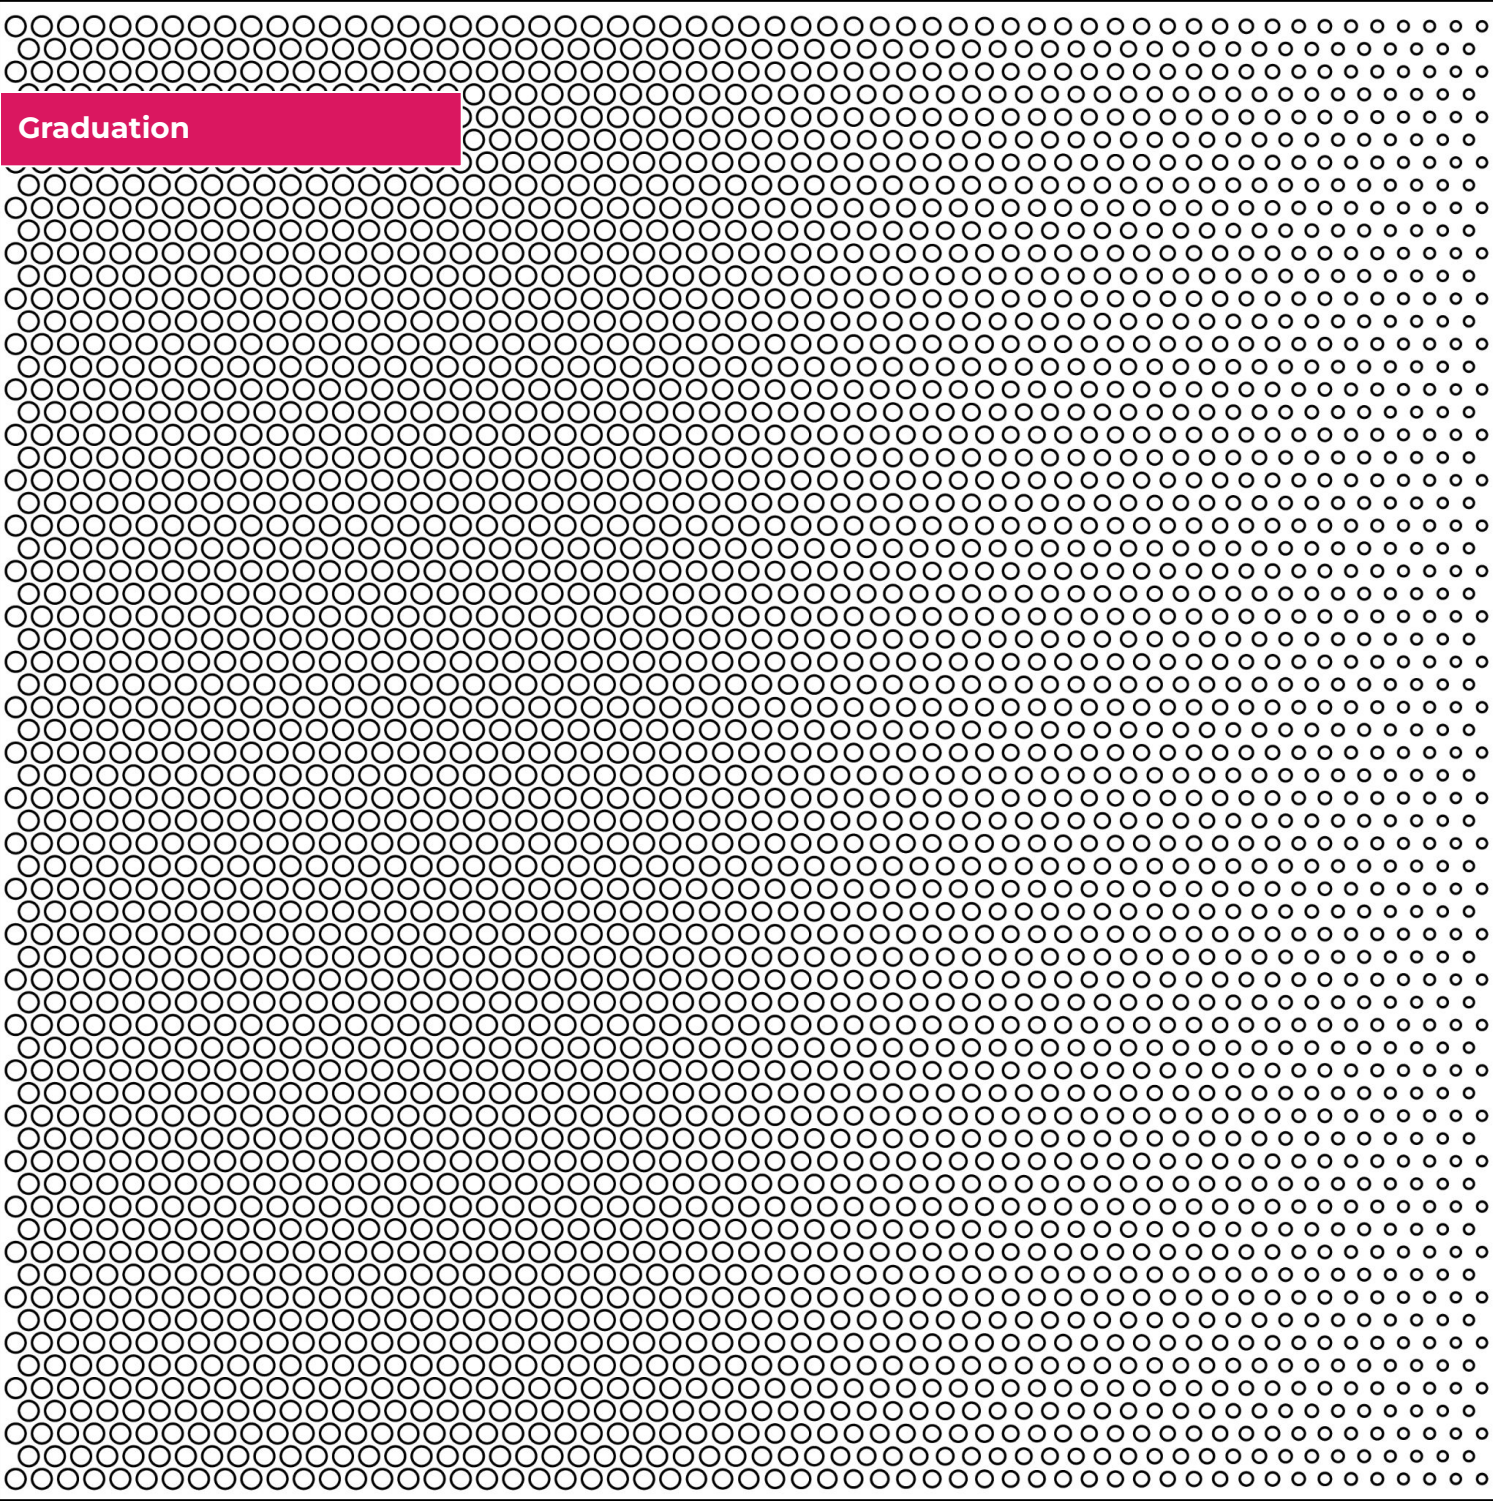


Thickness (mm)	Max Height (mm) *	Max Width (mm)
25	2500 - 3000	1100
50	2500 - 3000	1050

PERFORATED METAL ACOUSTIC PANELS.

Perf Variations

NOTE:
Variations in perforation patterns do not impact the acoustic performance of AbsorberLine® MF or EV panel systems. Regardless of the specific design chosen, these panels will deliver the same acoustic performance as the standard perforated design displayed above. It's important to note that the perforations are solely for aesthetic purposes

POSSIBLE PERFORATION DESIGNS

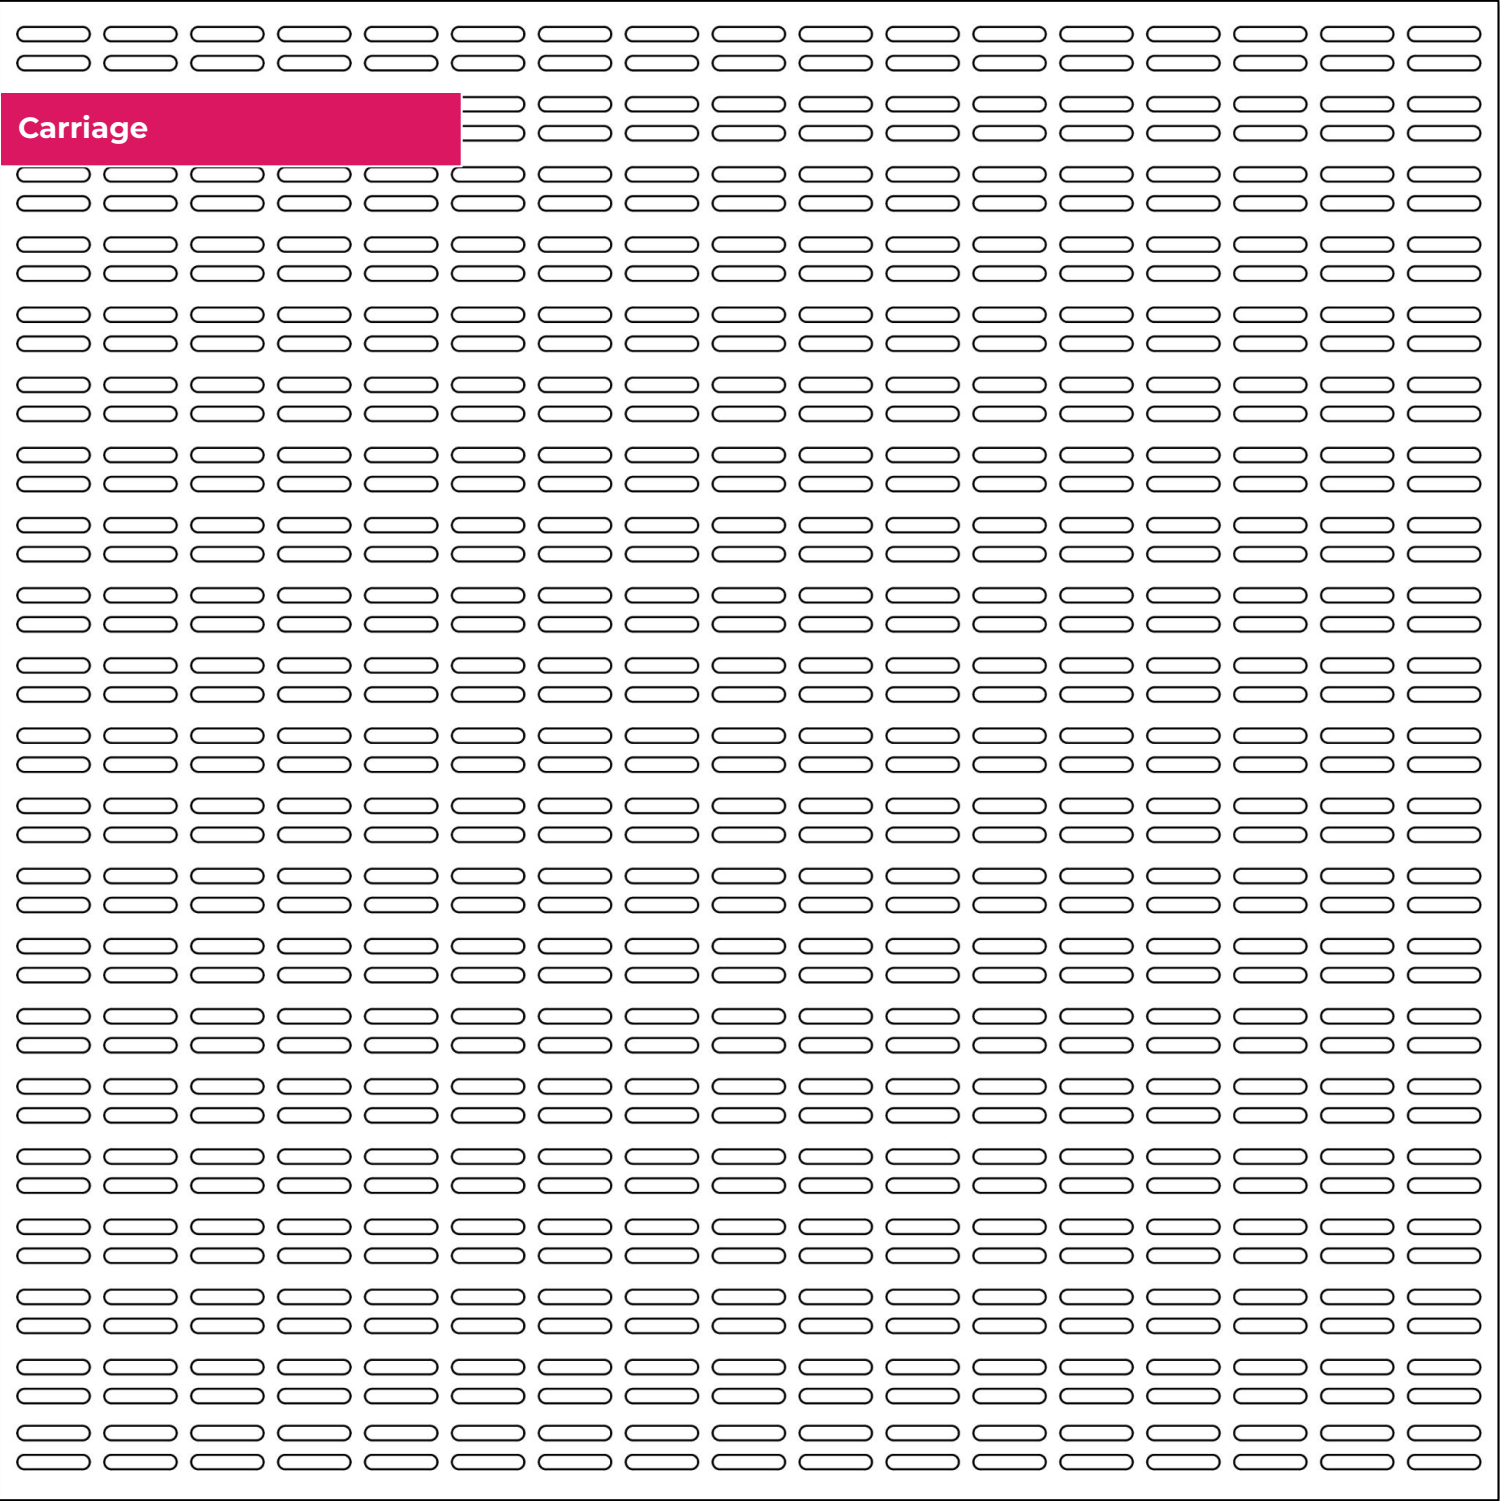


Thickness (mm)	Max Height (mm) *	Max Width (mm)
25	2500 - 3000	1100
50	2500 - 3000	1050

PERFORATED METAL ACOUSTIC PANELS.

Substructure

INSTALLATION OF CHANNEL SYSTEM

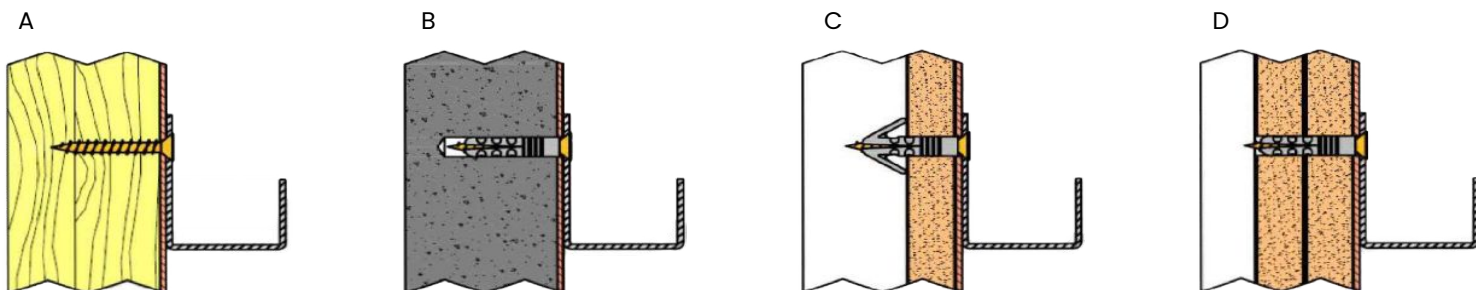

To begin your project, it's essential to make sure you have the right screws and rawl plugs that are suitable for the specific substrate mentioned earlier. Once you've gathered the correct fasteners, follow these steps:

Prepare Your Materials: Gather all the necessary tools and materials, including your chosen screws, rawl plugs, channels, and a reliable power drill.

Plan Your Layout: Before drilling any holes, carefully plan and mark the positions where you want to install the channels. Make sure the channels are level and appropriately spaced. This step ensures that your project will be aesthetically pleasing and functional.

Secure the Bottom Channel:


- Hold the bottom channel against the wall, aligning it with your marked positions.
- Use a level to ensure it's perfectly horizontal.
- When you're confident about the alignment, mark the holes for the screws on the wall through the holes in the channel.
- Carefully drill holes at the marked spots, ensuring you use the appropriate drill bit size for your rawl plugs (if required)
- Insert rawl plugs into the holes (if required)
- Place the bottom channel back against the wall and secure it by driving screws through the channel holes and into the rawl plugs (if required). Make sure it's firmly attached to the wall but avoid over tightening, which could damage the channel or wall.

Attach the Top Channel:

- Similarly, hold the top channel against the wall, aligning it with your marked positions.
- Use a level to ensure it's perfectly horizontal and parallel to the bottom channel.
- Once it's aligned, mark the holes for the screws on the wall through the holes in the top channel.
- Drill holes at the marked spots, ensuring you use the appropriate drill bit size for your rawl plugs (if required)
- Insert rawl plugs into the holes (if required)
- Place the top channel back against the wall and secure it by driving screws through the channel holes and into the rawl plugs(if required). Ensure it's firmly attached and level with the bottom channel.

Final Check and Adjustments:

- Double-check the alignment and levelness of both channels.
- Make any necessary adjustments to ensure they are perfectly parallel and at the desired height.
- Clean Up: Remove any excess dust or debris created during drilling.

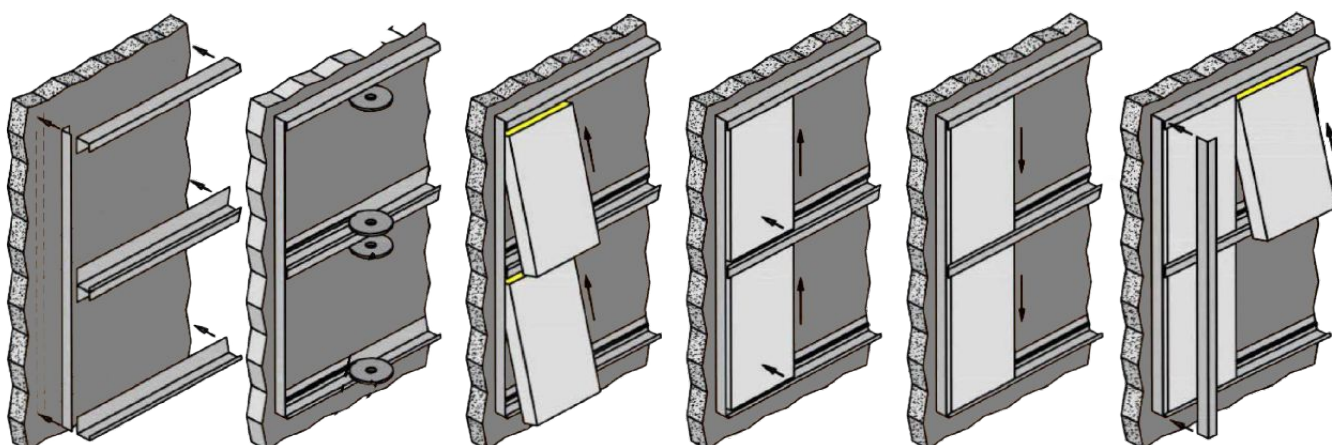

CHANNEL SYSTEM, INSTALLATION OF PANELS.

Panel Installation

Once the channels are securely fixed in place, the next step is to seamlessly integrate the AbsorberLine® panels into your installation. Follow these steps to ensure a smooth fit:

Prepare the Panels: Ensure that your AbsorberLine® panels are clean and free from any dust or debris. This will help maintain their performance and appearance.

Position the First Panel:

- A. Begin with the first panel that you wish to install.
- B. Carefully lift the panel and align it with the upper channel. The upper channel should provide a secure slot for the panel.
- C. Slide the panel gently into the upper channel, ensuring it fits snugly. Make sure it is level and flush with the channel.


Secure the Panel in the Bottom Channel:

- A. Allow the panel to descend naturally into the bottom channel. This will provide a stable foundation for the panel.
- B. Ensure that the panel is properly seated within the bottom channel, and there are no gaps or misalignments.

Repeat for Additional Panels: If your project requires multiple panels, continue this process for each subsequent panel. Carefully slot each panel into the upper channel and let it drop into the bottom channel until your entire installation is complete.

Check Alignment and Spacing: Periodically step back and check the alignment and spacing of the panels. Adjust as needed to maintain a uniform and visually pleasing installation. Closing off angles (optional) may be used to add a framed look. Pop-rivets can be used to lock all panels into position if required.

1. CHANNEL SYSTEM AS STANDARD

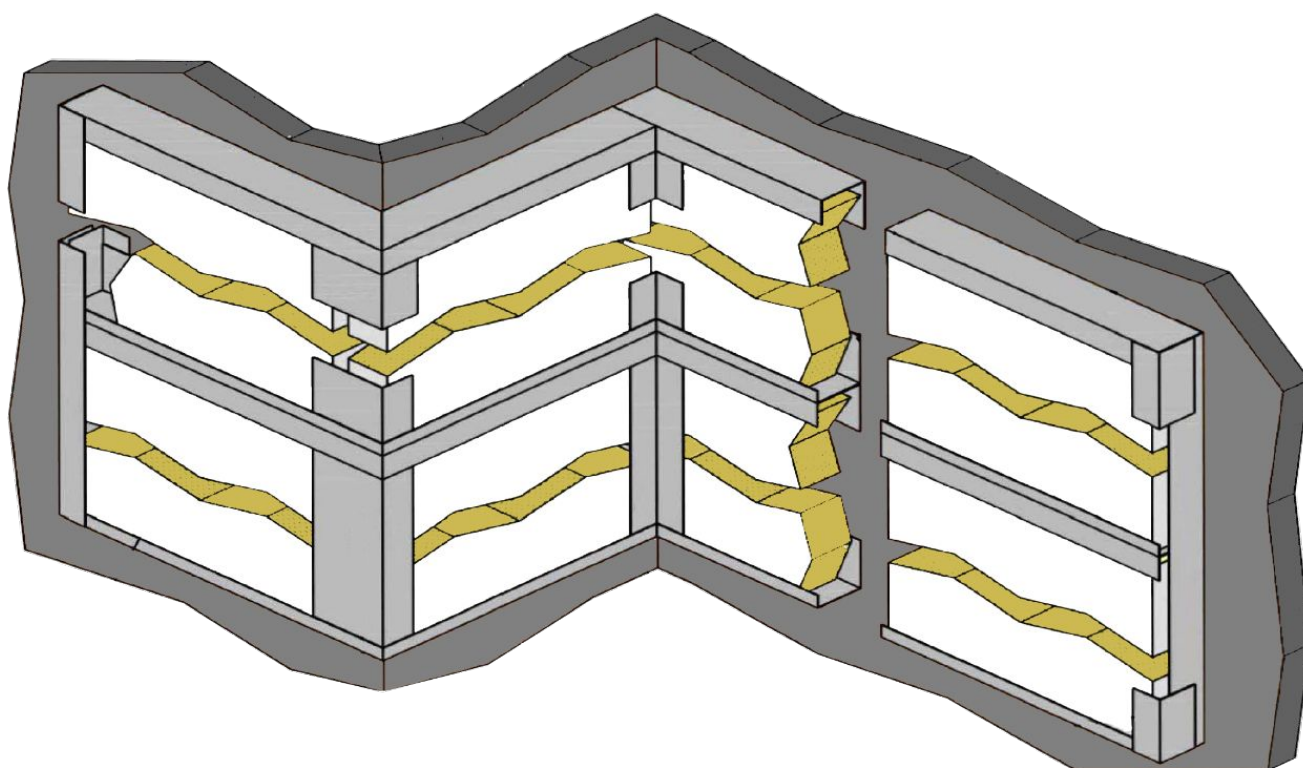

MODULAR SYSTEM, INSTALLATION OF PANELS.

Panel Installation

A template is provided to mark out the location of each 'L' shaped angle bracket to the wall or ceiling substrate. Each bracket has a threaded insert to one leg only. Please ensure the threaded part is NOT fixed to the substrate as this is solely for the panels to secure to. The next step is to securely integrate the AbsorberLine® Modular panels into your installation. Follow these steps to ensure a smooth fit:

Prepare the Panels: Ensure that your AbsorberLine® panels are clean and free from any dust or debris. This will help maintain their performance and appearance.

Position the First Panel:

- A. Mark out panel location(s) with the provided template.
- B. Drill and fix each angle bracket securely keeping square and true. 4Nr angle brackets per panel.
- C. Begin with the first panel that you wish to install.
- D. Carefully lift the panel and align it with the angle brackets, these brackets should simply slide inside the Absorberline® panel.


Secure the Panel in the Bottom Channel:

- A. Holding the panel firmly into position, locate and fasten the security bolts into position.
- B. Ensure that the panel is properly seated within the 'L' shaped brackets and there are no gaps or misalignments.

Repeat for Additional Panels: If your project requires multiple panels, continue this process for each subsequent panel. Using the temple provided, carefully align each panel onto each 'L' bracket configuration until your entire installation is complete.

Check Alignment and Spacing: Periodically step back and check the alignment and spacing of the panels. Adjust as needed to maintain a uniform and visually pleasing installation.

2. MODULAR PANEL WITH 'L' BRACKETS & SECURITY FIXINGS

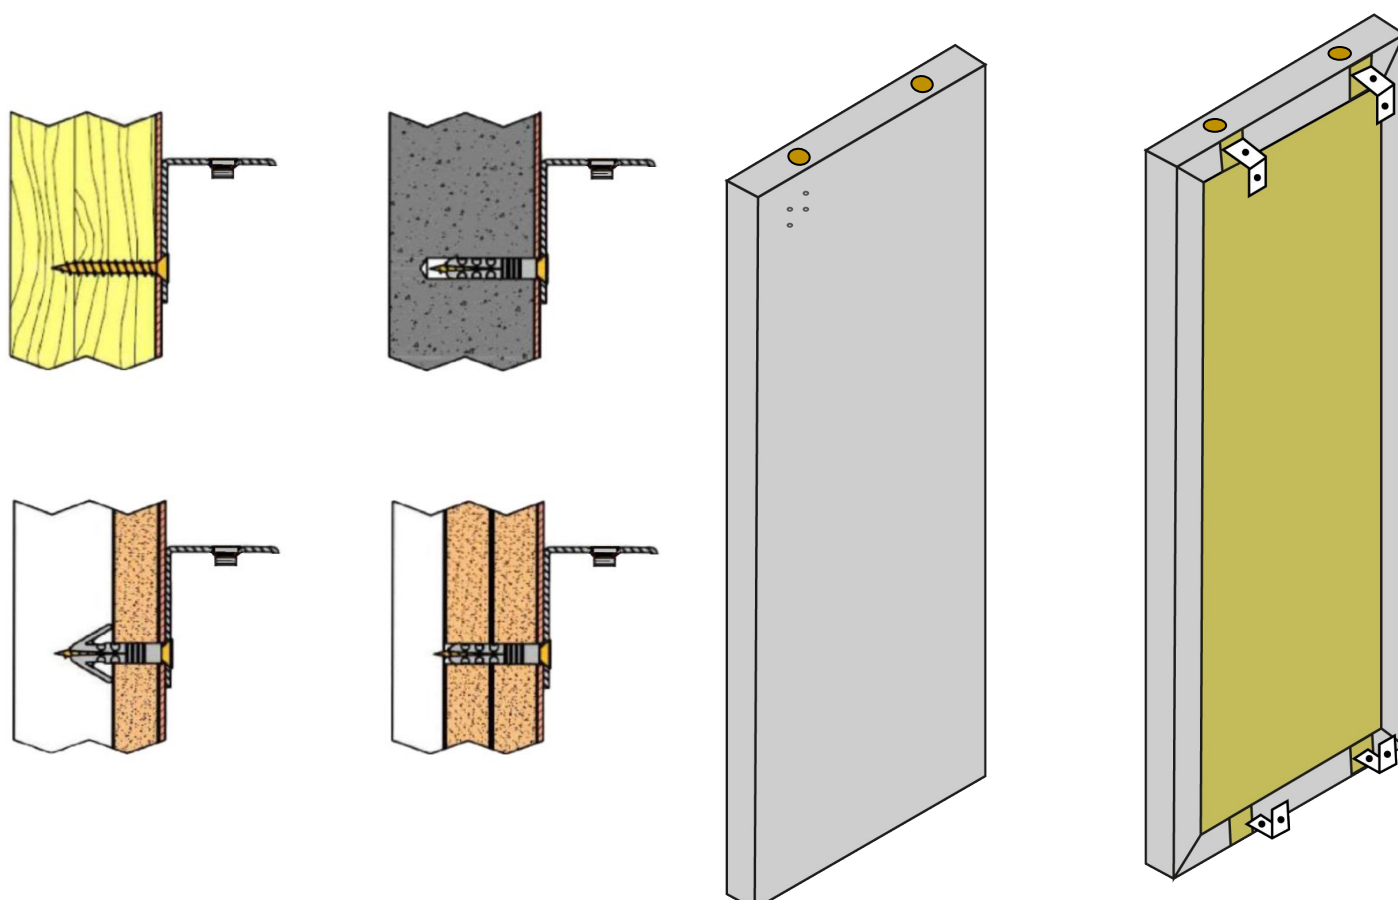



AbsorberLine®

Perforated Metal Acoustic Panels