



GHOST SEAL WATERPROOFER

DESCRIPTION:

Ghost Seal Natural Waterproofer penetrates and reacts to form a permanent bond that waterproofs concrete decks, driveways, sidewalks and concrete pavers. Reduces potential mold, mildew growth and protects from freeze/thaw damage. Available in gallons and 5 gallon pails.

ADVANTAGES:

- Natural finish. no sheen
- Water-based easy clean up
- Reacts to substrate wont peel
- Algae and Mold Inhibitor
- Reduces salt damage spalling
- VOC compliant <50g/L

APPROVED APPLICATIONS:

Brick
 Sandstone
 Concrete
 Block
 Exposed Aggregate
 Slate

Stadiums, Bridges and parking garages

SURFACE PREP: Must be bare unsealed

Pressure wash ensuring that surfaces are clean and free of oil, efflorescence, laitance or contaminants prior to beginning the sealing process. Let substrate dry out overnight before sealing. Substrate must be dry before sealing.

COVERAGE:

Apply sealer between 150 to 400 sq. ft. per gallon; however, this rate will vary depending on the texture and absorption rate of the concrete being sealed

APPLICATION INSTRUCTIONS:

Apply at temperatures between 50° F and 95° F. Apply when surface or ambient temperature is below 50°F. Don't apply if temperatures are expected to drop below freezing (32° F)

MIXING:

invert pail no additional mixing required

APPLICATION:

Using a 1/2' nap solvent roller OR pump-up sprayer uniformly apply a coat of Tru-Silane Waterproof. Apply second coat wet on wet. (Back rolling is recommended to eliminate puddling)

Professional Applications:

Tape all windows and screening using 2 mil plastic sheeting. Using an airless sprayer set pressure to 25-30 psi and fine .013 stain tip.





COATINGS SOLUTIONS
HIGH PERFORMANCE

Technical Data Sheet

3150 County Line Rd, STE 4
Lakeland, FL 33811

DRY TIME:

Tack free/foot traffic: 4-6 hrs.
Heavy foot traffic 48 hrs.
Vehicular Traffic 2 days.

MAINTENANCE:

After sealer has cured 30 days deck can be maintained using a mild detergent or deck wash.

Reseal every 3-5 years depending on exposure and traffic.

CLEANUP:


Immediately clean mixing blades with water

STORAGE:

Store at temps above 50F. If product freezes, it is no longer usable. Shelf life is 18 months.

WARRANTY:

Materials are free of defect. No labor

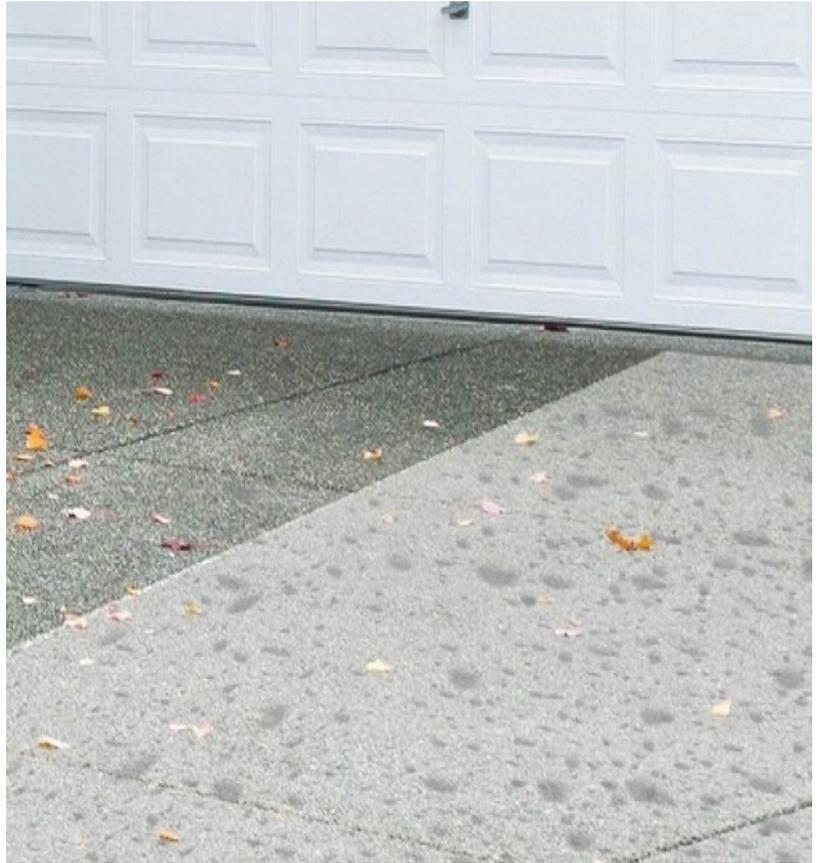

Remove Clean old Sealer