



SPECIFICATION

- 1050mm (42") wide EP500 3 Ply, 3mm+1.5mm Feeder Belt
- 1050mm (42") wide EP400 3 Ply, 4mm+2mm Incline Belt
- 15m (50ft) long incline conveyor.
- Hydraulic folding head section.
- 6.8m³ (8.9yds³) Hopper capacity (Optional 700mm extensions 11m³ (14.65m³).
- CAT 2.2 Turbo Water Cooled Engine, Power: 44.7 kW (59.9 Hp) @ 2200 Rpm.
- 2.9 metre FL 4 Crawler Tracks— 300mm shoes

ADVANTAGES

- Maximum distance between tracks and head drum, for optimum stockpiling capacity.
- Maximum lump feed size of up to 100mm (4").
- Front adjustable telescopic to obtain desired discharge height
- Engine protection shutdown system.
- Natural design of the hopper gives integral strength and stability in working position.
- Folding head section for ease of transport.
- Transports globally in 1 x 40ft High Cube Container.


OPTIONS INCLUDED

- Single Oil Cooler for warm climates
- U 68 Hydraulic Oil
- Upgrade to 2x hydraulic jacking legs at rear of hopper
- Upgrade to Return Roller Mesh Under Guards (painted RAL 1004)
- Grease lines to central point in lieu of grease cannisters




HF 10T HOPPER FEEDER

WORKING

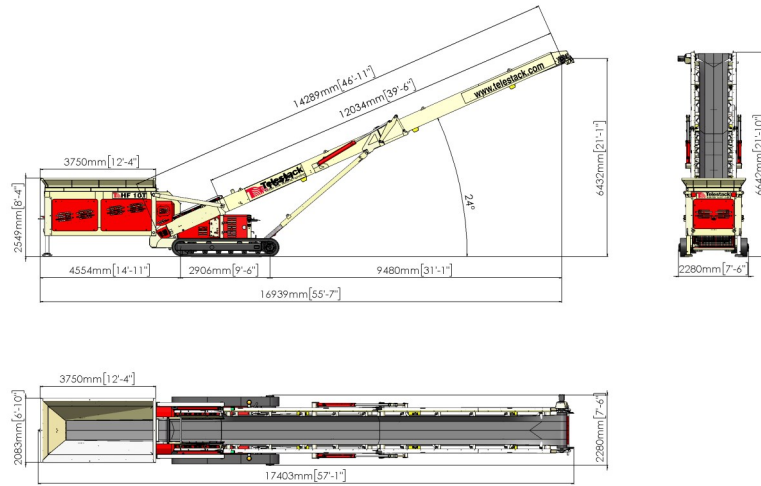


24° - FULLY RAISED

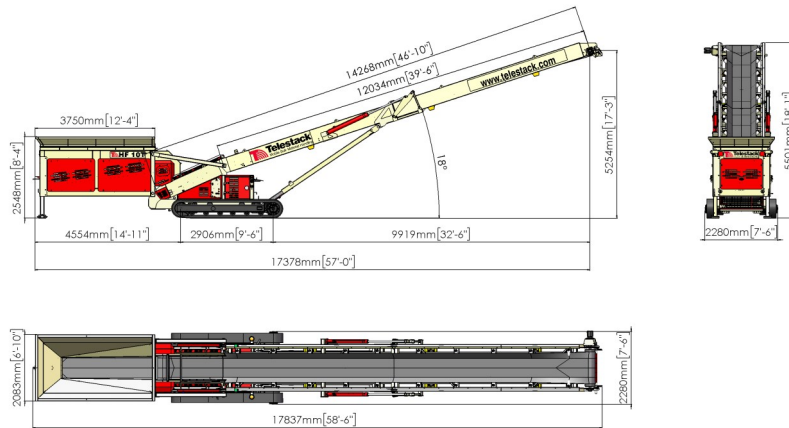



18° - OPERATIONAL

Stockpile Capacity	Stockpile Height		Stockpile Capacity			
	(m)	(ft)	(m3)	(yd3)	(Tonnes)	(Ton)
24°	6.42	20' 11"	488	638	780	860
22°	6.04	19' 8"	408	532	650	720
20°	5.62	18' 3"	330	430	525	580
18°	5.20	16' 11"	260	340	420	460
16°	4.76	15' 6"	232	302	370	410
14°	4.32	14' 1"	150	195	240	265
12°	3.88	12' 8"	110	145	175	190

TRANSPORT DIMENSIONS

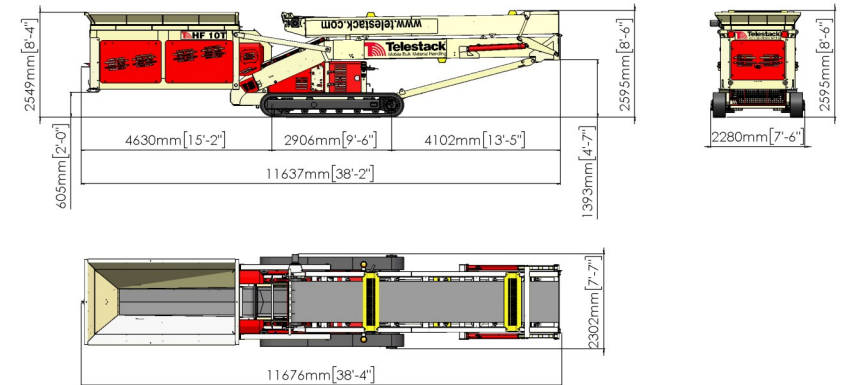

OPTION 1

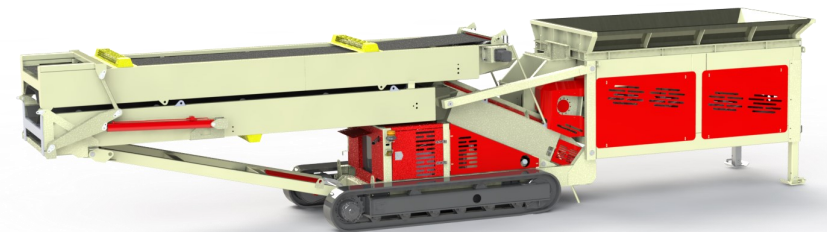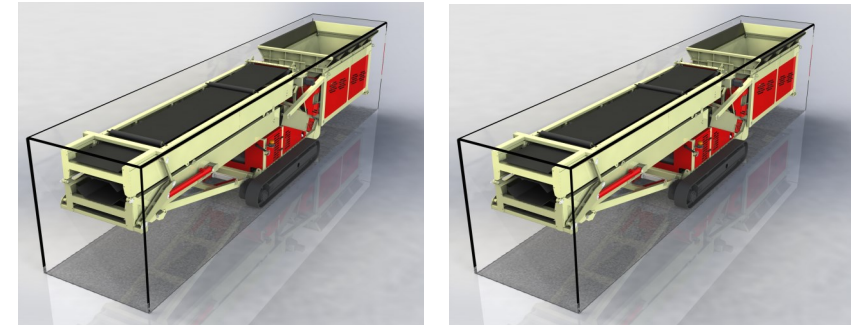

CONTAINERISATION

Transport Dimensions		Metric	Imperial
OPTION 1	Transport Length (Head Folded)	11.68m	37' 11"
	Transport Width	2.28m	7' 5"
	Transport Height (Head Folded)	2.54m	8' 3"
	Overall Weight	13,100 Kg	28,880 Lbs