



SPECIFICATION

- 1050mm (42") wide EP400 3 ply, 4mm + 2mm Belting
- 24m (80ft) Long conveyor
- Product up to 250mm (10")
- Hydraulic folding head section as standard
- Twin Conveyor drive for maximum power
- Discharge height up to 10.2m (34ft)
- Option heavy duty belting
- Standard Engine Options
- Up to 600TPH (660Ton) @ 18°

ENGINE OPTIONS

EU Stage IIIB/USA Tier 4

- Deutz TD 2.9 L04i, Electronic, 4 Cylinder, 50kW (68Hp) @ 2200 Rpm

Unregulated Countries

- CAT, C2.2 Turbo, 44.7kW (59.9Hp) @ 2200 Rpm Cooled, 34Kw (47 Hp) @ 2200 Rpm

EU Stage V USA Tier 4 Final

- CAT C2.2 50kW (68Hp) @ 2200 Rpm

ADVANTAGES


- Reduce on-site Material Handling
- Increase stockpile capacity by **95%** when compared to crusher/screener belt
- Reduced Operating Costs for **Fuel, Labour** and **Maintenance** when compared to Conventional Wheel Loaders
- **70%** Cheaper to Own/Operate when Compared with Wheel Loaders
- Transported Globally in **1x40ft** High Cube Container



TC 624 TRACKED CONVEYOR

WORKING DIMENSIONS


22°- OPERATIONAL

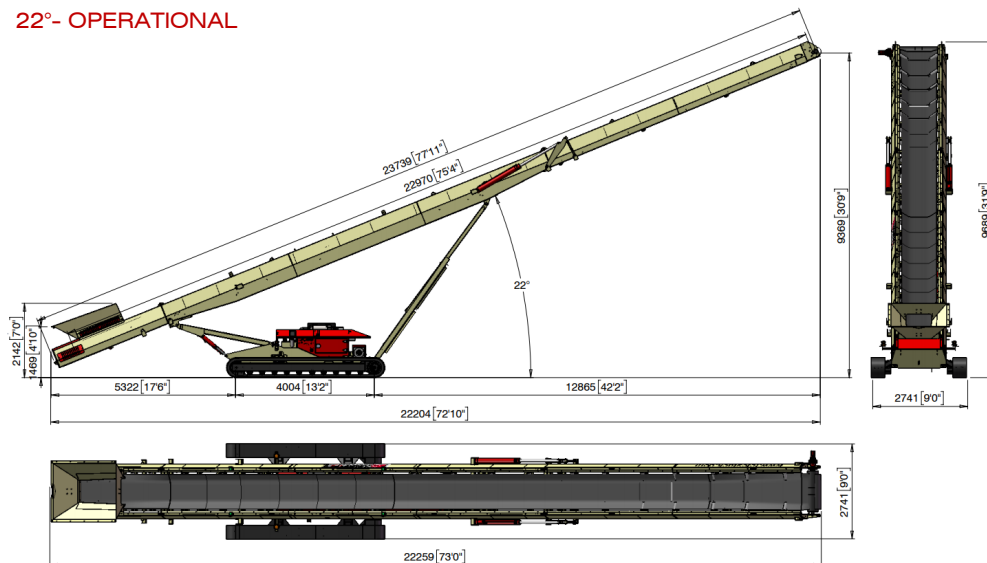


	Transport Dimensions	Metric	Imperial
OPTION 1	Transport Length (Head & Tail Folded)	12.01m	39' 5"
	Transport Width	2.74m	9' 0"
	Transport Height (Head & Tail Folded)	3.10m	10' 2"
OPTION 2	Transport Length (Head & Tail Folded)	12.22m	40' 1"
	Transport Width	2.74m	9' 0"
	Transport Height (Head & Tail Folded)	4.18m	13' 9"
OPTION 3	Transport Length (Head Folded)	15.35m	50' 4"
	Transport Width	2.74m	9' 0"
	Transport Height (Head Folded)	3.12m	10' 8"
	Overall Weight	14,280 Kg	31,482 Lbs

Stockpile Capacity	Stockpile Height		Stockpile Capacity			
	(m)	(ft)	(m3)	(yd3)	(Tonnes)	(Ton)
22°	9.82	31' 11"	1,746	2,284	2,794	3,080
20°	9.22	29' 11"	1,445	1,891	2,313	2,549
18°	8.6	28'	1,173	1,534	1,877	2,069
16°	7.98	26'	937	1,226	1,499	1,653
14°	7.36	23' 11"	735	962	1,176	1,297
12°	6.74	21' 11"	565	739	903	996


TRANSPORT DIMENSIONS

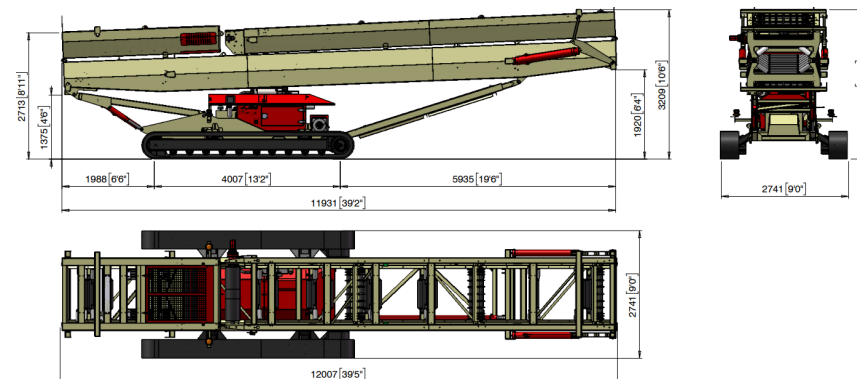

OPTION 1 - HEAD & TAIL FOLDED (FEEDBOOT REMOVED)

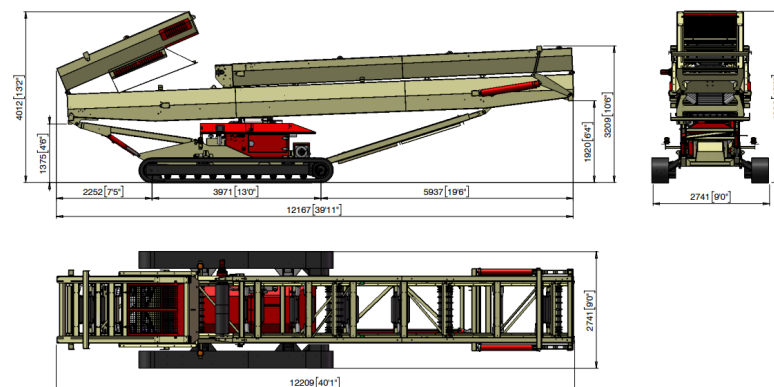

OPTION 2 - HEAD & TAIL FOLDED

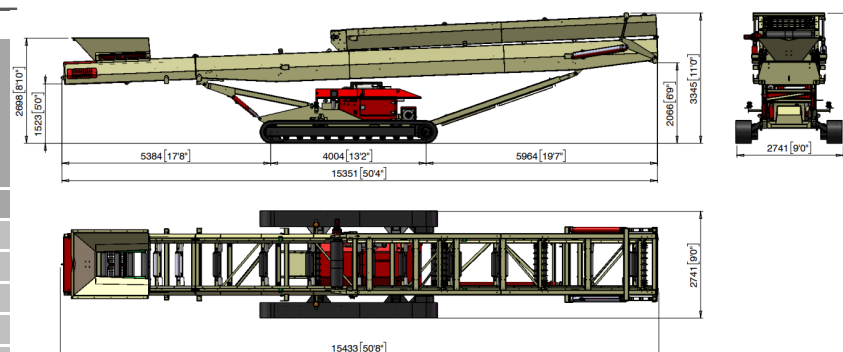

OPTION 3 - HEAD ONLY FOLDED



+44 (0) 2882 251100
Sales@telestack.com