



SPECIFICATION

- 1050mm (42") wide EP400 3 ply, 4mm + 2mm Belting
- 24m (80ft) Long conveyor
- Discharge height up to 11m (36ft)
- Hydraulic Folding Head Section
- Hydraulic Raise/Lower Conveyor
- Twin Conveyor drive for maximum power
- Throughput up to 600tph (660 Ton) @ 18°
- CAT C4.4 Mechanical, Water Cooled, Power: 75Kw (100Hp) @ 2200 Rpm
- FL 4 x 1.8 metre Tracks

ADVANTAGES

- Reduce on-site Material Handling
- Increase stockpile capacity by 4500% (120°) when compared to crusher/ screener belt
- Reduced Operating Costs for Fuel, Labour and Maintenance when compared to Conventional Wheel Loaders
- 70% Cheaper to Own/Operate when Compared with Wheel Loaders
- Transported Globally in 1x40ft High Cube Container
- Hydraulic folding head section allowing for compact road transportation
- Hydraulic tail section height adjustment whilst at the same time maintaining head drum height ensuring maximum stockpile capacity.

OPTIONS INCLUDED

- Type 68 Hydraulic Oil
- Upgrade to Return Roller Mesh Under guards (painted Sunflower Yellow)
- Pinned Front and Rear Telescopic Trestles
- Grease lines to central point in lieu of grease cannisters
- Tyres upgraded too low ground pressure for poor ground conditions. 550mm wide tyres




TC 624R

TRACKED CONVEYOR

WORKING DIMENSIONS

18°- OPERATIONAL

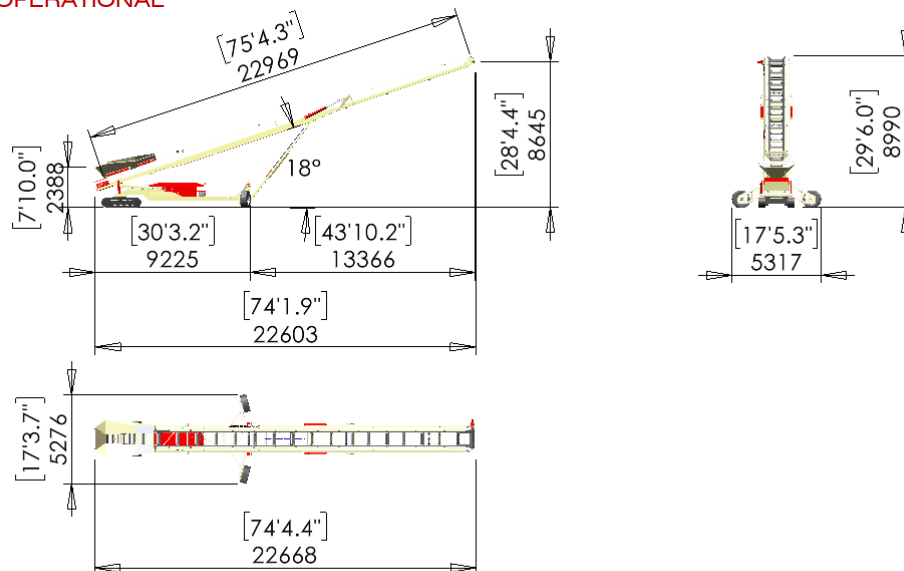


WORKING STOCKPILE CAPACITIES

Angle of Con- veyor Belt (Degrees)	Stockpile Height		Stockpile Capacity (Volume)		Stockpile Capacity (Mass)	
	(m)	(ft)	(m3)	(yd3)	(Tonnes)	(Ton)
0°	9.69	31' 6"	1,678	2,195	2,685	2,959
90°	9.69	31' 6"	5,763	7,537	9,220	10,164
120°	9.69	31' 6"	7,124	9,318	11,399	12,565
180°	9.69	31' 6"	9,848	12,880	15,756	17,368

Angle of Con- veyor Belt (Degrees)	Stockpile Height		Stockpile Capacity (Volume)		Stockpile Capacity (Mass)	
	(m)	(ft)	(m3)	(yd3)	(Tonnes)	(Ton)
24°	11.12	36' 2"	2,536	3,317	4,057	4,472
18°	8.96	29' 1"	1,327	1,735	2,122	2,340
12°	6.73	21' 10"	562	735	899	991


TRANSPORT DIMENSIONS

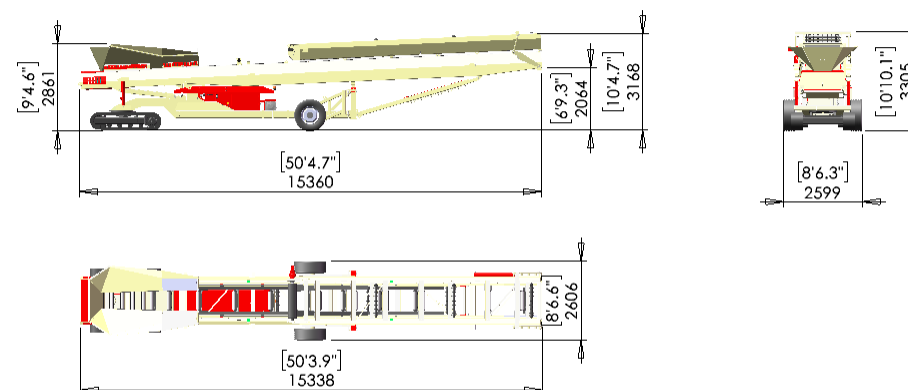

TRANSPORT DIMENSIONS HEAD FOLDED

	Metric	Imperial
Transport Length (Head Folded)	15.36m	50' 4"
Transport Width	2.59m	8' 6"
Transport Height (Head Folded)	3.16m	10' 4"
Overall Weight	16,000 Kg	35,274 Lbs

180 DEGREES STOCKPILE DIMENSIONS

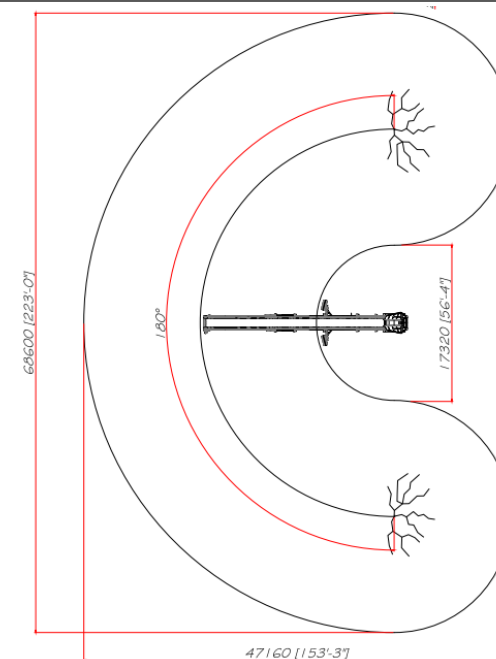

+44 (0) 2882 251100
Sales@telestack.com