



SPECIFICATION

- 1050mm (42") wide EP400 3 ply, 4mm + 2mm Belting
- 24m (80ft) Long conveyor
- Throughput up to 400tph (440 Ton) @ 18°
- Hydraulic folding head section as standard
- Discharge height up to 10.2m (34ft)
- Option heavy duty belting
- Paint specification, Cream: RAL 7032, Red: RAL 3001
- CAT 2.2 Turbo Water Cooled Engine, Power: 44.7 kW (59.9 Hp) @ 2200 Rpm.
- 4.0 metre FL4 Crawler Tracks - 400mm shoes

ADVANTAGES

- Reduce on-site Material Handling.
- Increase stockpile capacity by 95% when compared to crusher/screener belt.
- Reduced Operating Costs for Fuel, Labour and Maintenance when compared to Conventional Wheel Loaders.
- 70% Cheaper to Own/Operate when Compared with Wheel Loaders.
- Transported Globally in 1x40ft High Cube Container.
- Folding head and tail section for ease of transport .
- Front and rear adjustable telescopic to obtain desired discharge or feed in height.

OPTIONS INCLUDED


- Type 68 hydraulic oil.
- Hydraulic folding tail section.
- Upgrade to return roller mesh under guards (painted RAL 1004).
- Oil Cooler.
- Grease lines to central point in lieu of grease cannisters.



TC 424X TRACKED CONVEYOR

WORKING DIMENSIONS


22°- OPERATIONAL

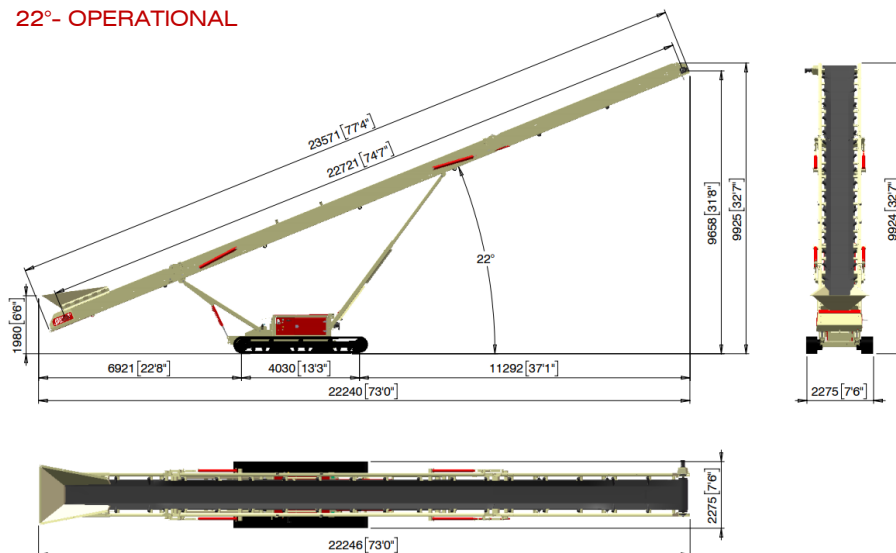


Transport Dimensions		Metric	Imperial
OPTION 1	Transport Length (Head & Tail Folded)	12.26m	39' 10"
	Transport Width	2.28m	7' 5"
	Transport Height (Head & Tail Folded)	2.58m	8' 5"
OPTION 2	Transport Length (Head & Tail Folded)	12.40m	40' 4"
	Transport Width	2.28m	7' 5"
	Transport Height (Head Folded)	3.10m	10' 2"
OPTION 3	Transport Length (Head Folded)	17.02m	23' 11"
	Transport Width	2.25m	7' 5"
	Transport Height (Head Folded)	2.67m	8' 8"
Overall Weight		13,600 Kg	29,542 Lbs

Stockpile Capacity	Stockpile Height		Stockpile Capacity			
	(m)	(ft)	(m3)	(yd3)	(Tonnes)	(Ton)
22°	9.82	31' 11"	1,746	2,284	2,794	3,080
20°	9.22	29' 11"	1,445	1,891	2,313	2,549
18°	8.60	28'	1,173	1,534	1,877	2,069
16°	7.98	26'	937	1,226	1,499	1,653
14°	7.36	23' 11"	735	962	1,176	1,297
12°	6.74	21' 11"	565	739	903	996


TRANSPORT DIMENSIONS

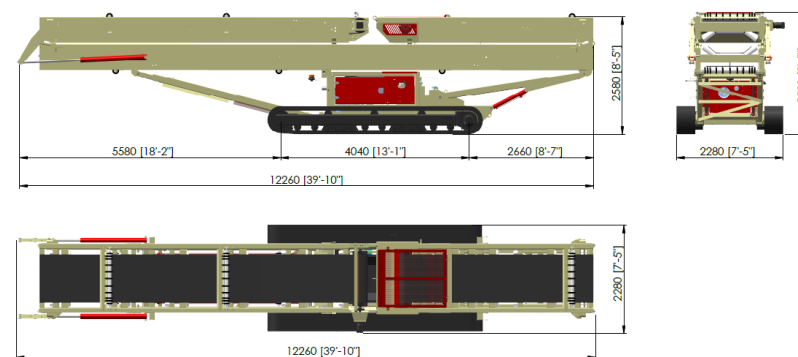

OPTION 1 - HEAD & TAIL FOLDED (FEEDBOOT REMOVED)

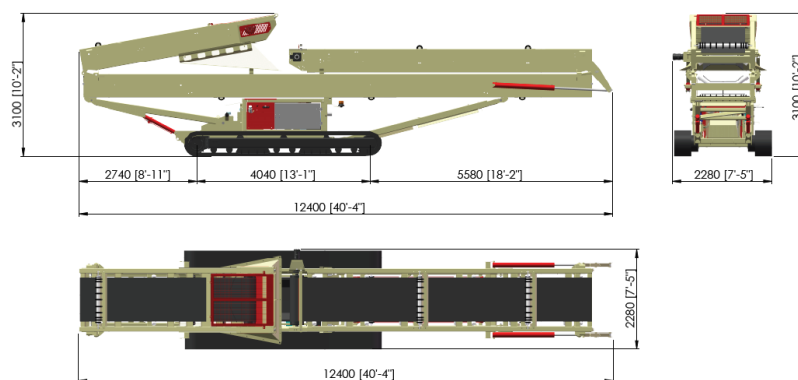

OPTION 2 - HEAD & TAIL FOLDED

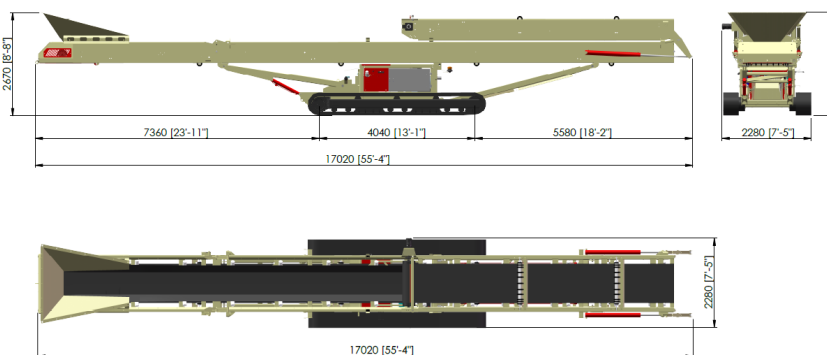

OPTION 3 - HEAD ONLY FOLDED