



SPECIFICATION

- 1050mm (42") wide EP 500 3 Ply, 5mm+1.5mm feeder Belting
- 1050mm (41") wide EP 500 3 ply, 5 +1.5mm feeder belt-ing, feeding onto 1050mm (42") incline belt.
- 12.3m (40ft) long incline conveyor
- 7m³ Standard Hopper capacity (Optional 500mm-10m³/700mm extensions - 13m³)
- Production rates of up to 300 TPH (330 Ton/Hr)
- Twin Internal planetary drive motors for high torque output
- Tier 3 - CAT C4.4 ACERT, Water Cooled, Power: 96.6Kw (130Hp) @ 2200 Rpm
- 4.0 metre FL4 Crawler Tracks - 400mm shoes

ADVANTAGES

- Front adjustable telescopic to obtain desired discharge height
- Engine protection shutdown system
- Twin rotor Pugmill with proven design, incorporating direct hydraulic drive, mesh gears for rotors, and removable paddles
- Natural design of the Pugmill gives integral strength and stability in working position.
- High specification machine designed for ease of maintenance commanding an excellent resale value at project conclusion.
- Heavy duty design and manufacture.


OPTIONS INCLUDED

- Hopper upgraded to 500mm (20") extension 9m³ (12yd³).
- Twin Drive on Feeder Conveyor
- Vertical split hopper plate to allow got 2 types of material to be fed into hopper included dual variable height outlet door
- Guide rollers at head and tail of incline to restrict belt wader
- Basket guards on incline conveyor return rollers
- Centralised greasing of hopper, incline and pug-mill bearings
- Upgrade to 2x hydraulic jacking legs at rear of hopper
- Dual oil cooler for warm climates
- Cement in Feed Box at Transfer point from Hopper to Incline




TELE-MIX® P2000T TRACKED PUGMILL

Pugmill @ 4 Degrees

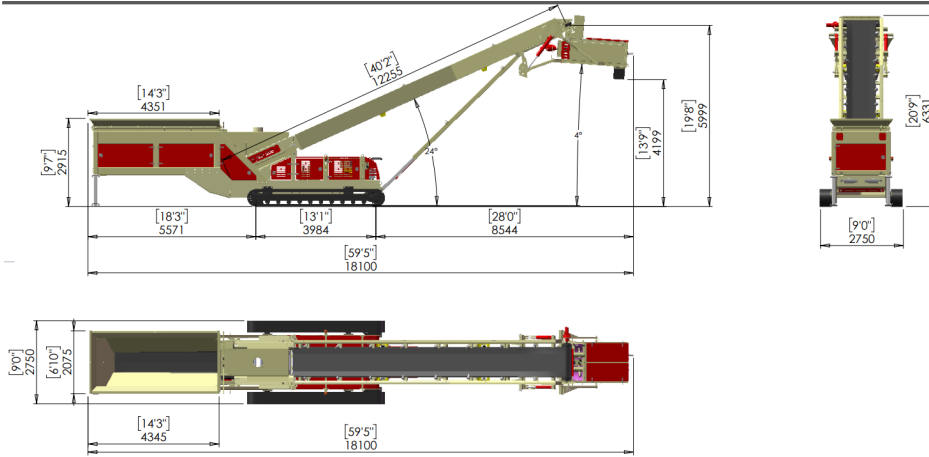



Pugmill @ 8 Degrees

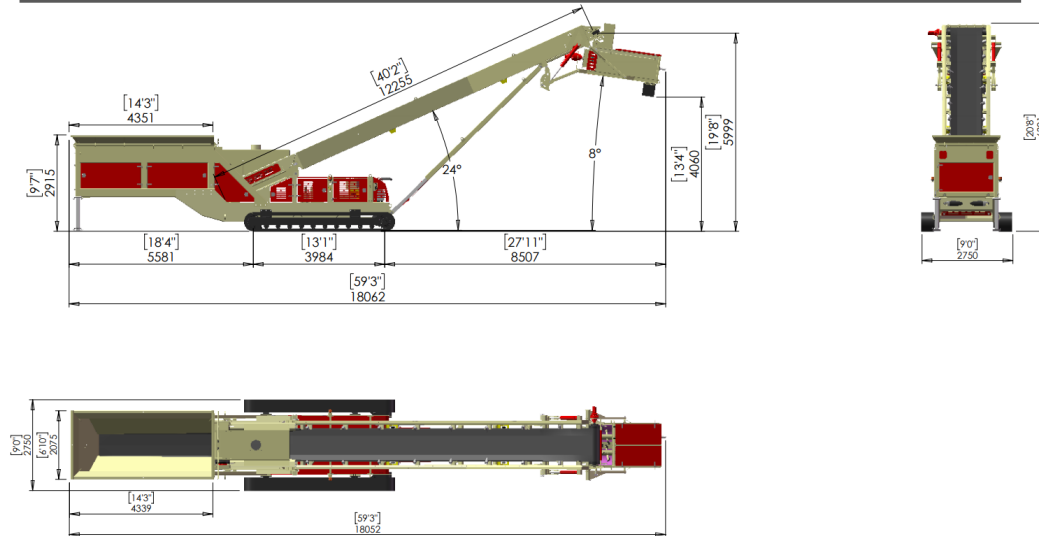

Discharge Heights

TELEMIX P2000T Conveyor Angle	Discharge Height		Working Length	
	(m)	(ft)	(m)	(ft)
24°	6.00	19' 8"	18.12	58' 4"
22°	5.68	18' 6"	18.24	59' 3"
20°	5.36	17' 7"	18.32	59' 7"
18°	4.70	15' 5"	18.40	59' 10"

TRANSPORT DIMENSIONS

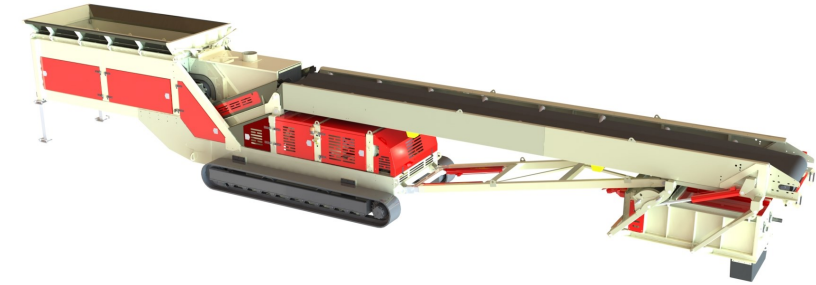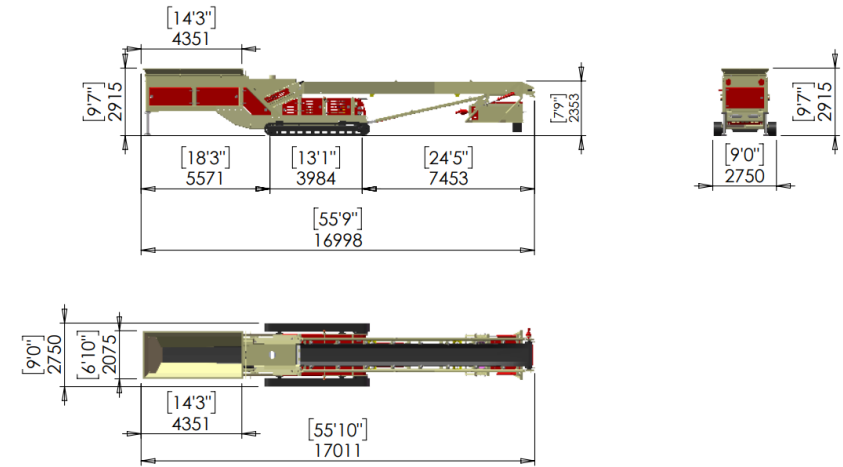

Transport Dimensions		Metric	Imperial
OPTION 1	Transport Length	16.99m	55' 9"
	Transport Width	2.75m	9' 0"
	Transport Height	2.92m	9' 7"
	Overall Weight	17,500 Kg	38,581 Lbs

Hopper Capacities

TELEMIX P2000T Hopper Extensions	Hopper Capacity		Heaped Capacity	
	(m³)	(yds³)	(m³)	(yds³)
300mm (Std)	6.1	7.98	7.02	9.18
500mm	8.02	10.5	9.22	12.06
700mm	10.3	13.47	11.85	15.5