

2 PC Class 150 Flanged Ball Valve (½" – 4")

PN10 Flange Diameter

VB2F: Class 150 with PN10/16 Flange

FULL BORE

FACE TO FACE: ANSI B16.10

ISO 5211 ACTUATOR MOUNTING FLANGE

FLANGE: PN16 DIN2633

ANTI STATIC DEVICE & BLOW OUT PROOF STEM

FIRE SAFE DESIGN

TESTING TO API 598




LOCKING DEVICE

SEAT/SEAL: 15% REINFORCED GLASSFIBER PTFE

TEMP RANGE -20 – 200 DEG C



NO	PART NAME	MATERIALS		
1	BODY	CF8M	CF8	WCB
2	CAP	CF8M	CF8	WCB
3	BALL	S/S 316	S/S 304	S/S 304
4	STEM	S/S 316	S/S 304	S/S 304
5	GASKET	15% GLASS FILLED PTFE		
6	SEAT	15% GLASS FILLED PTFE		
7	THRUST WASHER	PTFE		
8	PACKING	PTFE		
9	GLAND	S/S 304		
10	STEM WASHER	S/S 304		
11	STEM NUT	S/S 304		
12	HANDLE	S/S 304		
13	BOLT	S/S 304		
14	PLASTIC COVER	PLASTIC		

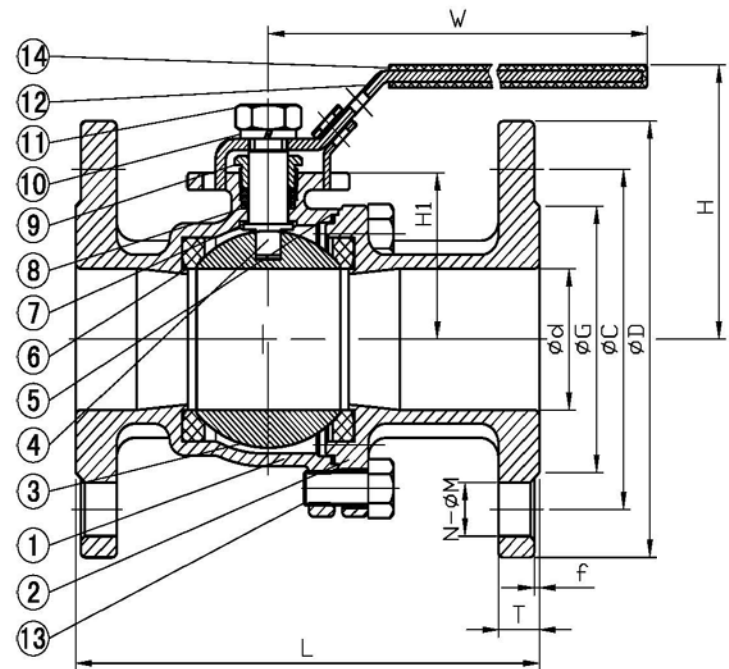

DIMENSIONS

SIZE	d	D	C	G	f	T	N	M	L	H	H1	K	ISO 5211	Ma	W	KGs
½"	15	95	65	46	2	14	4	14	108	72	27.7	36	F03	M5	123	2.5
¾"	20	105	75	56	2	16	4	14	117	76	32.1	36	F03	M5	123	3
1"	25	115	85	65	2	16	4	14	127	90	39.3	42	F04	M5	152	4.5
1 ¼"	32	140	100	76	2	18	4	18	140	95	44.5	42	F04	M5	152	5.7
1 ½"	38	150	110	84	3	18	4	18	165	97	50	70	F07	M8	182	7
2"	50	165	125	99	3	20	4	18	178	105	58.7	70	F07	M8	182	10
2 ½"	65	185	145	118	3	20	4	18	190	166	99	70/102	F07/F10	M10	285	14
3"	80	200	160	132	3	20	8	18	203	176	109	70/102	F07/F10	M10	285	18
4"	100	220	180	156	3	20	8	18	229	189	122	70/102	F07/F10	M10	285	26