

**COOL
TECHNOLOGY**

Technologies for the Environment

CT-200

Deployable portable lighting in one
bespoke robust package.

Portable
Light
Tower

Tel: +44 (0) 1379 658721
cool-tech.co.uk



LIGHTER, BRIGHTER, FASTER DEPLOYMENT

Unfolding or folding the CT-200 takes just two steps, in under 10 seconds.



Secure the lamp at any height with the buckle.


One keys to release tripod.



Optional ground pegs are available to secure the lighthouse, providing wind and vibration resistance.




HUMANIZED DESIGN HIDDEN IN THE DETAILS

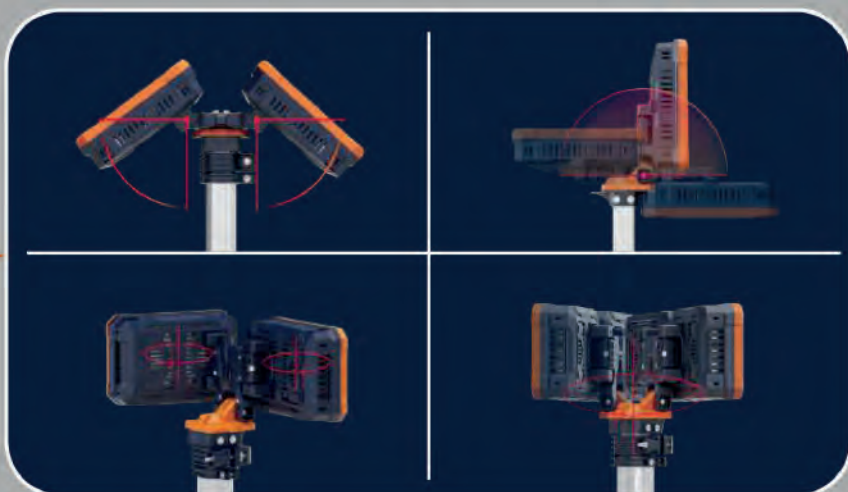

USB Output

Dual rainproof USB outputs for charging two devices at once, rain or shine.

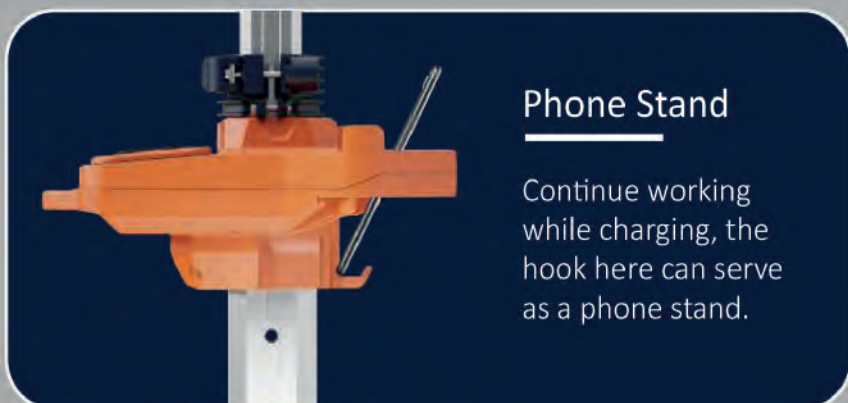

Phone Stand

Continue working while charging, the hook here can serve as a phone stand.



Stepless Dimming

Plug the driver into the rainproof port to unlock maximum brightness and stepless dimming.

Ultra-long Endurance

Standard Mode Up To **8+** Hours
(CT-D24-100 & Dual-head Version)

2 type of battery packs with different capacities have same contact slot.



CT-D24-54

Typical working hours 22 hours on
CT-200 Eco mode.



CT-D24-100


Doubled typical working hours to
45 hours.

Two Options Available Single Head Or Brighter Dual-head Version



▪ Dual-head

AC	0-11,000LM Stepless Dimmable	
Battery (4 Mode)	Turbo	5,000LM
	Standard	3,000LM
	Balanced	1,800LM
	Eco	500LM

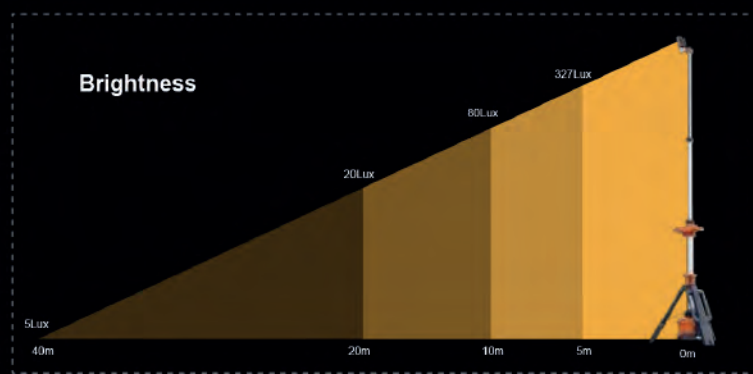

* 'Brightness' represents the center point illuminance value of the lighting direction

▪ Single Head

Battery (4 Mode)	Turbo	3,000LM
	Standard	2,000LM
	Balanced	1,200LM
	Eco	350LM

**COOL
TECHNOLOGY**
Technologies for the Environment

AC Powered

Up To **11,000** LM

Battery-powered

Up To **5,000** LM





Construction



Maintenance



Infrastructure



Camping



Railway



Mining



Emergency



Sport

One person operation

Less than 6Kg exclude battery.

**COOL
TECHNOLOGY**
Technologies for the Environment



1.0m



2.3m



Specifications


CT-200 Dual head

Height	1m~2.3m
Weight	6.3Kg (Fitting only)
Power Supply	D24 series battery pack / AC 100-277V
Lumens	0 - 11,000Lm
Run Times	>8 hours (Standard mode, D24-100)
IP Grade	IP65
Output(USB)	5V 2A (2 Dock)

CT-200 Single head

Height	1m~2.3m
Weight	5.9Kg (Fitting only)
Power Supply	D24 series battery pack
Lumens	0 - 3,000Lm
Run Times	>8 hours (Standard mode, D24-100)
IP Grade	IP65
Output(USB)	5V 2A (2 Dock)

Size (mm)

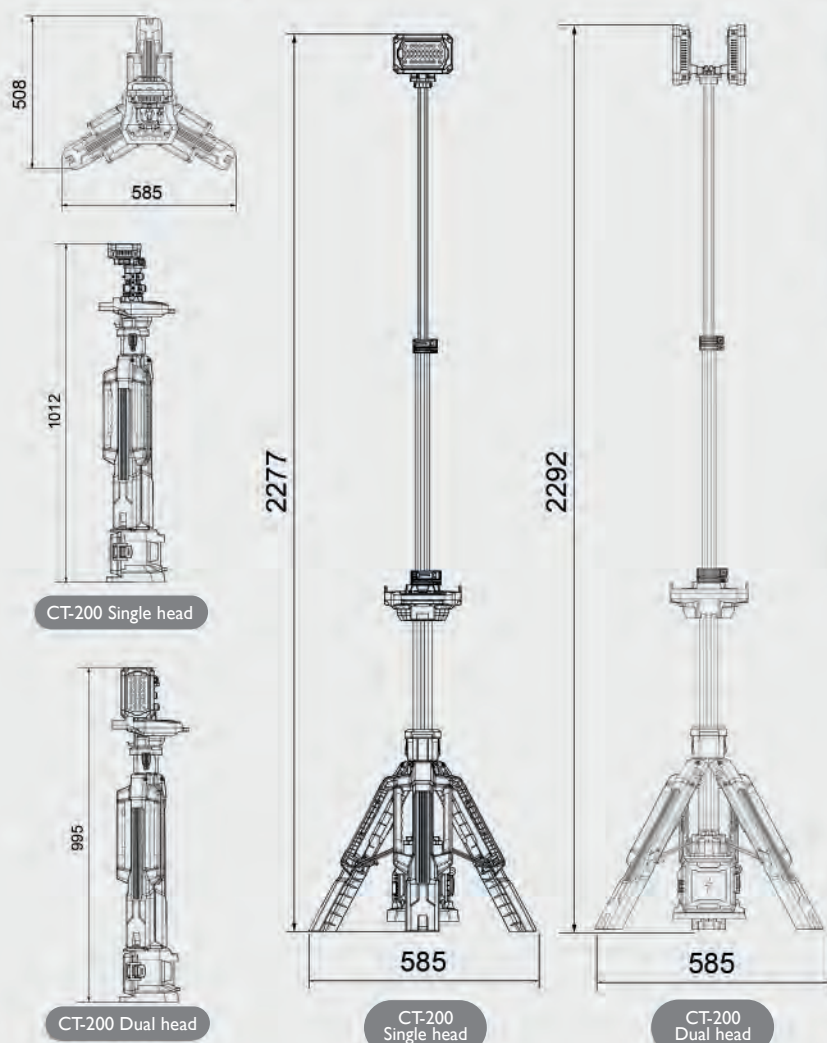

Package

Model	CT-200 Single head	CT-200 Dual head
Size of Carton	1070x240x300mm	1070x240x300mm
Gross Weight of Carton	7.2KG±5%	7.6KG±5%
PCS/Carton	1	1

