


TECHNICAL SPECIFICATIONS

DEVICE: lotus® PRO V9 | **SOLUTION:** Stabilized Aqueous Ozone (SAO®)

The **lotus® PRO V9** uses patented technology to convert tap water into **Stabilized Aqueous Ozone (SAO®)**: a simple, safe, sustainable alternative to traditional cleaners.

Dispense SAO into spray bottles, mop buckets, floor scrubbers, or carpet extractors for cleaning, disinfecting, and deodorizing.

With **IoT integration**, lotus PRO V9 sends data to the **iClean Dashboard**, allowing users to track usage and sustainability insights in real time.

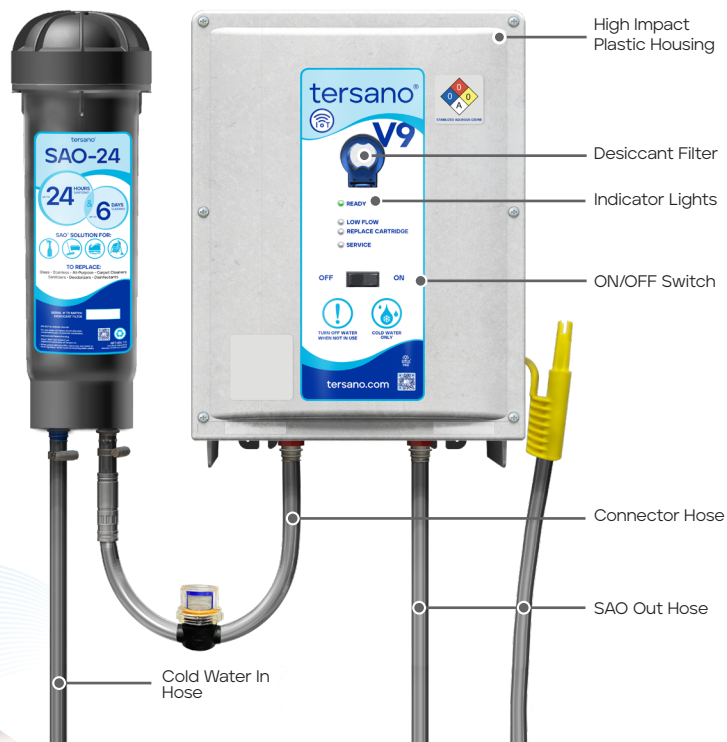

lotus® PRO V9		Cartridge	SAO-4	SAO-24
Model Number	LQFC225 (NA) LQFC275 (International)	Model Number	LCA114K-FB	LCA118K-FB
Dimensions	57 x 47 x 25 cm (22 ½" x 18 ½" x 10")	Disinfecting	4 Hours	24 Hours
Net Weight	11.3 kg (25 lbs)	Cleaning	3 Days	6 Days
Flow Rate	Up to 11.5 lpm (3 gpm)	Cartridge Life	5,000 Liters (1,325 Gallons)	3,000 Liters (800 Gallons)
O ₃ Concentration	Up to 1.7 ppm	Dimensions	49 x 18 x 21 cm (19 ¼" x 7 ¼" x 8 ¼")	49 x 18 x 21 cm (19 ¼" x 7 ¼" x 8 ¼")
Power	Standard 110V & 220V 110 watts	Weight	7.5 kg (16.5 lbs)	7.5 kg (16.5 lbs)
Water Temperature	4-40 °C (39-104 °F)			
Water Quality	Clean, TDS 60-200 ppm			
Wi-Fi Network	2.4 GHz			
Backflow	Built-in mechanical backflow prevention			
Automatic Shut Off	30 minutes			

US and International Patents Pending.
lotus®, SAO®, and tersano® are registered trademarks of Tersano Inc.

