


HYDRASTX® Servo Installation Instructions

Installing Servo Mounting Bracket


- 1) Remove hydraulic valve handles
 - a. 3/16" pins will be reused
*NOTE** Wait to replace valve handles until after servo bracket is installed*
 - b. Verify that the 1-3/4" valve mounting bolts are installed correctly according to *Image 1 note A*

Image 1

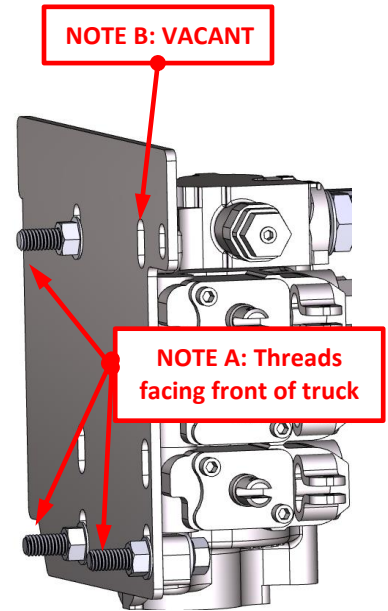


- 2) Install servo mounting bracket onto 1 3/4" valve mounting bolts against valve mounting flange nuts (*Image 2 note A*)
 - a. Using 9/16" socket and ratchet – tighten (3) servo mounting bracket flange nuts (*Image 2 note B*)

Image 2

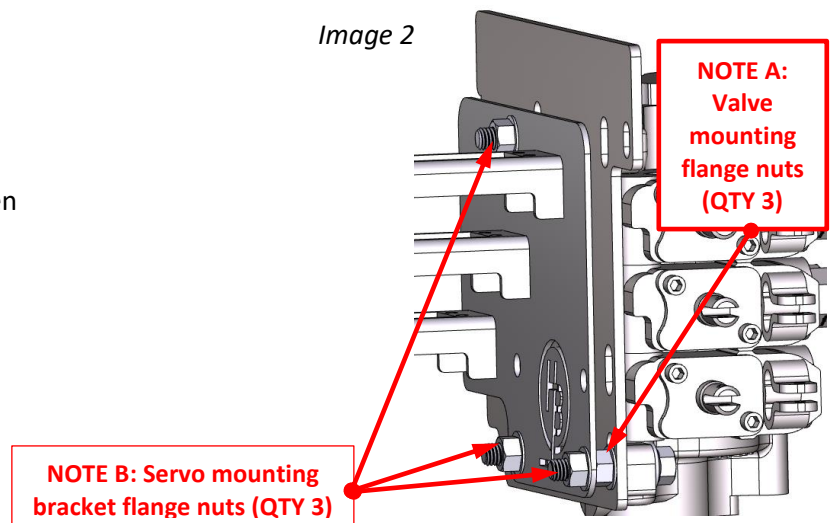

- 3) Replace valve handles onto valve and connect servo linkages to corresponding valve handles

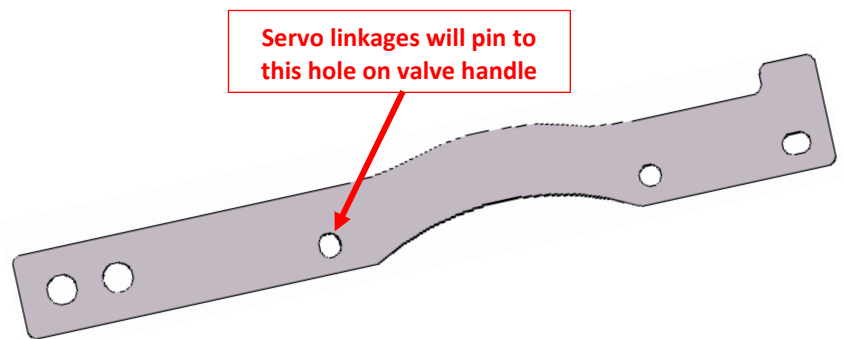

Verify that all components and wiring are properly secured and away from any hot/moving parts.