



HEATH 8/06/2014

INSTALLATION INSTRUCTIONS DASH BRACKET 2003-2015 DODGE

DRAWING NO. **10-0824 B**

ASSEMBLY NO. **DB-HD-04**

REV A **REVISED PICTURES**

ATTACH REAR TAB TO EXISTING
HOLE IN BRACKET BEHIND DASH
USING 1/4 x1 BOLT, LOCK WASHER & NUT



REMOVE EXISTING SCREW
FROM BOTTOM OF DASH
& DRILL 9/32 DIA HOLE
FOR 1/4 x 1 BOLT & NUT




DRILL 11/16" HOLES AS SHOWN

CUT X SHAPE IN FLOOR
TO HELP SEAL AROUND CABLES



TIE UP CABLES FOR LEG ROOM

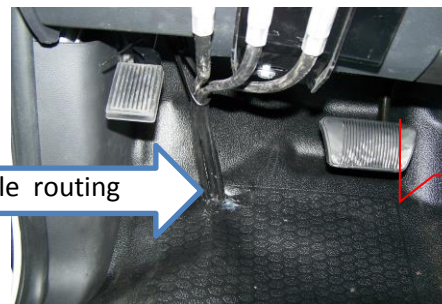

Normal cable routing

Secondary cable
option going into
side panel

