


BILL OF MATERIALS					REVISIONS			
ITEM NO.	PART NO.	QTY	DESCRIPTION	MANUFACTURER	REV.	DESCRIPTION	DATE	APPROVED
1	8468MN 008	168IN	CABLE, 15 COND 18AWG PVC, PVC JACKET 80°C	BELDEN (OR EQ.)	A	INITIAL RELEASE	7/13/2020	
2	430251200	1	CONNECTOR, RECEPTACLE, 12 POS, MICRO-FIT 3.0	MOLEX	B	ADD LED'S & CHANGE TO CON-XALL CONNECTORS	7/27/2020	
3	430300039	11	TERMINAL, 18AWG, FEMALE, CRIMP, MICRO-FIT 3.0	MOLEX	C	CHANGE ITEMS 11 & 20, REMOVE DUST CAPS	8/13/2020	
4	25063 BK005	48IN	CABLE, 3 COND, 18AWG, PVC, BLACK, 105°C	ALPHA WIRE (OR EQ.)				
5	12010996	2	CONNECTOR, SHROUD, 1 TERMINAL, BLACK PLASTIC	WEATHERPACK				
6	12015791	2	CONNECTOR, TOWER, 1 TERMINAL, BLACK PLASTIC	WEATHERPACK				
7	12089040	1	TERMINAL, MALE, 20-18AWG	WEATHERPACK				
8	12089188	1	TERMINAL, FEMALE, 20-18AWG	WEATHERPACK				
9	12015323	2	SEAL, GREEN, 18-20AWG	WEATHERPACK				
10	12010300	2	PLUG, CAVITY, GREEN	WEATHERPACK				
11	6280-3SG-321	3	CONNECTOR, CABLE END, 3 POS, MINI-CON-X	SWITCHCRAFT				
12	AT06-3SA-SR1BLK	1	CONNECTOR, PLUG, 3 POS, STRAIN RELIEF, BLACK	AMPHENOL (OR EQ.)				
13	AT62-16-0622	3	TERMINAL, SZ 16, 18AWG, CRIMP, NICKEL	AMPHENOL (OR EQ.)				
14	AW3S	1	WEDGELOCK, 3 POS	AMPHENOL (OR EQ.)				
15	3055 RD005	26IN	WIRE, HOOK-UP, 18AWG, RED, PVC JACKET, 105° C	ALPHA WIRE (OR EQ.)				
16	3055 BK005	26IN	WIRE, HOOK-UP, 18AWG, BLACK, PVC JACKET, 105° C	ALPHA WIRE(OR EQ.)				
17	ATM06-6S-SR01BK	1	CONNECTOR, PLUG, 6 POS, STRAIN RELIEF, BLACK	AMPHENOL (OR EQ.)				
18	AT62-20-0122	6	TERMINAL, SZ 20, 22-16, CRIMP, NICKEL	AMPHENOL (OR EQ.)				
19	AWM6S	1	WEDGELOCK, 6 POS	AMPHENOL (OR EQ.)				
20	6280-6SG-321	1	CONNECTOR, CABLE END, 6 POS, MINI-CON-X	SWITCHCRAFT				
21	EPS300-1/2-48 BLACK	5IN	HEAT SHRINK, 3:1, 1/2 IN, ADHESIVE LINED, POLYOLEFIN, BLACK	3M (OR EQ.)				
22	ED-HS3-SP50-050	1IN	HEAT SHRINK, 3:1, POLYOLEFIN, BLUE	CABLE ORGANIZER (OR EQ.)				
23	ED-HS3-SP50-050	1IN	HEAT SHRINK, 3:1, POLYOLEFIN, GREEN	CABLE ORGANIZER (OR EQ.)				
24	ED-HS3-SP50-050	1IN	HEAT SHRINK, 3:1, POLYOLEFIN, ORANGE	CABLE ORGANIZER (OR EQ.)				
25	20842	36IN	EXPANDABLE SLEEVE, FLAME RESIST, 1/4IN, BLACK	DELCITY (OR EQ.)				
26	EPS300-3/4-48 BLACK	8.5IN	HEAT SHRINK, 3:1, 3/4 IN, ADHESIVE LINED, POLYOLEFIN, BLACK	3M (OR EQ.)				
27	CM41140-C	2IN	HEAT SHRINK, 3:1, 1-1/4 IN, ADHESIVE LINED, DUAL WALL, BLACK	CABLES MANAGER (OR EQ.)				
28	C5SMF-GJE-CW34Q7T2	2	LED, 5MM, GREEN	CREE (OR EQ.)				
29	C5SMF-RJE-CU14QBB2	1	LED, 5MM, RED	CREE (OR EQ.)				
30	MF1/2LCT528R561G	1	RESISTOR, 560 OHM, 1/2W, 5% AXIAL	KOA SPEER (OR EQ.)				
31	CFS1/2CT26A471J	2	RESISTOR, 470 OHM, 1/2W, 5% AXIAL	KOA SPEER (OR EQ.)				
					1. MANUFACTURER SHALL USE RoHS COMPLIANT PARTS AND PROCESSES.			
					2. EQUIVALENTS, WHEN ALLOWED, SHALL BE RoHS COMPLIANT.			
					3. ASSEMBLE ALL COMPONENTS PER IPC/WHMA-A-620 OR LATEST REV.			
					4. PERFORM 100% CONTINUITY ON ASSEMBLED CABLE.			
					5. INSTALL HEATSHRINK AT ENDS OF BRAIDED SLEEVING.			
					6. OVERMOLD CONNECTION.			




E.	MATERIAL
D.	DO NOT SCALE DRAWING

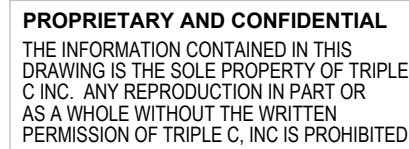

BALE LIFT
HYDRABED

SCHEMATIC

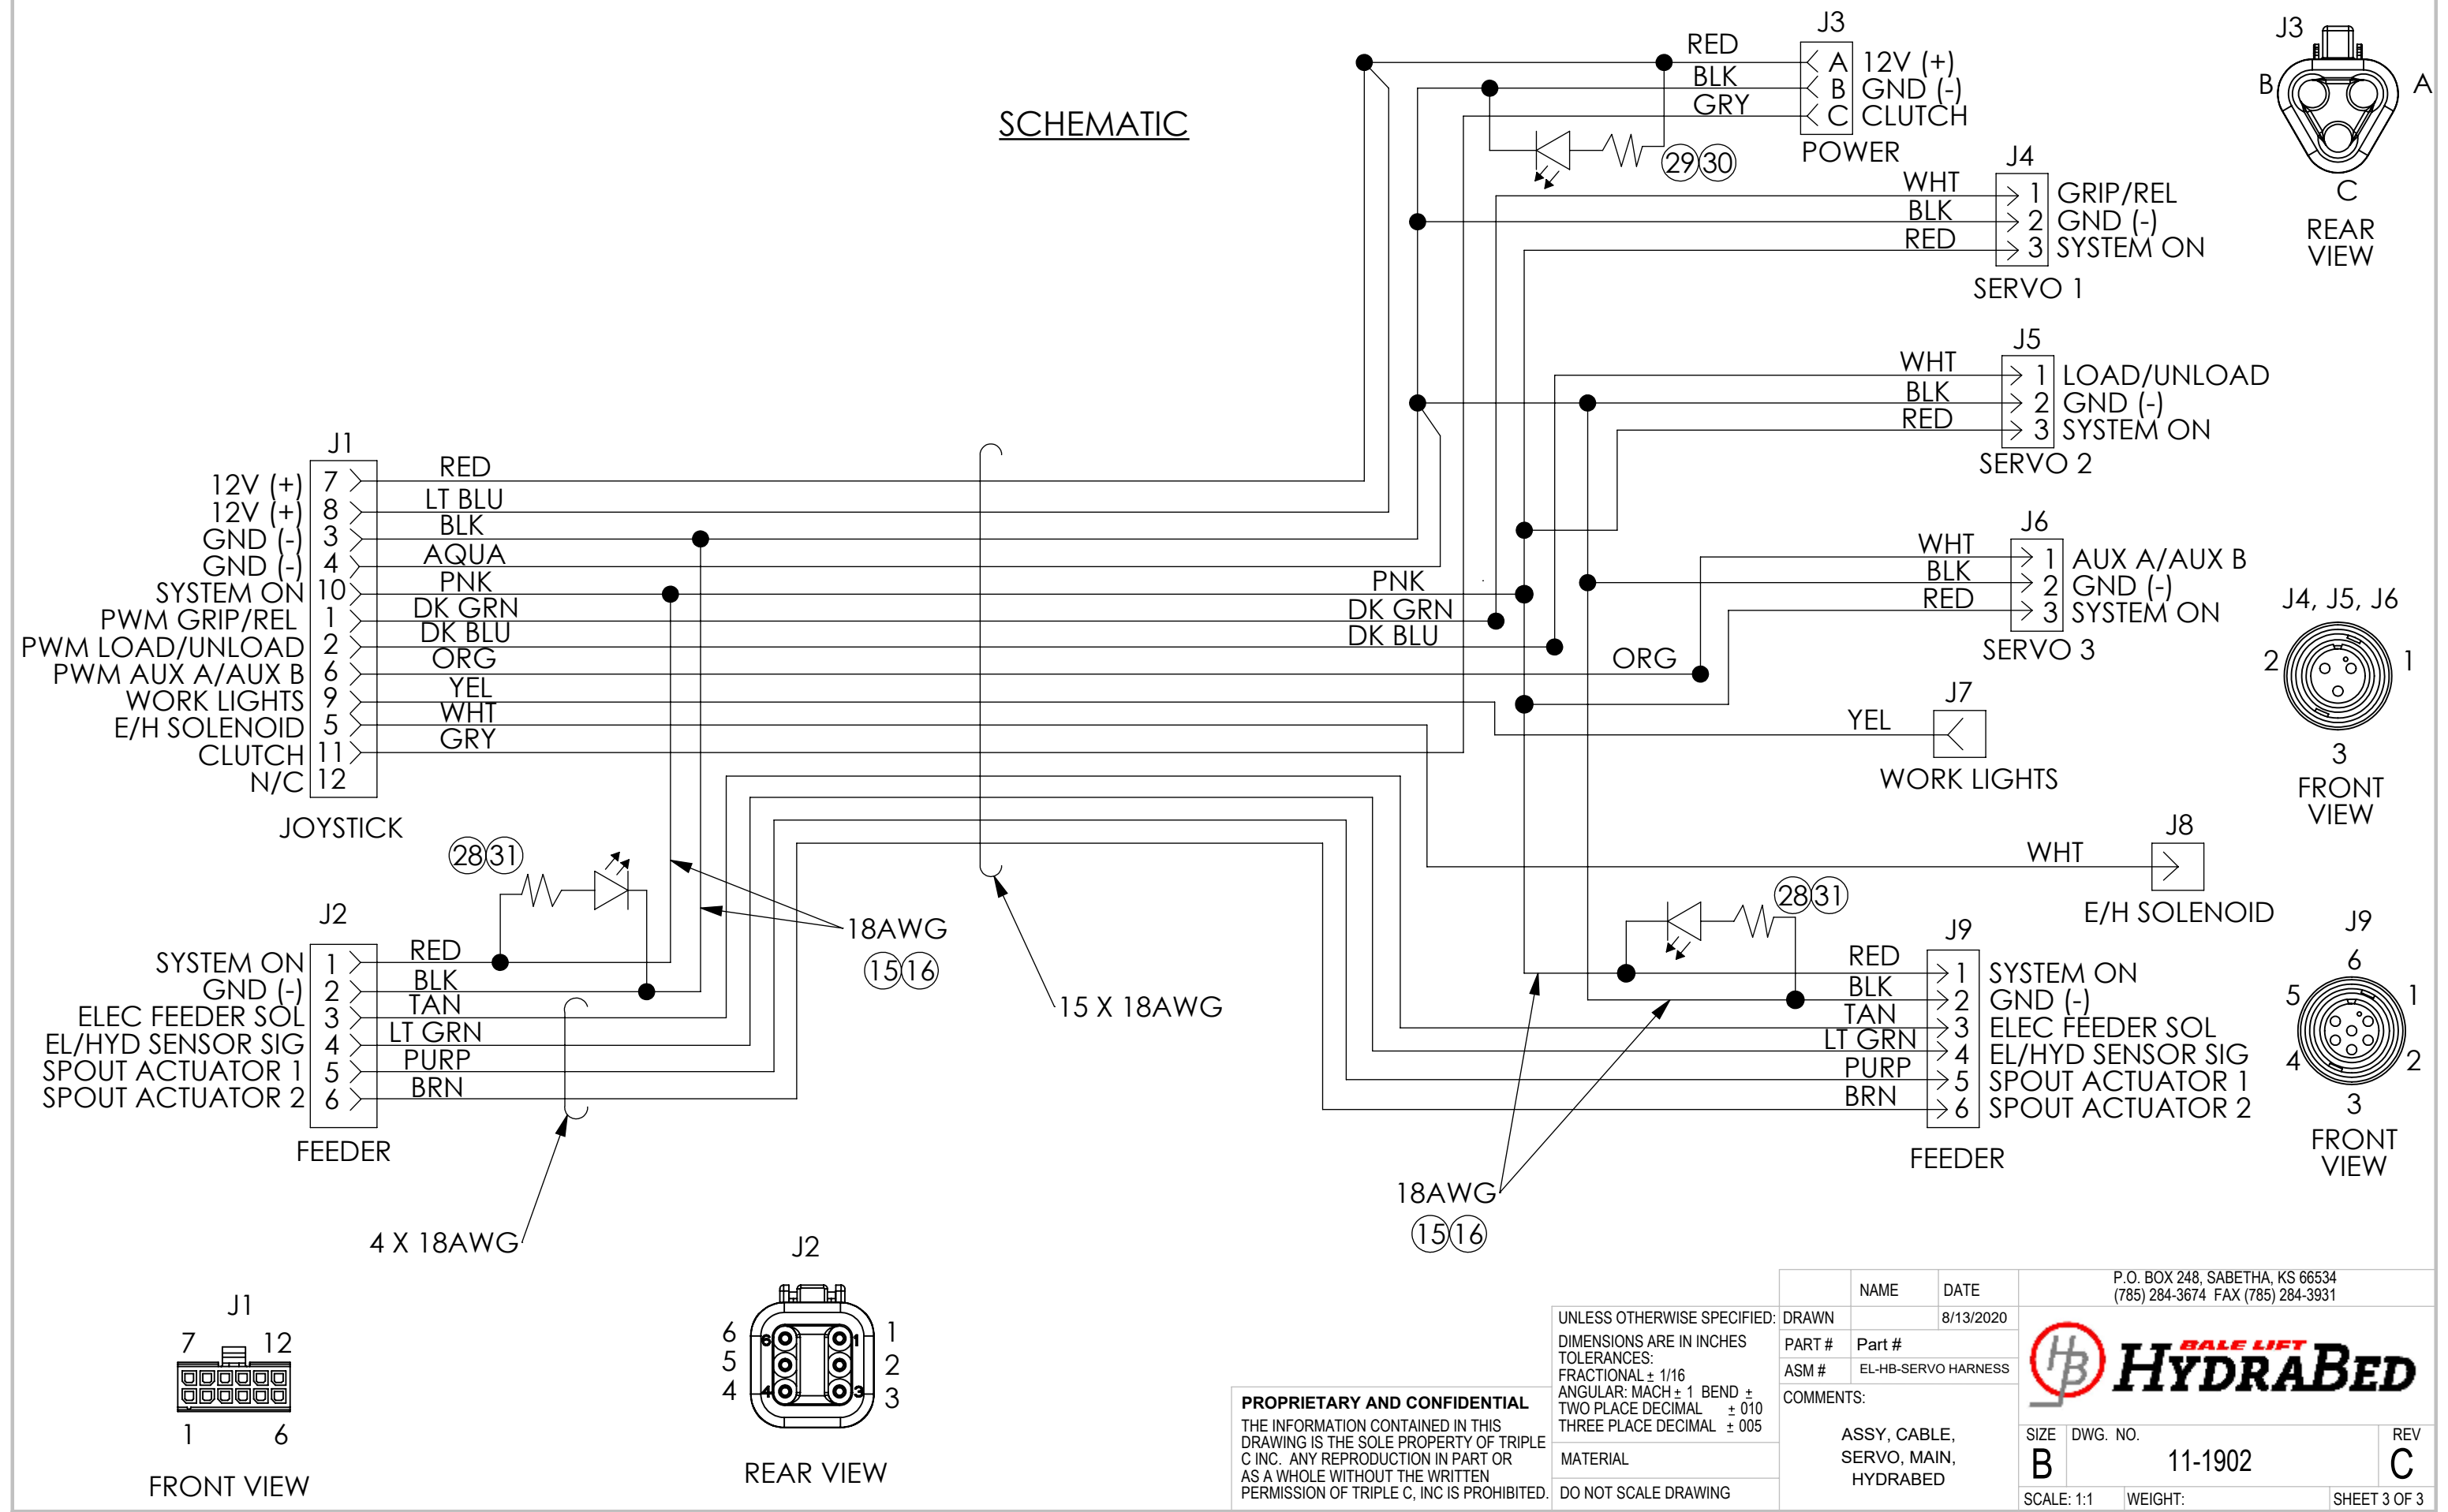

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TRIPLE C INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF TRIPLE C, INC IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL $\pm 1/16$
ANGULAR: MACH ± 1 BEND $\pm$
TWO PLACE DECIMAL ± 0.10
THREE PLACE DECIMAL ± 0.05
MATERIAL
DO NOT SCALE DRAWING

NAME		DATE		P.O. BOX 248, SABETHA, KS 66534 (785) 284-3674 FAX (785) 284-3931	
DRAWN		8/13/2020		 SALE LIFT HYDRABED	
PART #		Part #			
ASM #		EL-HB-SERVO HARNESS			
COMMENTS:					
ASSY, CABLE, SERVO, MAIN, HYDRABED				SIZE DWG. NO. REV	
				B 11-1902 C	
SCALE: 1:1		WEIGHT:		SHEET 3 OF 3	