

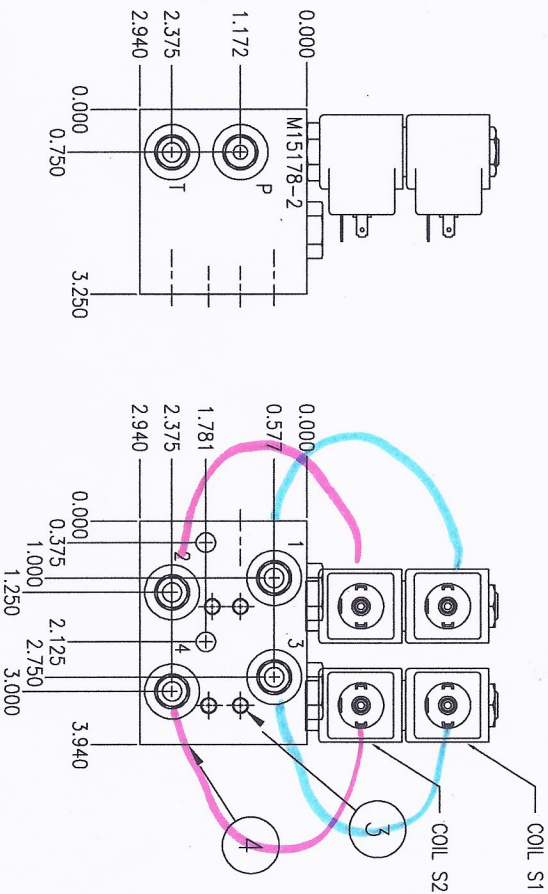


BILL OF MATERIAL

ITEM NO	DESCRIPTION	QUAN
1	H/F SV08-47C-0-N-00 4-WAY SOL VALVE	2
2	H/F DC08-40-0-N-25 DOUBLE POC	2
3	7MM PERMANENT PLUG	4
4	M15178-2 VALVE BODY	1
5	H/F 6306012 12 VDC DIN COIL	4

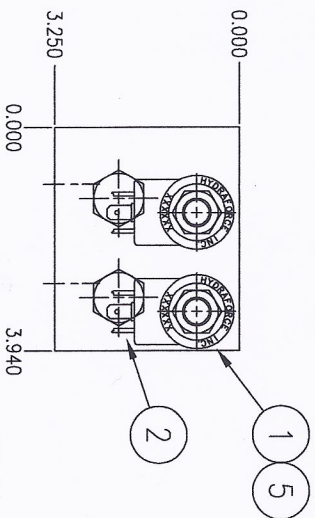

ELECTRICAL CONNECTIONS:

ENERGIZE COIL S1 = FLOW TO PORT 1 OR 3
ENERGIZE COIL S2 = FLOW TO PORT 2 OR 4

HYDRAULIC SCHEMATIC

SPECIFICATIONS:

MAXIMUM PRESSURE: 3000 PSI
NOMINAL FLOW: 3 GPM
PORT SIZES: (P, T)
(1, 2, 3, 4)
MOUNTING HOLES: (2)
-6 SAE O-RING
-6 SAE O-RING
.344 DIA.

THIS PRINT AND INFORMATION THEREIN IS CONFIDENTIAL AND IS THE PROPERTY OF FLUIDTECH INC. IT IS NOT TO BE COPIED OR REPRODUCED WITHOUT WRITTEN PERMISSION.	
TOLERANCES UNLESS SPECIFIED ARE: FRACTIONS 3/16" & 1/4" - .000 DECIMALS 3/16" & 1/4" - .000 SURFACE FINISH EXCEPT AS NOTED	FORM NO. DES 12/9/10 APPROVED BY ACAD FILE NO. P15178-3
MATERIAL: ALUMINUM, 6061-T6, 3 X 4 X 3.25 NOT ANODIZED	DATE FULL ON CAD DRAWING NUMBER P15178-3 REV D