



This drawing contains confidential proprietary information of Triple C, Inc. and is subject to return upon request. The furnishing of this drawing is not to be construed as the grant of any license, express or implied, to manufacture, have manufactured, use or sell the structures shown hereon.

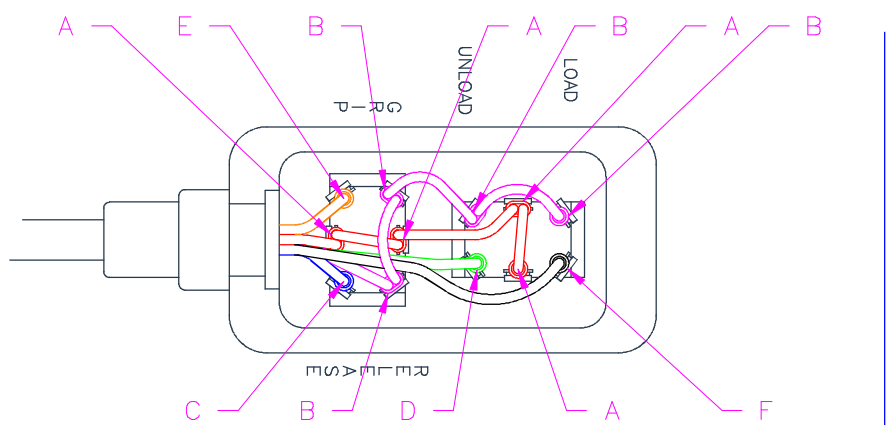

ITEM	CONNECTOR	WIRE COLOR	WIRE LENGTH	FUNCTION
A	5/16 RING TERMINAL W/ 10 AMP FUSE HOLDER	RED	15	POWER
B	10 RING TERMINAL	BLACK	15	PUMP SOL
C	FULLY INSULATED FEMALE PUSH-ON TERMINAL .250	BLUE	7	RELEASE
D	FULLY INSULATED FEMALE PUSH-ON TERMINAL .250	GREEN	7	UNLOAD
E	FULLY INSULATED FEMALE PUSH-ON TERMINAL .250	ORANGE	13	GRIP
F	FULLY INSULATED FEMALE PUSH-ON TERMINAL .250	WHITE	13	LOAD

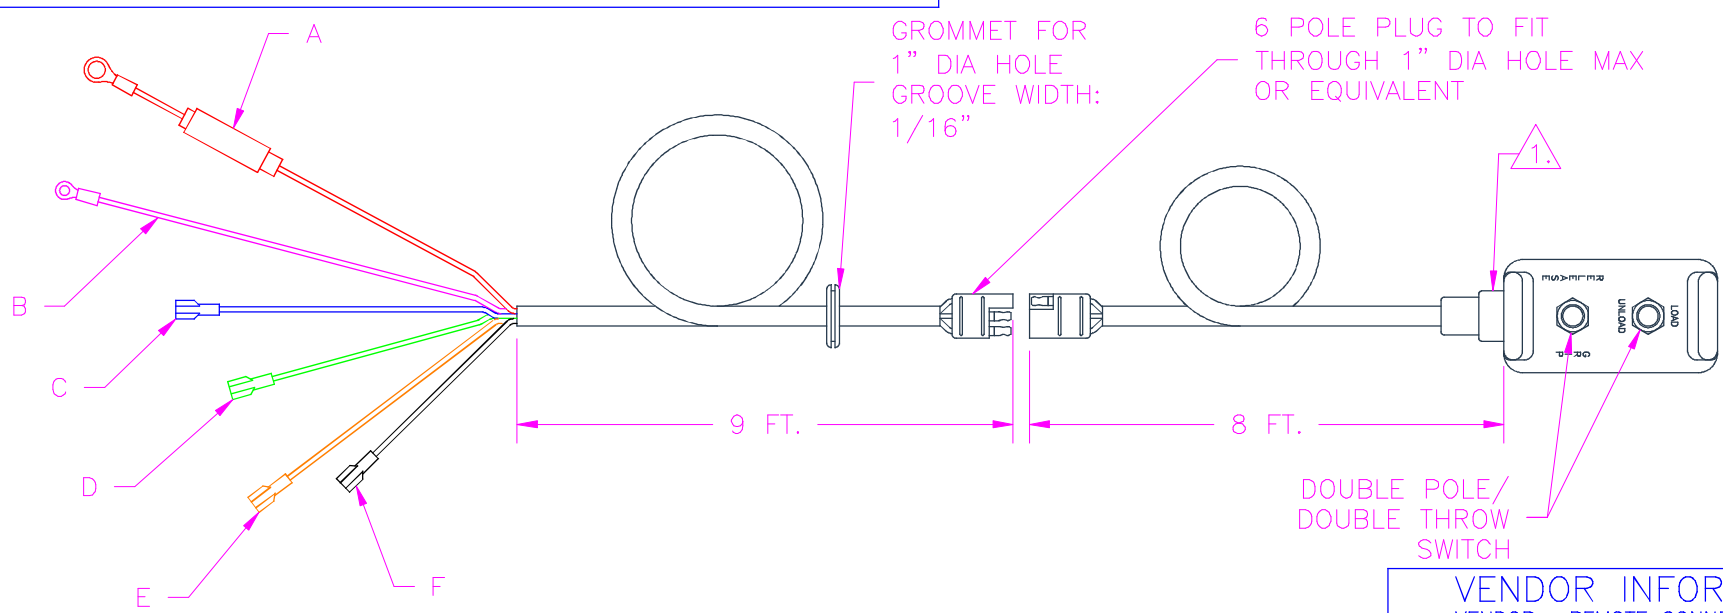

NOTES:

1. PROVIDE CABLE STRAIN RELIEF.
2. EACH FUNCTION OF THE SWITCH MUST ENERGIZE THAT PARTICULAR WIRE AND TERMINAL "B".
3. THE PLUG MUST PASS THROUGH A DRILLED HOLE IN TRUCK CAB FROM THE OUTSIDE. THE GROMMET MUST BE LARGE ENOUGH TO PLUG DRILLED HOLE. THIS WILL ALLOW THE USER TO DISCONNECT THE SWITCH PENDENT INSIDE THE TRUCK CAB.

VENDOR INFORMATION

VENDOR: REMOTE CONNECTIONS, INC.

VENDOR P/N: B2143

TRIPLE C INC.

P.O. BOX 248, SABETHA, KS 66534
(785) 284-3674 FAX (785) 284-3931

TOLERANCES
Unless otherwise specified
XX .010
XXX .005
XXXX .0005
X/X 1/32
ANGLE 0°30'

SHEET
__OF__

SCALE:
NTS

DRAWN BY:
CEDRIC HEINIGER
03/01/96

TITLE:
SWITCH PENDANT SCHEM.,
HYDRA-BD2200

ASSEMBLY NUMBER:
BD22-50C1

DRAWING NUMBER:
20-0103

REV
C