



CONSTRUCTION

LET'S BREAK
GROUND
TOGETHER



www.pengoattachments.com | 800.599.0211

powerful construction attachments

General Purpose and Construction Catalog



GP AUGERS | AGGRESSOR®

FEATURES

- 40° or 50° Dual Angle Teeth
- TriFlow® Pilot Bit with Three Drill Points
- 5/16" Thick Double Flight
- 3 Point Lock Lug and Bolt


ACCESSORIES

- Bolt On Rock Head® (see pg. 15)
- Revolution Series Drives
- R-256 Auger Stand (135102)

OAL	FLIGHT	FLIGHT THICK	CENTER SHAFT
49" or 51"	Double/ Semi-Double	5/16"	2 7/8" OD x .203" W 3 1/2" OD x .300" W

AUGER HEAD TYPE	PILOT BIT STYLE	TEETH	HUBS
Cast	TF-350	40/50 Series	R-200, R-256, H-200

ITEM	DIA	NO. TEETH	LBS.	R256	R200	H200
6-AR-49	6"	2	54	135534	135570	135546
9-AR-49	9"	4	78	135535	135571	135547
12-AR-51	12"	4	114	135536	135572	135548
15-AR-51	15"	5	117	135537	135573	135549
18-AR-51	18"	6	145	135538	135574	135550
24-AR-51	24"	8	210	135539	135575	135551
30-AR-51	30"	10	220	135540	135576	135552
36-AR-51	36"	12	295	135541	135577	135553

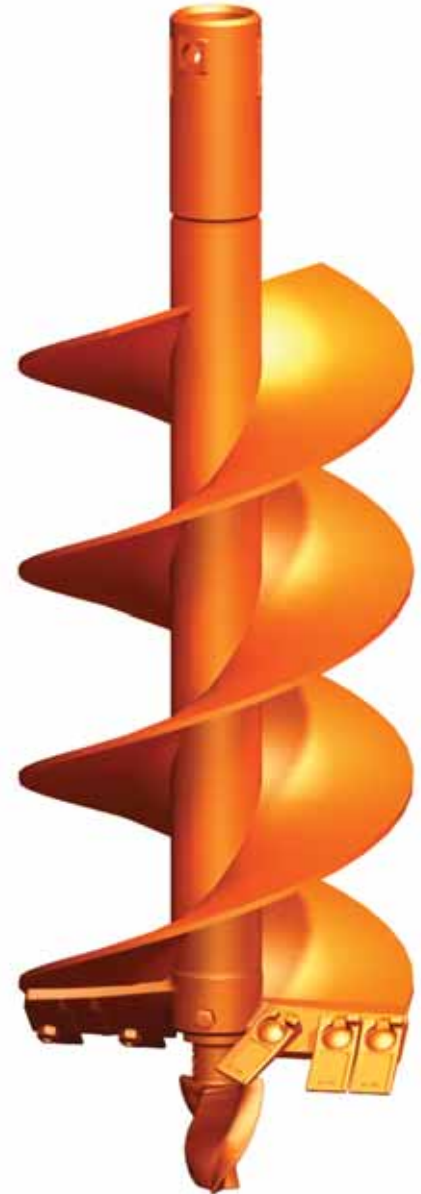

AGGRESSOR®
US Patents: 5,426,875 5,433,033 and 5,476,149



GP AUGERS | LANDSCAPE AGGRESSOR®

FEATURES

- 40° or 50° Dual Angle Teeth
- TriFlow® Pilot Bit with Three Drill Points
- 1/4" Thick Semi-Double Flight
- 3 Point Lock Lug and Bolt

ACCESSORIES

- Revolution Series MS Drives
- R-256 Auger Stand (135102)

OAL	FLIGHT	FLIGHT THICK	CENTER SHAFT
30", 42" or 48"	Semi-Double	1/4"	2 7/8" OD x .203" W

AUGER HEAD TYPE	PILOT BIT STYLE	TEETH	HUBS
Cast	TF-350	40/50 Series	R-200, R-256

ITEM	DIA	NO. TEETH	LBS.	R256	R200
6-MA-42	6"	2	35	138100	138000
9-MA-42	9"	4	42	138101	138001
12-MA-42	12"	4	46	138102	138002
15-MA-42	15"	5	50	138103	138003
18-MA-42	18"	6	67	138104	138004
24-MA-42	24"	8	85	138105	138005
30-MA-42	30"	10	104	138108	138008
36-MA-42	36"	12	220	138109	138009
924-MA-42	9/24"	8	71	138106	138006
1230-MA-42	12/30"	11	75	138107	138007

LANDSCAPE
AGGRESSOR®





GP AUGERS | TRIMAX®

FEATURES

- 35 Series Fas-N-Lok® Teeth
- TriFlow® Pilot Bit with Three Drill Points
- 5/16" Thick Double Flight
- 3 Point Lock Lug and Bolt



ACCESSORIES

- Weld-On Boring Heads (see pg. 15)
- Revolution Series Drives
- R-256 Auger Stand (135102)

OAL	FLIGHT	FLIGHT THICK	CENTER SHAFT
42", 48" or 60"	Single or Double	5/16"	3 1/2" OD x .300" W

AUGER HEAD TYPE	PILOT BIT STYLE	TEETH	HUBS
Cast	TF-350	37 Series Teeth and 5T30	R-200, R-256, H-200

42" OAL

SINGLE FLIGHT

DOUBLE FLIGHT

ITEM	DIA	NO. TEETH	LBS.	R256	R200	H200	LBS.	R256	H200
6-TM-42	6"	2	46	552940	101324	101318	52	553464	101327
8-TM-42	8"	4	55	553071	102175	101319	59	553465	101328
9-TM-42	9"	4	59	553072	101325	552960	74	553466	101329
10-TM-42	10"	4	66	553073		552962	77	553467	101330
12-TM-42	12"	4	76	553074	101326	552964	88	553468	101331
14-TM-42	14"	6	91	553075		552966	102	553469	101332
16-TM-42	16"	6	97	553076		552968	116	553470	101333
18-TM-42	18"	6	112	553077	102188	552970	129	553471	101334
20-TM-42	20"	6	117	553078		552972	135	553472	101335
24-TM-42	24"	8	151	553079		552974	156	553473	101336
30-TM-42	30"	10	168	553080		101320	173	553474	101337
36-TM-42	36"	12	270	553081		101321	284	553475	101338
42-TM-42	42"	15	302	553082		101322	343	553476	101339
48-TM-42	48"	18	380	553083		101323		553477	102133



Single Flight
TriMax® Auger



US Patents: 5,476,149



GP AUGERS | TRIMAX®



48" OAL

SINGLE FLIGHT

DOUBLE FLIGHT

ITEM	DIA	NO. TEETH	LBS	R256	R200	H200	LBS.	R256	R200	H200
6-TM-48	6"	2	49	553090	101519	101340	58	553480	101612	101354
8-TM-48	8"	4	58	553091	101700	101341	65	553481	101613	101355
9-TM-48	9"	4	62	553092	101520	101342	80	553482		101356
10-TM-48	10"	4	69	553093	102045	101343	83	553483	102103	101357
12-TM-48	12"	4	79	553094	101521	101344	94	553484	101617	101358
14-TM-48	14"	6	94	553095	102122	101345	108	553485	102130	101359
16-TM-48	16"	6	100	553096		101346	122	553486		101360
18-TM-48	18"	6	115	553097	102046	101347	135	553487		101361
20-TM-48	20"	6	120	553098		101348	140	553488		101362
24-TM-48	24"	8	153	553099	102047	101349	162	553489		101363
30-TM-48	30"	10	171	553100		101350	180	553490		101364
36-TM-48	36"	12	273	553101		101351	293	553491		101365
42-TM-48	42"	15	305	553102		101352	355	553492		101366
48-TM-48	48"	18		553103		101353		553493		101367

60" OAL

SINGLE FLIGHT

DOUBLE FLIGHT

ITEM	DIA	NO. TEETH	LBS.	R256	R200	H200	LBS.	H200
6-TM-60	6"	2	71	102225	101573	553110		
8-TM-60	8"	4	76			553111		
9-TM-60	9"	4	89	101621	101694	553112		
10-TM-60	10"	4	91			553113		101702
12-TM-60	12"	4	102	102216	101695	553114		101703
14-TM-60	14"	6	111			553115		101704
16-TM-60	16"	6	125			553116		
18-TM-60	18"	6	146			553117		
20-TM-60	20"	6	151			553118		
24-TM-60	24"	8	186			553119		102025
30-TM-60	30"	10	210			553120		
36-TM-60	36"	12	410			553121		
42-TM-60	42"	15	452			553122		
48-TM-60	48"	18				553123		



Double Flight
TriMax® Auger



US Patents: 5,476,149



GP AUGERS | STEP ROCK AUGER

FEATURES

- CB-10 Drag Style Teeth and H-10 Holder
- 375-TCH-171 Pilot Bit
- 5/16" Thick Single Flight




ACCESSORIES

- Revolution Series Drives
- Universal Mounting Plate

OAL	FLIGHT	FLIGHT THICK	CENTER SHAFT
42"	Single	5/16"	2 7/8" OD x .203" W 3 1/2" OD x .300" W

AUGER HEAD TYPE	PILOT BIT STYLE	TEETH	HUBS
Fabricated	375-TCH-171	CB-10 Carbide	H-200

ITEM	DIA	NO. TEETH	LBS.	H200
6-GPSRA-42	6"	4	50	553443
8-GPSRA-42	8"	4	56	553444
9-GPSRA-42	9"	4	65	553445
10-GPSRA-42	10"	5	69	553446
12-GPSRA-42	12"	6	80	553447
16-GPSRA-42	16"	8	110	553449
18-GPSRA-42	18"	9	125	553450
24-GPSRA-42	25"	12	150	553452

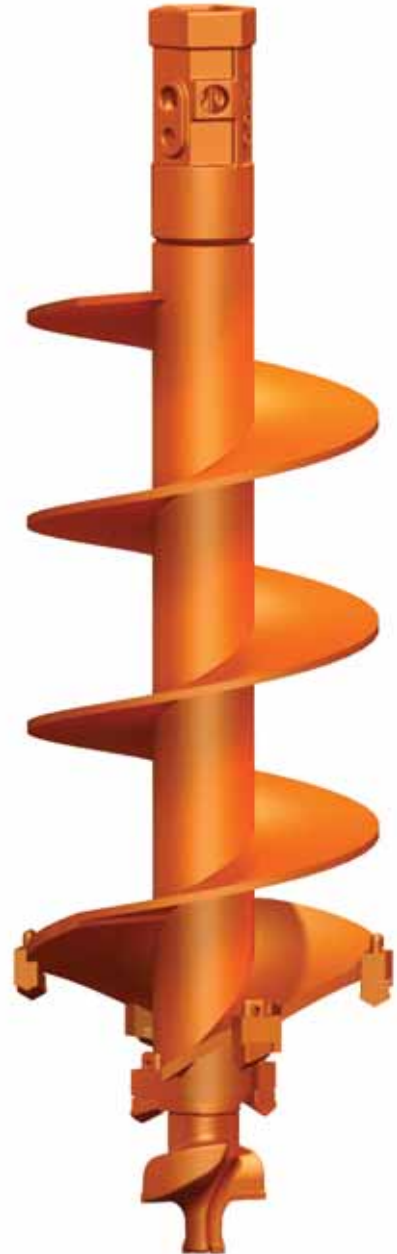



GP AUGERS | SEVERE ROCK RIPPER®

FEATURES

- Hardfaced Outside Gage Holders
- Heat-Treated Cast Alloy Head (6"-12")
- 1/2" Thick Lead Flight
- The All New Strata SR-76 Concial Tooth
- For Use in Difficult Rock Drilling Conditions.




ACCESSORIES

- Revolution Series Drives
- Universal Mounting Plate

OAL	FLIGHT	FLIGHT THICK	CENTER SHAFT
48"	Single	1/2"	3 1/2" OD x .300" W

AUGER HEAD TYPE	PILOT BIT STYLE	TEETH	HUBS
Cast & Fab	RR 1.75 Sq.	SR-76	H-200

ITEM	DIA	NO. TEETH	LBS.	H200
6-SRR-48	6"	8	80	137950
9-SRR-48	9"	10	108	137951
12-SRR-48	12"	12	135	137952
16-SRR-48	16"	15	170	137953
18-SRR-48	18"	16	192	137954
20-SRR-48	20"	17	220	137955
24-SRR-48	24"	20	285	137956

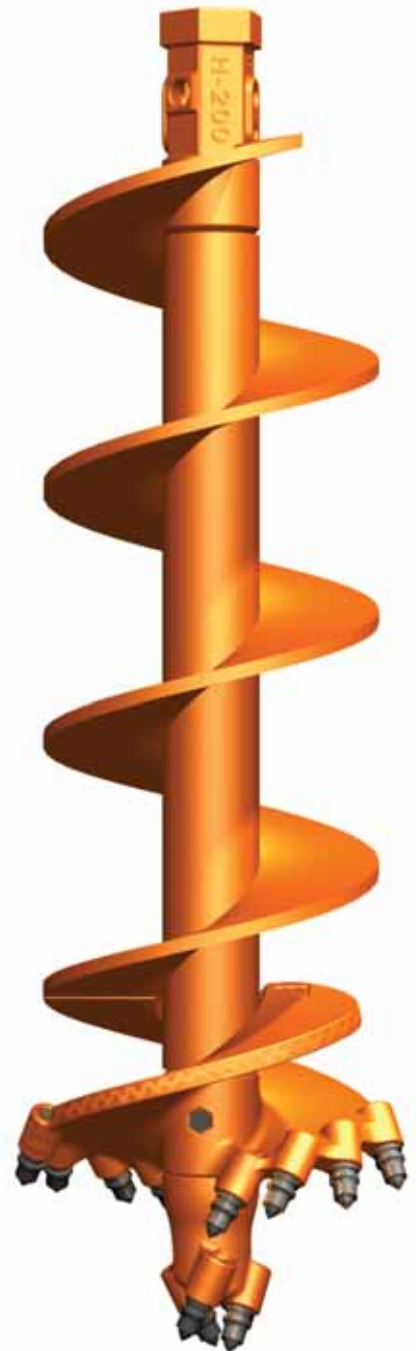



GP AUGERS | CS AUGERS

FEATURES


- Two-Fluted Pilot Bit
- 35 Series Fas-N-Lok® Teeth
- 1/8" Thick Single Flight

OAL	FLIGHT	FLIGHT THICK	CENTER SHAFT
36", 42" or 48"	Single	1/8"	1 5/8" OD x .140" W

AUGER HEAD TYPE	PILOT BIT STYLE	TEETH	HUBS
Fabricated	SB25, SB35 & SB45	35 Series	7/8" Sq, 1" Rnd, Stihl, 1 3/8" Hex, 1 1/4" Sq.

ITEM	DIA	LBS.	1" RND	2" PENG	7/8" SQ.	1 3/8" HEX	STIHL	1 1/4" SQ.
2-CS-36	2"	8	101368	101380	553295		101780	102164
3-CS-36	3"	10	101369	101381	553296			102165
4-CS-36	4"	17	101370	101382	553297	101697	101599	101739
6-CS-36	6"	18	101371	101383	553298	101618	101652	101602
7-CS-36	7"	18	101372	101384	553299			101538
8-CS-36	8"	23	101373	101385	553301	101578		101544
9-CS-36	9"	27	101374	101386	101386			101669
10-CS-36	10"	27	101375	101387	553303	101559	101727	101535
12-CS-36	12"	30	101376	101388	553304	101546	101677	101545
14-CS-36	14"	38	101377	101389	135902			102177
16-CS-36	16"	45	101378	101390	553306		101743	
18-CS-36	18"	47	101379	101391	553307			

ITEM	DIA	LBS.	1" RND	2" PENG	7/8" SQ.	1 3/8" HEX	STIHL	1 1/4" SQ.
2-CS-42	2"	9	101392	101404	553311			
3-CS-42	3"	11	101393	101405	133919			
4-CS-42	4"	15	101394	101406	553313		102075	
6-CS-42	6"	20	101395	101407	553314	101629	101616	101558
7-CS-42	7"	21	101396	101408	553316			
8-CS-42	8"	25	101397	101409	553318	101651	101642	101577
9-CS-42	9"	30	101398	101410	553319	101701		101692
10-CS-42	10"	30	101399	101411	553321	101603	102063	
12-CS-42	12"	32	101400	101412	553323	101604	101726	101650
14-CS-42	14"	40	101401	101413	134711			
16-CS-42	16"	47	101402	101414	553324		102064	102124
18-CS-42	18"	50	101403	101415	553326		101725	101791

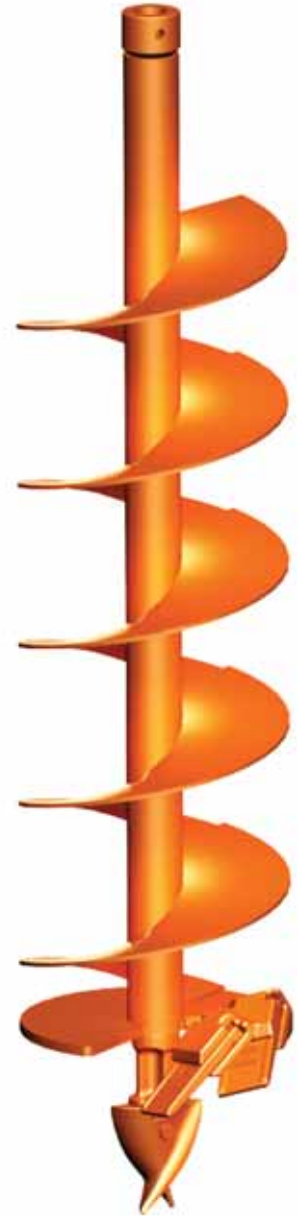

STANDARD HUBS AVAILABLE:

1 1/4" Round with Lock	Stihl
1" Round	General
1 1/4" Square	Little Beaver
7/8" Square	Groundhog
1 3/8" Hex	General
1 1/4" Hex	Stanley



GP AUGERS | HAND HELD AUGERS

FEATURES

- Lightweight and Durable
- Heat-Treated Cast Auger Head
- 1" Square Hub
- Easily Replacable - Insert, Turn and Bolt!
- Auger Flight Fits Securely Under Tabs
- Only One Bolt and Nut Required

ACCESSORIES

- OMA-250H
One Man Auger Unit (see pg. 17)

OAL	FLIGHT	FLIGHT THICK	CENTER SHAFT
36"	Semi-Double	1/8"	1" OD x .109" W

AUGER HEAD TYPE	PILOT BIT STYLE	TEETH	HUBS
Cast	HH Cast	None	1" Square

ITEM	DIA	LBS.	PART NO.
4-HH-36	4"	7	137293
6-HH-36	6"	9	137294
8-HH-36	8"	14	137295
4" Replacement Head	4"	.7	137290
6" Replacement Head	6"	.9	137291
8" Replacement Head	8"	1.1	137292

One Piece Heat Treated
Cast Auger Head





GP AUGERS | GP QUICK CHANGE

FEATURES

- 42" OAL Assembled
- One Flight Body - Three Head Options
- No Need to Carry Multiple Augers
- 5/16" Thick Single Flight
- 2" Round, 2" Hex and 2 9/16" Round Hubs



FLIGHT BODIES

ITEM	DIA	LBS.	R256	R200	H200
FGP-6	6"	40	553710	101270	101269
FGP-8	8"	41	553711	101273	101272
FGP-9	9"	49	553712	101276	101275
FGP-10	10"	52	553713	101279	101278
FGP-12	12"	61	553714	101282	101281
FGP-16	16"	88	553716	101285	101284
FGP-18	18"	102	553718	101288	101287
FGP-20	20"	115	553720	101291	101290
FGP-24	24"	120	553719	101294	101293
FGP-30	30"	145	135670	101297	101296



Quick Change Connection
6" - 12" Diameter = 1 5/8" Hex
16" - 24" Diameter = 2" Hex



OPTION 1

TriMax Head, 37 and 5T30 Teeth, TriFlow® Pilot Bit



OPTION 2

Step Rock Head, CB-10 Teeth, 375-TCH-171 Pilot



OPTION 3

Rock Ripper® Head, SR76 Teeth, RR 1.75 Sq. Pilot

ITEM	NO. Teeth	LBS.	PART
POTMH-6	2	18	553700
POTMH-8	4	20	553701
POTMH-9	4	22	553702
POTMH-10	4	22	553703
POTMH-12	4	23	553704
POTMH-16	6	27	553705
POTMH-18	6	34	553706
POTMH-20	6	36	553707
POTMH-24	8	40	553708
POTMH-30	10	46	553709

ITEM	NO. Teeth	LBS.	PART
POLRH-6	4	14	553690
POLRH-8	4	19	553691
POLRH-9	4	20	553692
POLRH-10	5	21	553693
POLRH-12	6	23	553694
POLRH-16	8	28	553696
POLRH-18	8	29	553697
POLRH-20	9	33	553698
POLRH-24	10	36	553699
POLRH-30	12	45	135674

ITEM	NO. Teeth	LBS.	PART
6-POSRR	8	32	133880
8-POSRR	10	34	133881
9-POSRR	10	37	133882
10-POSRR	10	39	133883
12-POSRR	12	46	133884
16-POSRR	15	66	133885
18-POSRR	16	76	133886
20-POSRR	17	88	133887
24-POSRR	20	115	133888
30-POSRR	24	163	133889



GP AUGERS | TREE AUGER

FEATURES

- 40° or 50° Dual Angle Teeth
- TriFlow® Pilot Bit with Three Drill Points
- 5/16" Thick Double Flight
- 3 Point Lock Lug and Bolt


ACCESSORIES

- Bolt On Rock Head (see pg. 15)
- Revolution Series Drives
- R-256 Auger Stand (135102)

OAL	FLIGHT	FLIGHT THICK	CENTER SHAFT
48"	Double/Semi Dbl	5/16"	2 7/8" OD x .203" W 3 1/2" OD x .300" W

AUGER HEAD TYPE	PILOT BIT STYLE	TEETH	HUBS
Cast	TF-350	40/50 Series	R-200, R-256, H-200

ITEM	DIA 1	DIA 2	NO. TEETH	R256	R200	H200
918-AR-48	9"	18"	8	135542	135578	135554
1224-AR-48	12"	24"	9	135523	135579	135555
1530-AR-48	15"	30"	11	135544	135580	135556
1836-AR-48	18"	36"	13	135545	135581	135557

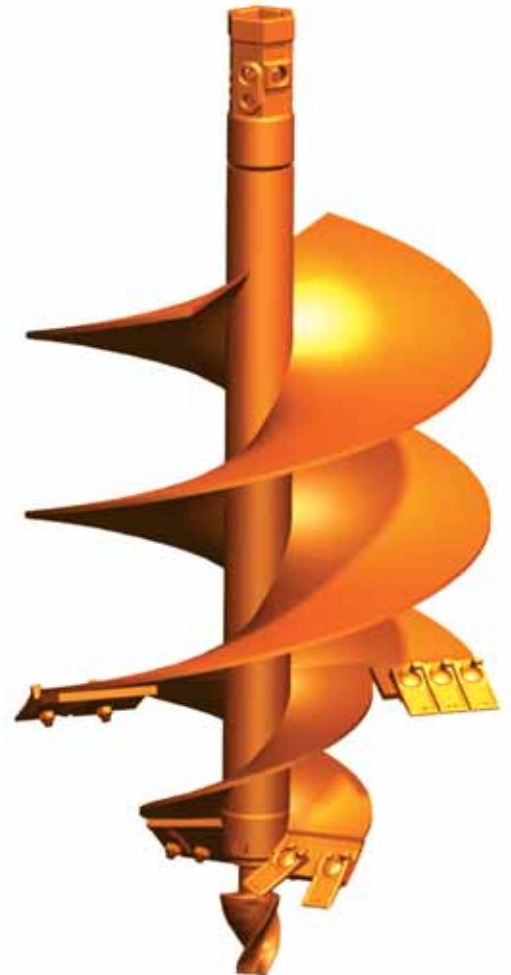



AG AUGERS | PTO AGGRESSOR®

FEATURES


- 40° or 50° Dual Angle Teeth
- TriFlow® Pilot Bit with Three Drill Points
- 3/16" Thick Helicoid Flight
- 3 Point Lock Lug and Bolt
- 2" Round Hub



OAL	FLIGHT	FLIGHT THICK	CENTER SHAFT
30", 42, 48"	Helicoid/Semi-DbI	3/16"	2 3/8" OD x .154" W

AUGER HEAD TYPE	PILOT BIT STYLE	TEETH	HUBS
Cast	TF-350	40/50 Series	R-200

ITEM	DIA	NO. TEETH	30" OAL	LBS.	42" OAL	LBS.	48" OAL
9-AR-PTO	9"	4	137141	39	137152	42	137181
12-AR-PTO	12"	4	137142	47	137153	54	137182
15-AR-PTO	15"	5	137143	53	137154	58	137183
18-AR-PTO	18"	6	137144	59	137155	63	137184
24-AR-PTO	24"	8	137145	65	137156	67	137185

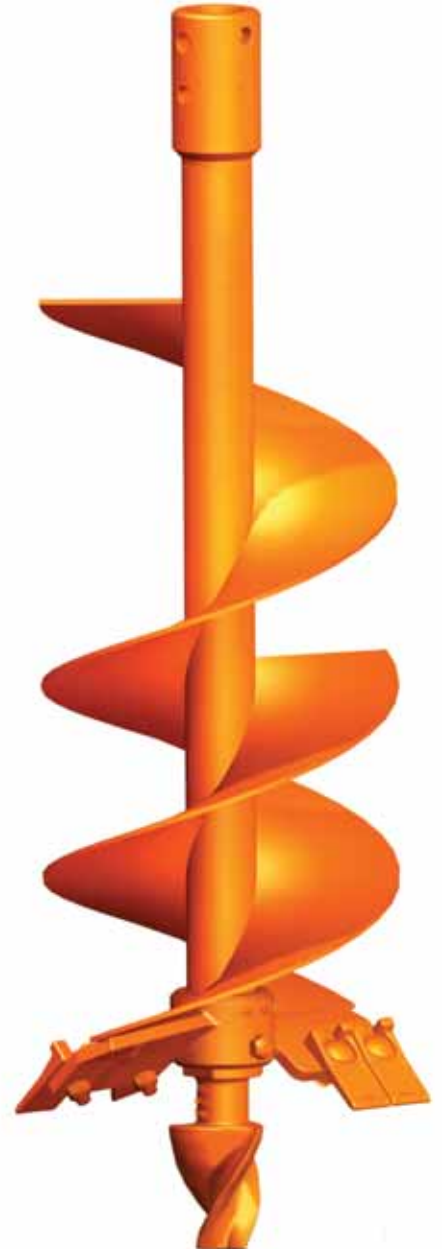

AGGRESSOR PTO



AG AUGERS | AG AGGRESSOR®

FEATURES

- 40° or 50° Dual Angle Teeth
- SB-35 S175 Pilot Bit
- 3/8" Thick Helicoid Flight
- 2" Round Safety Hub, a PENGO Exclusive!
- OAL = 42" and 48"

ACCESSORIES

- Revolution Series MS Drives



OAL	FLIGHT	FLIGHT THICK	CENTER SHAFT
42" or 48"	Double/Semi-DbI	3/8"	2 3/8" OD x .154" W

AUGER HEAD TYPE	PILOT BIT STYLE	TEETH	HUBS
Fabricated	SB-35 S175	40/50 Series	R-200

ITEM	DIA	NO. TEETH	LBS.	42"	LBS.	48"
6-LTA-42	6"	2	35	553225		553228
9-LTA-42	9"	4	52	553226		553229
12-LTA-42	12"	4	58	553227		553230



AGGRESSOR®



AG AUGERS | AG MAX

FEATURES

- 35 Series Fas-N-Lok® Teeth
- TriFlow Pilot Bit with Three Drill Points
- 3/16" Thick Helicoid Flight
- 2" Round Hub, 2 9/16" Round and 2" Hex
- OAL = 42" and 48"

ACCESSORIES

- Revolution Series Drives
- Universal Mounting Plate



OAL	FLIGHT	FLIGHT THICK	CENTER SHAFT
42" or 48"	Single	3/16"	2 3/8" OD x .154" W


AUGER HEAD TYPE	PILOT BIT STYLE	TEETH	HUBS
Cast	TF- 350	37 Series and 5T30	R-200, R-256

42" AG MAX

ITEM	HUB	NO. TEETH	PART NO.
6-AGMAX-42	R-200	2	553600
9-AGMAX-42	R-200	4	553605
9-AGMAX-42D	R-256	4	101444
9-AGMAX-42D	R-200	4	552478
10-AGMAX-42D	R-200	4	552479
12-AGMAX-42	R-200	4	553610
16-AGMAX-42	R-200	6	553628
18-AGMAX-42	R-200	6	553631

48" AG MAX

ITEM	HUB	NO. TEETH	PART NO.
6-AGMAX-48	R-200	2	555050
9-AGMAX-48	R-200	2	555051
9-AGMAX-48	R-256	2	102119
12-AGMAX-48	R-200	2	555052
14-AGMAX-48	R-200	4	555053
14-AGMAX-48	H-200	4	102212
16-AGMAX-48	R-200	4	555054
18-AGMAX-48	R-200	4	555055
24-AGMAX-48	R-200	6	555056

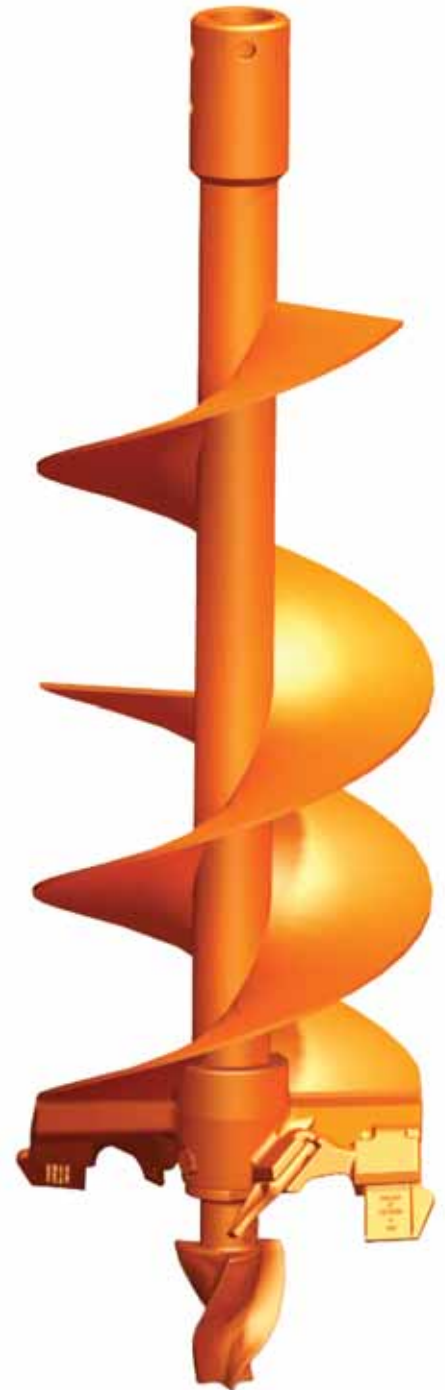



REPLACEMENT HEADS | BOLT on ROCK HEAD®

FEATURES

- Pengo's Patented Bolt On Rock Head®
- Convert Your Dirt Aggressor into a Rock Auger in Minutes!
- Innovative Wear Caps
- Pengo's Exclusive S21-RR Tooth
- Diameters from 6" to 24"

ITEM	DIA	NO. TEETH	LBS.	R200
6-BORH	6"	8	24	137991
9-BORH	9"	10	36	137992
12-BORH	12"	12	43	137993
15-BORH	15"	14	47	137994
18-BORH	18"	16	62	137995
24-BORH	24"	20	79	137996

BoRH
Bolt On Rock Head
U.S Patent 7,669,673



Please note the BoRH® is compatible with the new and improved Pengo Aggressor only.


Bolt On Rock Head® Kits Contain: Auger Boring Head & Pilot, Wear Caps, Bullet Style Carbide Teeth, Hardware

REPLACEMENT HEADS | TriMax® Weld-On Boring Heads

FEATURES

- Pengo's Tri-Flow® 350 Pilot Bit
- Pengo's Fas-N-Lok® Dirt Teeth
- Diameters from 6" to 48"

ITEM	DIA	NO. TEETH	LBS.	PART NO.
TMOBH-6	6"	2	12	135813
TMOBH-8	8"	4	17	135814
TMOBH-9	9"	4	18	135815
TMOBH-10	10"	4	19	135816
TMOBH-12	12"	4	21	135817
TMOBH-14	14"	6	22	135818
TMOBH-16	16"	6	24	135819
TMOBH-18	18"	6	25	135820
TMOBH-20	20"	6	27	135821
TMOBH-24	24"	8	32	135822
TMOBH-30	30"	10	40	135823
TMOBH-36	36"	12	48	135824
TMOBH-42	42"	16	56	135825
TMOBH-48	48"	18	64	135826

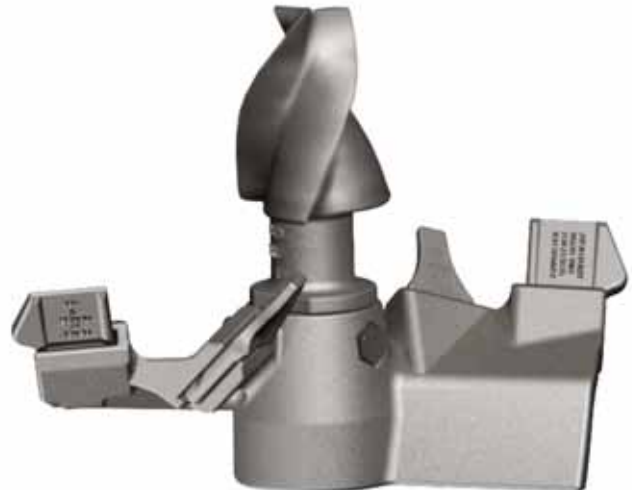

TriMAX
US Patents: 5,476,149

TriMax® Boring Heads: Auger Boring Head & Pilot, 37 Gage and 5T30 Fas-N-Lok® Teeth, and Hardware



REPLACEMENT HEADS | CS AUGER KITS

CS HEAD KITS

CSA heads with weld-on drivlug and CSAT heads with threaded drivlug provide a durable cutting edge featuring replaceable teeth. Any brand of auger can be upgraded.

ITEM	NO. TEETH	LBS.	PART NO.
4-CSA		3.8	553165
6-CSA	1	3.3	553170
7-CSA	1	3.3	553175
8-CSA	2	4.5	553180
9-CSA	2	4.8	553185
10-CSA	2	4.8	553190
12-CSA	2	5.0	553195
16-CSA	5	8.9	553198
18-CSA	2	9.3	553200



CS Head Kits Contain: SB-25 Pilot with Nut & Bolt, Pilot Drivelug, Shank and 35 Series Teeth.

REPLACEMENT HEADS | CS SHANKS AND HEAD PLATES

CS SHANK PLATES



CS shank plates restore augers with worn tooth holders or upgrade augers with serrated edges. Shank plate welds to the underside of auger's bottom plate.

ITEM	LBS.	PART NO.
6/7-CS	1.4	154510
8-CS	2.2	154520
9/10-CS	2.5	154530
12-CS	2.5	154540
18-CS-1	2.9	154550
18-CS-2	4.5	154560

CS HEAD PLATES



CS head plates upgrade any brand of augers.

ITEM	LBS.	PART NO.
6-SC-CSA	1.4	153300
7-SC-CSA	1.6	153301
8-SC-CSA	2.8	153302
9-SC-CSA	3.2	153303
10-SC-CSA	4.3	153304
12-SC-CSA	5.9	153305



ACCESSORIES | REVOLUTION SERIES DRIVES



REVOLUTION DRIVES

Larger, more efficient gearboxes

| Two-piece bail design, top section is removable for easy access to motor

| Single-speed models have efficient Eaton motors | All two-speed models are automatic shift | Added cooling option for all two-speed models

| All models have a crossover pressure relief system which protects the drive

The RevTrak™ system developed by Pengo® is a torque monitoring and logging system using innovative technology such as MMC/SD data logging to measure and record the helical pier/anchor installation



Part No.
610309



Part No.	Model	Connection	Speed Config.	Max Flow (gpm)	Max Pressure (psi)	Torque Low (ft/lbs)	Torque High (ft/lbs)	Speed (rpm)	Recommended Prime Mover							Excavator Size (metric tons)
									Mini Skid Steer	Comp Digger Derrick	Comp Excavator	Skid Steer Loader	Digger Derrick	Backhoe (TLB)	Excavator	
700107	MS-100	R-256	Single	25	3000	0	1149	134	■							
700152	MS-100	H-200	Single	25	3000	0	1149	134	■							
700106	MS-125	R-256	Single	25	3000	0	1378	112	■							
700153	MS-125	H-200	Single	25	3000	0	1378	112	■							
610171	DS-2	H-200	Single	25	3000	0	2356	65		■	■	■				2T - 3T
610267	DS-2	R-256	Single	25	3000	0	2356	65		■	■	■				2T - 3T
610172	DS-3	H-200	Single	25	3000	0	3859	40		■	■	■				2T - 4T
610173	DT-5	H-250	Two	40	3000	2465	4930	50 / 100		■	■	■		■		5T - 8T
610174	DT-15	H-300	Two	50	3000	7738	15478	20 / 40					■	■	■	17T - 25T

CONNECTION SIZES: H-200 = 2" Hex, R-256 = 2 9/16" Round, H-250 = 2 1/2" Hex, H-300 = 3" Hex, H-400 = 4" Hex

Disclaimer:

Output speed and torque specifications are NOT listed at 100% efficiency. Maximum efficiencies have been applied to the torque and speed charts according to the manufacturers recommendations. Speed and torque output are dependant on the overall system efficiencies associated with the prime movers hydraulic system. When the purchaser is determining criteria for specific applications please contact Pengo. Pengo has made every attempt to present accurate and suitable information published on this document. This document should be used for information and comparative purposed only. When application specific information is required, please contact Pengo.

Pengo continually looks for new ways to improve its products. Therefore, Pengo reserves the right to make changes to our products and specifications without notice.



ACCESSORIES | DRIVE MOUNTS for SKID-STEER

LONG REACH MOUNT FOR SKID LOADER

- o Provides maximum ground clearance of 7' to 11' depending model selected.
- o Increases height capability so drillers can use longer auger bits and anchor installers can use longer sections.
- o Unique design optimizes the operators visibility by positioning the Drive up to 48" from the front of the skid loader.
- o Standard retractable stabilizer arms allow the Drive attachment to stand upright when not in use. Improves ability to store, transport and attach to the skid loader.
- o Designed to be used with up to a 12,000 ft/lb Drive.

ITEM DESCRIPTION	PART NO.
Long Reach Universal Skid Mount	661318



SKID LOADER MOUNT ATTACHMENT PLATE

Attachment Plate connects to the mounting plate on the front of the Skid Loader. The Link Arm connects to both the Attachment Plate and the Drive Unit with the supplied connection pins.

ITEM DESCRIPTION	PART NO.
Universal Skid Mount - Standard	661111





PARTS | PILOT BIT ASSEMBLIES

Assemblies include pilot bit, nuts, bolts and teeth if applicable.

TRIFLOW® 350

Patented pilot bit for use with Aggressor® Series, TriMax®, and Ag Max Augers in dirt, abrasive soil, and fracturable rock applications.



ITEM	LBS.	PART NO.
TF-350*	5	135088
TF-350HF*	5.4	135089
TF-350C*	5.4	135090
TF-350CXC*	5.8	135091
TF-350HFTC*	5.5	135092

The TriFlow® 350 Pilot is not sold as an assembly. Bolt and nut must be ordered separately.

3 1/2" HEX BOLT for 6-9" DIA	174447
4" HEX BOLT for 12"+ DIA	174448

SCREW BIT

Screw Bit Pilots for use with CS Augers in dirt, abrasive soil, and fracturable rock applications.



ITEM	LBS.	PART NO.
SB-25	.6	131740
SB-25C	.6	132135
SB-25CXC	.9	132758
SB-25HF	1.5	132266
SB-25HFTC	1.4	132590
SB-30	1.4	131766
SB-30C	1.5	131764
SB-30CXC	1.5	131765
SB-30HF	1.6	132359
SB-30HFTC	1.6	133250
SB-35	1.2	133402
SB-35C	1.2	133403
SB-35CXC	1.2	133404
SB-35HF	2.1	133405
SB-35HFTC	2.8	133406
SB35SQ	2.8	136809
SB35SQ HF	4	136816
SB-45	3.0	133407
SB-45C	3.1	133408
SB-45CXC	3.3	133409
SB-45HF	3.2	133410
SB-45HFTC	3.2	133411

SCREW BIT

3 1/2" screw bit pilot for use with Ag Aggressor® Augers in dirt applications.



ITEM	LBS.	PART NO.
SB35 [S175]	3.9	151318

ROCK RIPPER®

For Use with Severe Rock Ripper® Augers and GP Quick Change auger system in hard rock applications.



ITEM	LBS.	PART NO.
RR-API/C20	14.9	157405
RRP-API RR	14.9	137210
RR-1.75 SQ	15	137208

TUNGSTEN CARBIDE HEAD

For Use with Step Rock Augers.



ITEM	LBS.	PART NO.
375-TCH-M	5.1	132173

DESCRIPTIONS

HF	=	Hard-Faced
C	=	Carbide Tipped
CXC	=	Carbide
HFTC	=	Hard-Faced, Carbide
SB-25	=	2 1/2"
SB-30	=	3"
SB-35	=	3 1/2"
SB-45	=	4 1/2"

NUTS & BOLTS

ITEM	LBS.	PART NO.
5/16" X 1 1/2"	.2	151660
5/8" X 1 1/2"	.2	151640
3/8" X 3"	.2	151672





PARTS | RELACEMENT TEETH

40/50 DIRT

For Use with Aggressor® Series Augers in ordinary dirt, abrasive and frozen soil.



ITEM	LBS.	PART NO.
40/50 DIRT	.5	134501
40/50C	.5	134519
40/50HFF	.5	134802
CARRIAGE BOLT	.2	134677
NUT HEX LOCK	.1	134527

BORH

Pengo's proprietary P21-RR bullet tooth is for with the BoRH® in solid fracturable rock and compacted soil.



ITEM	LBS.	PART NO.
P21-RR	.6	850019

ROCK RIPPER®

The New STRATA SR-76 conical tooth is for use with Severe Rock Ripper® Augers in solid fracturable rock and compacted soil.



ITEM	LBS.	PART NO.
SR-76SW	.5	850035
SRL-08	.5	850032

Note: SRL08 is not a STRATA Series Tooth but is compatible with the Rock Ripper Augers.

DRAG-STYLE

Carbide tooth for use with GP Step Rock Augers in hard rock applications.



ITEM	LBS.	PART NO.
CB-10	.8	140055

FAS-N-LOK® DIRT



Fas-N-Lok Dirt teeth eliminate the need for RubRLok. Just remove old teeth and pop on the Fas-N-Lok teeth.



ITEM	SOIL TYPE	LBS.	PART NO.
1336L C	Abrasive, Frozen	.6	140016
35 DIRT	Ordinary Dirt	.4	133835
35-C	Compacted Rock, Abrasive, No Impact	.4	140007
35-HF	Abrasive, Impact	.6	140008
35-HFF	Abrasive, Impact	.6	140009
37 GAGE	Dirt		140027
37-HF GAGE	Abrasive, Impact	.6	140010
5T30	Loose Rock, Abrasive, No Impact	.4	140029
5T30-C	Compacted Rock, Abrasive, No Impact	.4	140012
5T30-HF	Rock, High Impact	.5	140014
RB-36L C	Abrasive, Frozen	.7	140021
RB-56		1.4	140022
RB-58C GAGE		1.2	140015
RB5T-30		.4	140013

Due to varying manufacturing tolerances RubRLok may be necessary to obtain the correct fit.

PARTS | HOLDERS

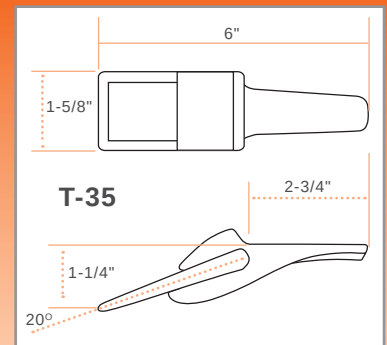

T-35 and T-36

Cast alloy steel holders used with 35 series teeth can upgrade or repair any brand of auger.


ITEM	LBS.	PART NO.
T-35 Angled	1	171221
T-36 Straight	.5	171231



P-10 and H-10

Cast alloy steel holders used with Rock Ripper, BoRH, and CB-10 Teeth.

ITEM	LBS.	PART NO.
P-10	.8	990043
H-10	.3	157025



TOOLS

ITEM	LBS.	PART NO.
SOFT HAMMER	3.5	137737
DRIFT PUNCH	.8	137750
RUBR-LOK	.1	137601





PARTS | HUBS and HUB ADAPTERS

HEX HUBS

Cast alloy hubs used to upgrade or repair any brand of auger.



SQUARE HUBS

Cast alloy hubs used to upgrade or repair any brand of auger.



ROUND HUBS

Cast alloy hubs used to upgrade or repair any brand of auger.



ITEM	SIZE	LBS.	PART NO.
RH-1375	1 3/8"		133156
RH-812	13/16"	.6	153955
RH-1625	1 5/8"	3.1	153958
H-200U	2" UNIVERSAL	10.5	154121
H-250	2 1/2" SLOTTED	19.7	154141
H-262	2 5/8" SLOTTED	17.6	154151

ITEM	SIZE	LBS.	PART NO.
OMA	1"		137298
PDB-525	1" SLOT		153906
7/8"	GROUND HOG	.6	153964

ITEM	SIZE	LBS.	PART NO.
	1" GENERAL	1.4	153967
R-200	2" CAST	5.2	154080
R-256	UNIVERSAL	9.5	154115

DRIVELUGS

Cast alloy drivelugs used with screw bits can upgrade or repair any brand of auger.



HEX FEMALE



ROUND MALE

FEMALE HEX ADAPTERS

ITEM	LBS.	PART NO.
H-200F X R256M		134211
H-200F X R-200M	14	557156
H-250F X H-200M	30	132419
H-225F X H-200M	20	557159

FEMALE SQUARE ADAPTERS

ITEM	LBS.	PART NO.
S-250F X S-300M	41	133914

FEMALE ROUND ADAPTERS

ITEM	LBS.	PART NO.
R-100F X R-7/8M		133305
R-100F X S-7/8M		133304
R-200F X H-200M	13	132804
R-200F X H-225M	13	132805
R-200F X R-256M	15	134210
R-256F X H-250M	21	133906
R-256F X R-200M	13	132068
R-256F X S-200M	19	557155
R-256XH-200M	18	557153

More adapters available. Contact customer service for more information.

DRIVE PINS



ITEM	LBS.	PART NO.
DP-2	.1	157779
DP-3	.1	157780
DP-4	.3	157781
DP-5	.5	157782

PINS




ITEM	LBS.	PART NO.
P-10 Pin	.1	137610



PARTS | EXTENSIONS

CS TELESCOPING

For adapting
PENGO
Standard Auger
to any hand held
earth drill.



ITEM	LBS.	PART NO.
G-1.00R X 24 GENERAL		557091
G-1.375HX24 GENERAL		557092
LB-1.25SX24 LIT BEAVER		557093
GH-.875SX24 GROUND HOG		557094
PC-1.31R X12 PENG0 COLLAR		557095
PC-1.687RX24 PENG0 COLLAR		557096
PC-1.687RX36 PENG0 COLLAR		557097

NOTE: Augers used with CS Extensions must be ordered with PENG0's CS collar (part no. 158065).

2" HEX TELESCOPING

ITEM	LBS.	PART NO.
HE20-12 STANDARD	22	557142
HE20-24 STANDARD	34	557143
HE20-36 STANDARD	46	557144
HE20-48 STANDARD	58	557145
HE20-60 STANDARD	70	557146
HE20-72 STANDARD	82	557147

2 9/16" ROUND FIXED



ITEM	LBS.	PART NO.
RE25-12 STD FIXED	20	134203
RE25-24 STD FIXED	31	134204
RE25-36 STD FIXED	40	134205
RE25-48 STD FIXED	50	134206
RE25-60 STD FIXED	61	134207
RE25-72 STD FIXED	72	134208

2" ROUND FIXED

ITEM	LBS.	PART NO.
RE20-12		557176
RE20-72		557177
RE20-24		557178
RE20-36		557174
RE20-48		557179

EXTENSION BARS

ITEM	LBS.	PART NO.
2" HEX X 72" STD HOLES		137570
2-5/8" HEX X 72" STD HOLES		137572
H-250 X 72" STD HOLES		137571
H-200 X 72" HEX BAR		151125
H-225 X 72" HEX BAR		151126
H-250 X 72" HEX BAR		151127
H-262 X 72" HEX BAR		151128

sales contacts

Eric Hennarichs, Regional Sales Manager, East
317.286.8386 ehennarichs@paladinbrands.com


Gerry Logan, Regional Sales Manager, West
515.302.0206 glogan@paladinbrands.com

Brad Blackstone, Regional Sales Manager, South
972.489.7361 bblackstone@paladinbrands.com

Mary Pohlman, Sales Product Specialist
319-491-7943 mpohlman@paladinbrands.com

Dawn Jamison, Manager, OEM & Sales Admin.
319.210.6895 djamison@paladinbrands.com

Dana Scudder, VP Sales & Marketing
561.400.9311 dscudder@paladinbrands.com

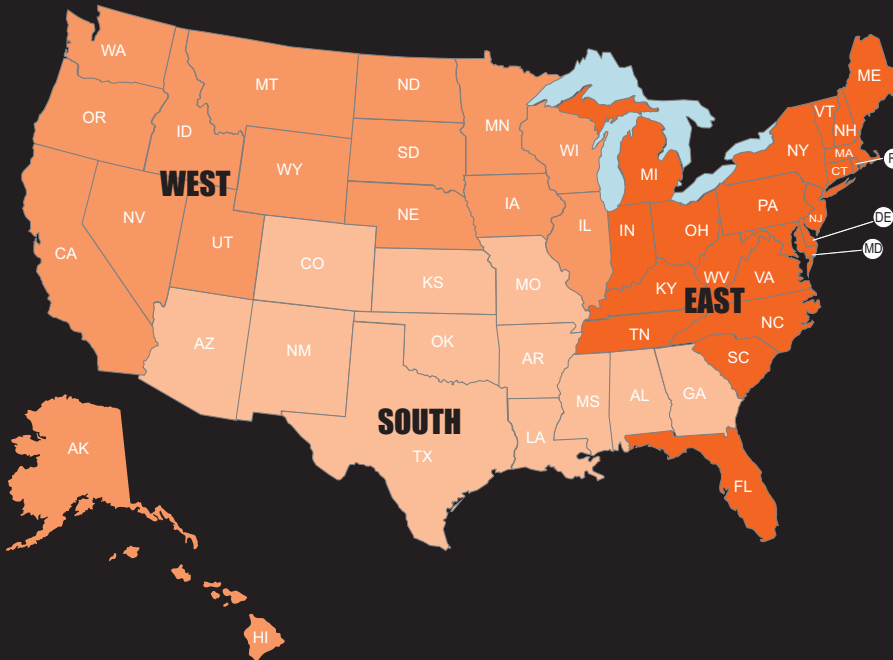

Pengo Limited Warranty

Products manufactured by Pengo wear and are expendable in their function. Wear and tear and occasional breakage must, therefore, be expected.

Pengo products are warranted from defects in material and workmanship for a period of Sixty (60) Days from the date of invoice. Pengo will either replace or credit the defective part at it's option. Any labor and/or material required to remove or install parts is excluded under this Limited Warranty. Products that have been misused, misapplied, hardfaced, improperly welded, or otherwise installed contrary to instructions and specifications are not covered by this Limited Warranty.

Pengo reserves the right to make design, specification and prices changes without notice and obligations to the affect of such changes.

Pengo makes no other warranty. All other warranties, whether express, implied or statutory, such as warranties of merchantability of fitness for a particular purpose, are hereby excluded and disclaimed to the extent that they exceed the warranties expressly granted in this limited warranty. In no event shall Pengo be liable for consequential or incidental damages. Whether direct or indirect, claimed by the customer and/or any third parties.

Returns and Claims

1. Pengo reserves the right to determine whether products claimed to be defective shall be inspected by our personnel in the field or returned to the factory. If judged by Pengo to be defective in material or workmanship, the product will be replaced or a credit issued at the option of Pengo.
2. Upon notification of defect, Pengo's Inside Sales Department will issue a Return Goods Authorization number (RGA). All returns for replacement or credit MUST be accompanied by a RGA number. Products returned without a RGA number will be rejected and returned to the sender freight collect.
3. All returns must be shipped "prepaid". Products shipped "collect" will be refused. Proof of purchase such as invoice number must accompany returns.
4. Slow moving dealer inventory may be returned once per calendar year. The net value cannot exceed 5% of the previous year's purchases. A 20% re-stocking charge will apply to the net value or returned products. All returns must be of current manufacture and in un-used condition. Rusty or custom painted products will not be accepted for return.



Distributed By:



Website

Scan these QR codes with your smart phone and gain instant access to our web site or call us automatically.

Not familiar with QR codes? Simply go to www.inigma.mobi on your mobile device. I-nigma will automatically identify your smart phone and install the code reader.



Phone

PENGO
500 EAST HIGHWAY 10
LAURENS, IA 50554
PH: 800.599.0211 OR 712.845.2540
FX: 712.845.2497
WWW.PENGOATTACHMENTS.COM
PENGOSALES@PALADINBRANDS.COM

© COPYRIGHT 2012 PENGO

