

HEADACHE RACK HARNESS




BROWN WIRE WITH ORANGE BAND

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
F	CHANGE POWER CONNECTOR	4/17/2017	
G	ADD CHECK BOXES TO BOM & OPTIONAL POWER CONNECTOR	8/16/2017	
H	CHANGE RING TERMINAL	6/26/2018	
J	ADD EL-PL-WL WIRE	2/25/2021	
K	ADDED EL-PL-WL PIGTAIL / UPDATED INSTRUCTION FOR USE OF NEW PART	8/25/2026	

CONNECT TO YELLOW WIRE OF HYDRASTX HARNESS

CONNECT TO HYDRABED WHITE WIRE W/ ORANGE

EL-PL-WL WIRE

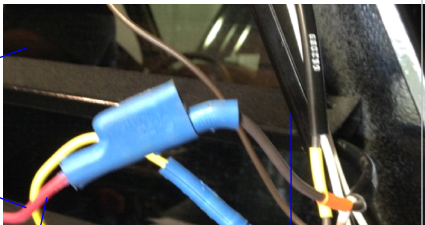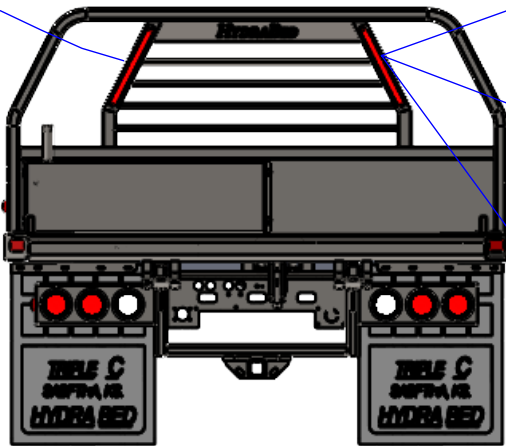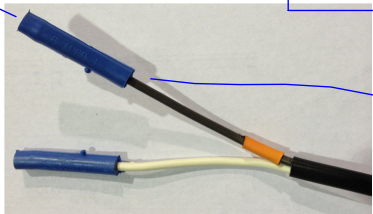


RED WIRE WITH BROWN WIRE WITH ORANGE BAND

EL-STL69RB-LED STRIP STRIP LIGHT (NOT INCLUDED)


LIGHT BLACK WIRE WITH MALE BULLET

NOTES:

1. Remove EL-STL69RB-STRIP LIGHT.
2. Route both the work light black and white wires through the top hole.
3. Crimp the black wire from the work light to the black wire with orange heat shrink on the supplied pigtail. Shrink this butt connection
4. Crimp the white wire from the work light to the white wire on the supplied pigtail. Shrink this butt connection
5. Use bullet conector on pigtail with orange heatshrink to plug into the headache harness brown wire with orange heatshrink.
6. Locate the conection for the white wire coming off of the strip light. Unplug this bullet. Plug male bullet from pigtail into this location. Then plug strip light wire into female bullet on pigtail.
7. Route the rest of the wires to match the diagram
8. Reinstall headache rack EL-STL69RB-STRIP LIGHT.
9. Triple C recommends using upfitter switches if available.
10. Triple C recommends using a keyed switch circuit for power.

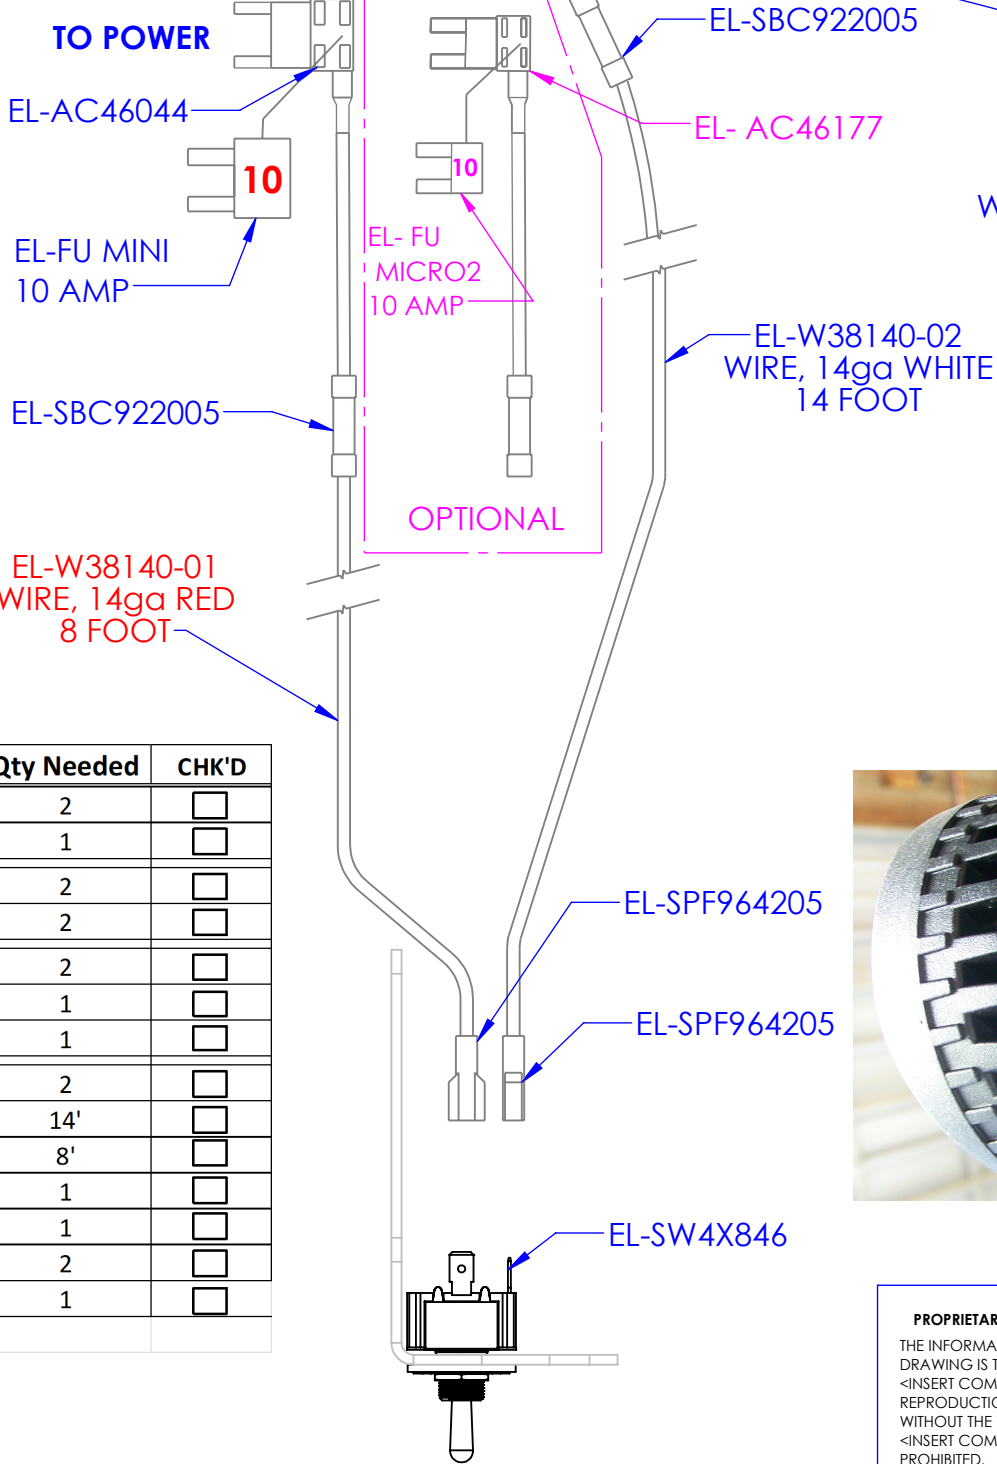

Item ID	Item Description	Qty Needed	CHK'D
EL-SBC922005	BLUE SHRINK CONNECTOR	2	☐
EL-AC46044 ASY	MINI FUSE CIRCUIT, 16 GA	1	☐
EL-SBM962075	BULLET SHRINK MALE	2	☐
EL-SPF964205	HEATSHRINK PUSH-ON F .250	2	☐
EL-SRT852565	RING 5/16 SHRINK INSULATED	2	☐
EL-SW4X846	SPST TOGGLE SWITCH	1	☐
EL-SWP2X642	ON/OFF TOG SW PLATE	1	☐
EL-WL-6-LED WORKLIGH	LED WORK LIGHT	2	☐
EL-W38140-02	14 GA WIRE, WHITE	14'	☐
EL-W38140-01	14 GA WIRE, RED	8'	☐
FP-TWL-100	TAB, WORK LIGHT	1	☐
EL-AC46177 ASY	MICRO2 FUSE CIRCUIT, 16 GA	1	☐
EL-PL-WLPIGTAIL	WORK LIGHT PILLAR PIGTAIL	2	☐
EL-PL-WL WIRE	18" WIRE WITH WEATHERPACK	1	☐

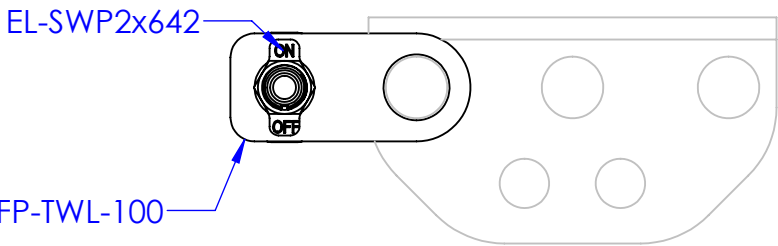

SWITCH MOUNT ON HYDRA BED DASH BRACKET. HOLD IN PLACE WITH BACK NUT OF CONTROL CABLE

Checked by _____ Date _____

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <INSERT COMPANY NAME HERE>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <INSERT COMPANY NAME HERE> IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL $\pm 1/16$
ANGULAR: MACH ± 1 BEND $\pm$
TWO PLACE DECIMAL ± 0.10
THREE PLACE DECIMAL ± 0.005
MATERIAL
DO NOT SCALE DRAWING

DRAWN		NAME	TYLER	DATE	8/31/2026	P.O. BOX 248, SABETHA KS. 66534 (785) 284-3674 FAX (785) 284-3931	
PART #		ASM #		OP-KWL-LED-HR		TRIPLE C INC.	
COMMENTS:		SWITCH SCHEMATIC, LED WORK LIGHT KIT		SIZE	B	DWG. NO.	90-0402
				SCALE: 1:1	WEIGHT:	REV	K
						SHEET 1 OF 1	