



This drawing contains confidential proprietary information of Triple C, Inc. and is subject to return upon request. The furnishing of this drawing is not to be construed as the grant of any license, express or implied, to manufacture, have manufactured, use or sell the structures shown hereon.

CYLINDER SPECS

WORKING PRESSURE:	2500 PSI	BORE:	2.500
OPERATING TEMP:	-40°F TO 200°F	ROD DIA:	1.125
FINISH:	GLOSS BLACK	STROKE:	6.000
ROD FINISH:	HARD CHROME		

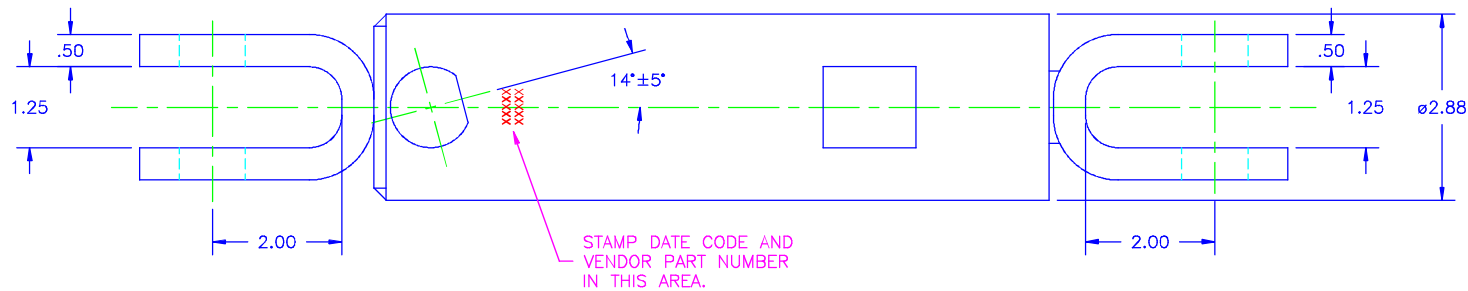

CYLINDER PRESSURE RATING	2,500 PSI
OPERATING TEMPERATURE RANGE	-40°F TO 200°F
MINIMUM STRUCTURAL SAFETY FACTOR	1.2:1
MINIMUM WALL BURST PRESSURE	10,800 PSI
MAXIMUM RECOMMENDED ROD SPEED	100 FT/MIN
MINIMUM RECOMMENDED ROD SPEED	5 FT/MIN

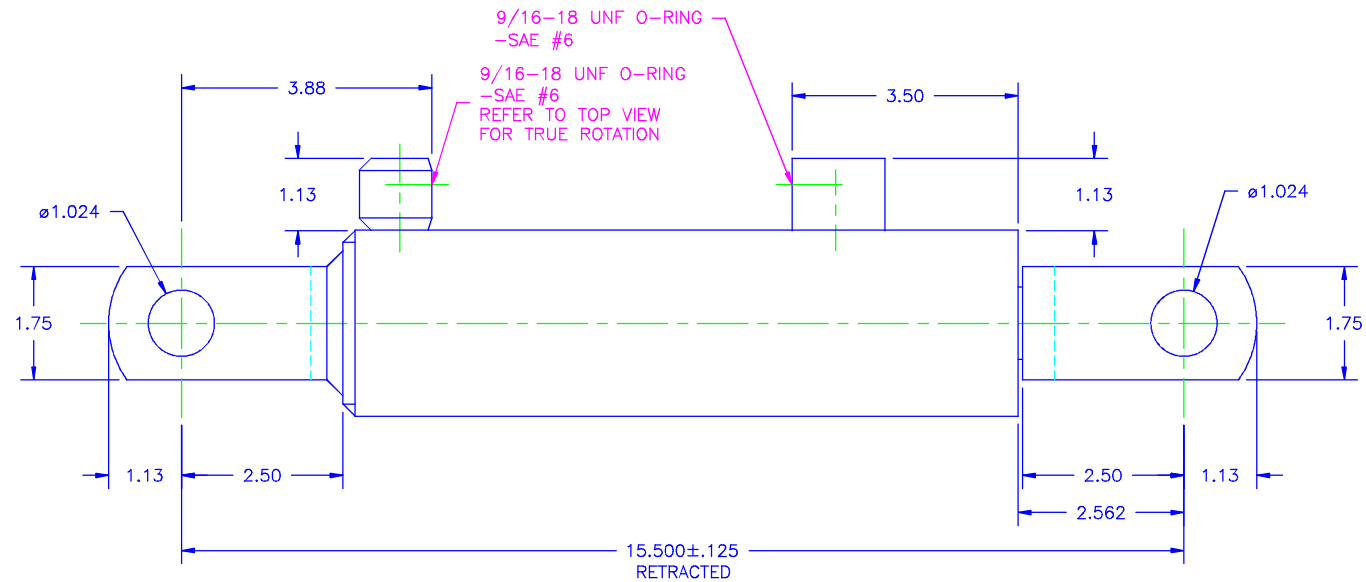

NOTE:
CYLINDER TO REPHASE AT FULL EXTENSION.

TRIPLE C, INC. P.O. BOX 248, Sabetha, KS 66534 (785) 284-3674 FAX (785) 284-3931			
MATERIAL:			
DWG PATH: \DWG\CY			
DO NOT SCALE DRAWING	SHEET 1 OF 1	SCALE: 1/2	DRAWN BY: CEDRIC HEINGER 09/23/97
TOLERANCES Unless otherwise specified	TITLE: REPHASING HYDRAULIC CYLINDER PASSENGER SIDE, BD 2200		
XX .02	DRAWING NUMBER: BD250-PA		
XXX .005	REV X		
XXXX .0005	DATE		
X/X 1/32			
ANGLE 0°30'			