
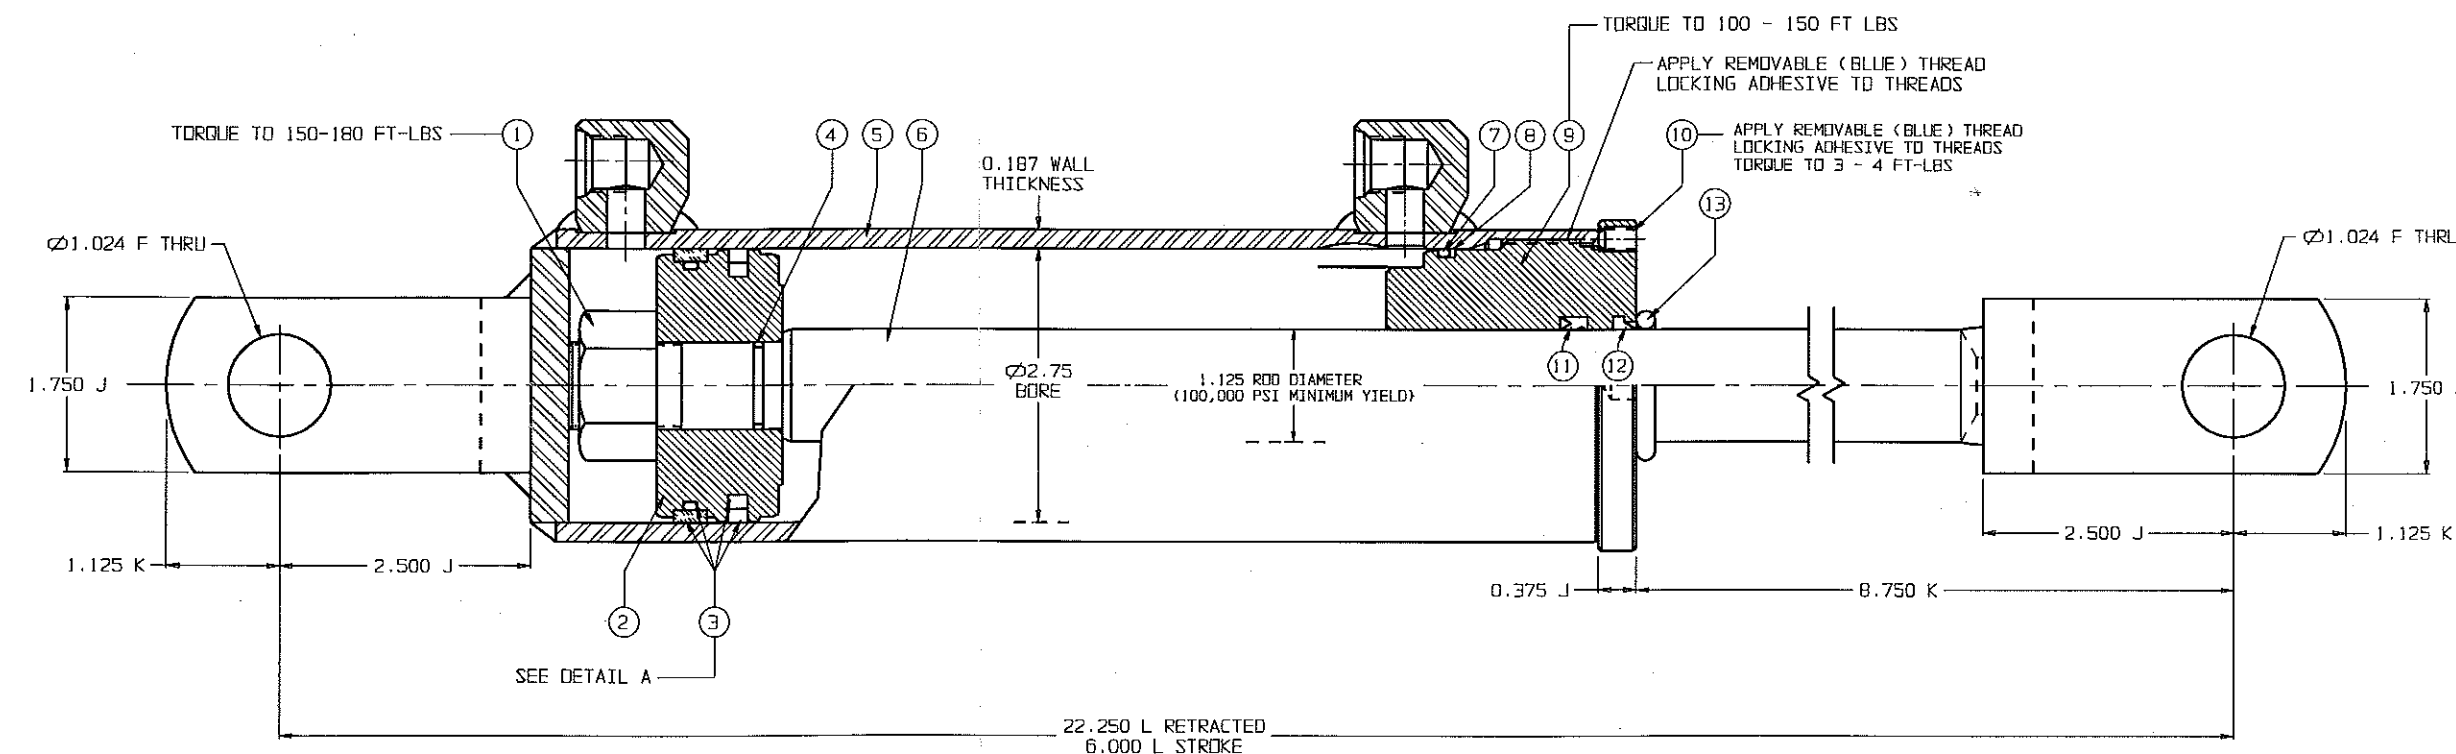
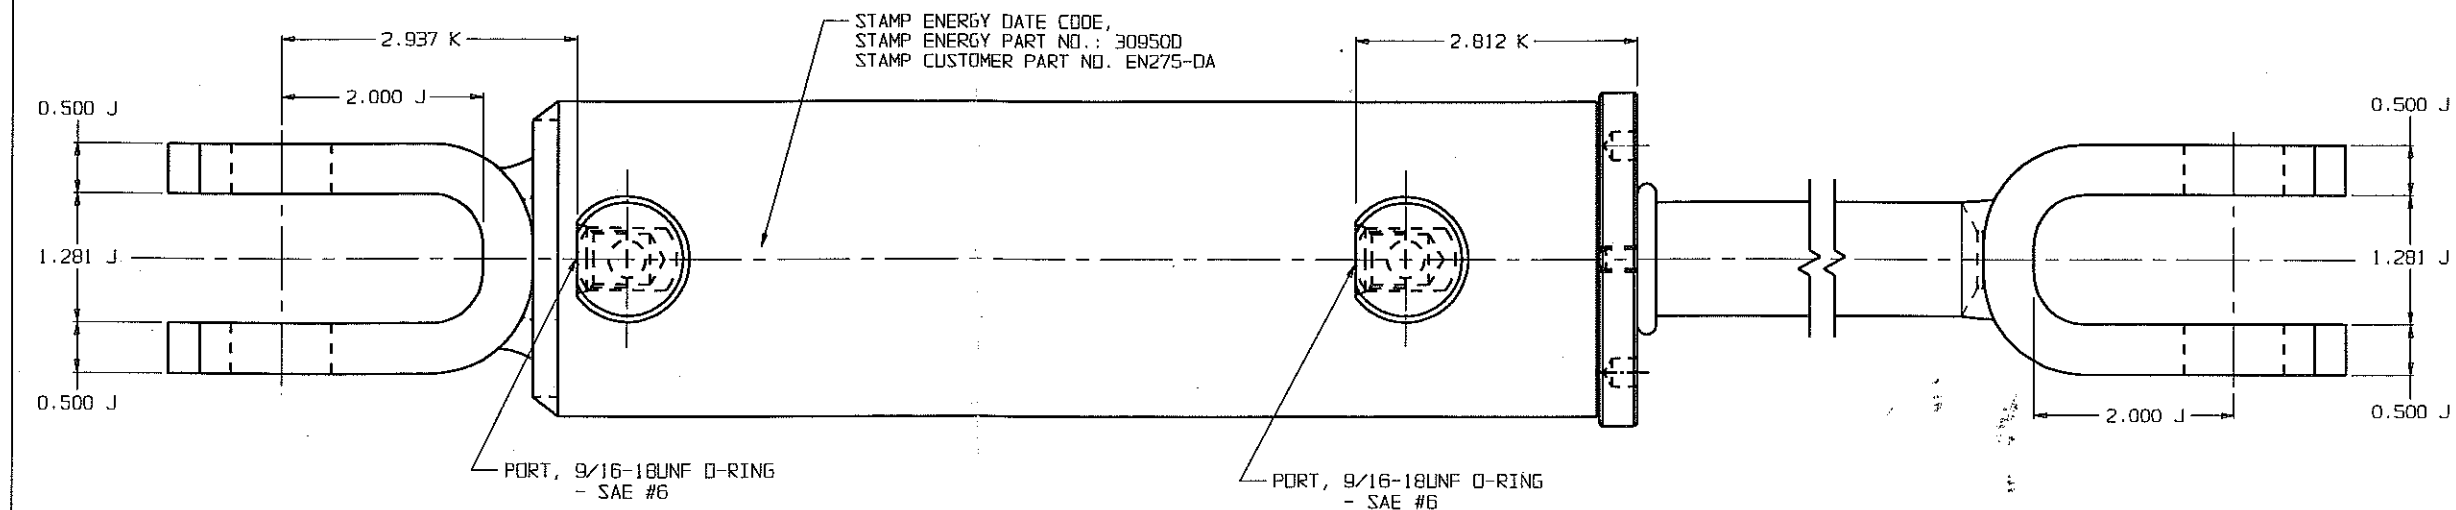


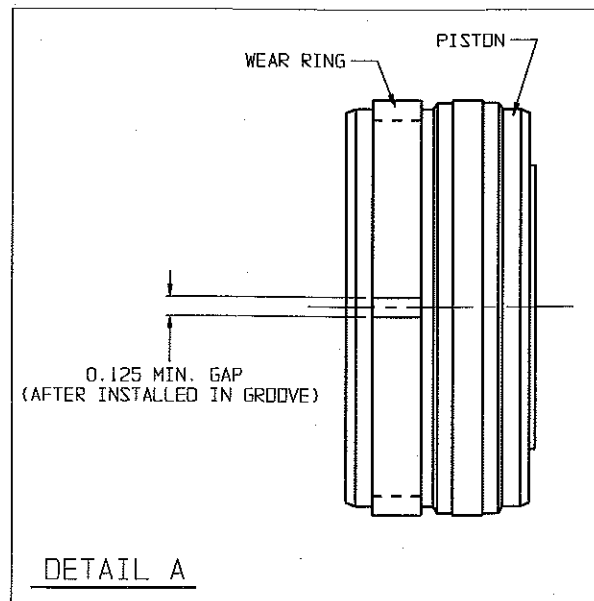

CYLINDER RATING

CYLINDER PRESSURE RATING	3,000 PSI
OPERATING TEMPERATURE RANGE	-40 F TO 200 F
MINIMUM STRUCTURAL SAFETY FACTOR	2:1
MINIMUM WALL BURST PRESSURE	10,810 PSI
MAXIMUM RECOMMENDED ROD SPEED	100 FT/MIN.
MINIMUM RECOMMENDED ROD SPEED	5 FT/MIN.
*** ROD SPEEDS UNDER 5 FT/MIN MAY CAUSE SEAL NOISE DUE TO STICK/SLIP.	
RECOMMENDED MAXIMUM COLUMN LOAD AT FULL EXTENSION WITH 2:1 SAFETY FACTOR, NO SIDE LOAD, PINNED ENDS AND NO INTERMEDIATE BRACING	15,065 LBS (2,560 PSI)

BORE :	2.750	STOP TUBE :	0
ROD. DIA. :	1.125	FINISH :	55/65 BLACK
STROKE :	6.000	ROD FINISH :	HARD CHROME

SEAL KIT: 30953X

PINS: NOT FURNISHED

NOTE: 1) CYLINDER WILL REPHASE AT THE END OF THE EXTEND STROKE.
TWO SLOTS ON GROOVED END OF CYLINDER.

309500 REPLACES 0309500

TRIPLE C. MFG.
PART NO.: EN275-DA

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
Letters after dimensions defines
tolerances as follows:
A 1/4-0.0015 B 1/4-0.010
C 1/4-0.0005 D 1/4-0.020
E 1/4-0.001 F 1/4-0.020
G 1/4-0.002 H 1/4-0.025
I 1/4-0.001 J 1/4-0.020
K 1/4-0.002 L 1/4-0.025
M 1/4-0.001 N 1/4-0.020
O 1/4-0.002 P 1/4-0.025
Q 1/4-0.001 R 1/4-0.020
S 1/4-0.002 T 1/4-0.025
U 1/4-0.001 V 1/4-0.020
W 1/4-0.002 X 1/4-0.025
Y 1/4-0.001 Z 1/4-0.020

Material:
Finish:
Drum by:
SA 07.25.06

Checked by:

Approved By:

SA 07.25.06

01

01

01

01

01

01

01

01

01

01

01

01

01

01

01

01

01

01