

Product Details


These 3000 PSI cylinders are available in bore sizes from 2" to 5" and stroke sizes from 4" to 60". ChiefTC3 cylinders are backed by a 4-year limited warranty and are ideal for construction and agricultural applications.

- **Intended Use:** Double-acting applications
- **Piston:** Ductile iron
- **Gland:** Ductile iron, drilled oil passages
- **Tube:** Precision honed steel
- **Rod:** Hard chrome plated
- **End Mounts:** High strength, ductile iron female clevises with pins and R-clips included
- **Tube Seal:** Buna O-ring with Polytemp hytrel backup
- **Rod Seal:** Twin lip design for a dry rod
- **Rod Wiper:** D style prevents contamination
- **Piston Seal:** Hallite 755 for prolonged wear resistance (Wear ring on 5 bore)
- **All Seals:** Manufactured to US specifications
- **Ports:** SAE O-ring
- **Paint:** Red, unless otherwise indicated. Custom colors are available.
- **Packaging:** Individually poly bagged.


Dimensional Data In Inches (Millimeters)

Bore	A	B	C	E	G	H	I	J	M	P	Q	R	S	T	V
3 (76.20)	10.25 (260.35)	0.188 (4.78)	SAE 8 3/4-16	2.5 (63.50)	2.717 (69.01)	1.125 (28.58)	1.125 (28.58)	2.125 (53.97)	2 (50.80)	0.425 (10.80)	1 1/4-12 UNF	1.015 (25.78)	1 (25.40)	1.132 (28.75)	4.062 (103.17)

Retracted length is 12.250 (311.2) for 8.000 (203.2) stroke ASAE cylinders and 15.500 (393.7) for 16.000 (406.4) stroke ASAE cylinders. Pin hole diameter is 1.265 (32.1) for 16.000 (406.4) stroke ASAE cylinders. 218-186, 187 with Nitro Chrome Rod

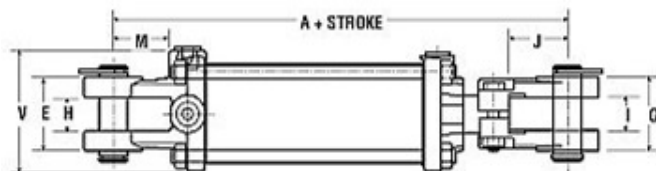

[Click to enlarge.](#)

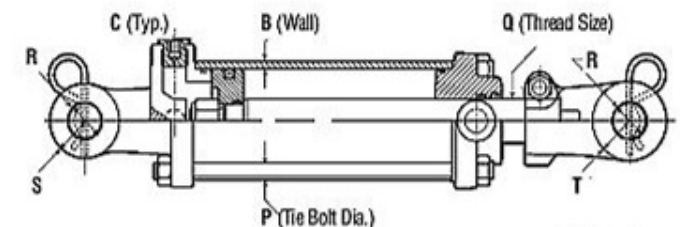

[Click to enlarge.](#)