


This drawing contains confidential proprietary information of Triple C, Inc. and is subject to return upon request. The furnishing of this drawing is not to be construed as the grant of any license, express or implied, to manufacture, have manufactured, use or sell the structures shown hereon.

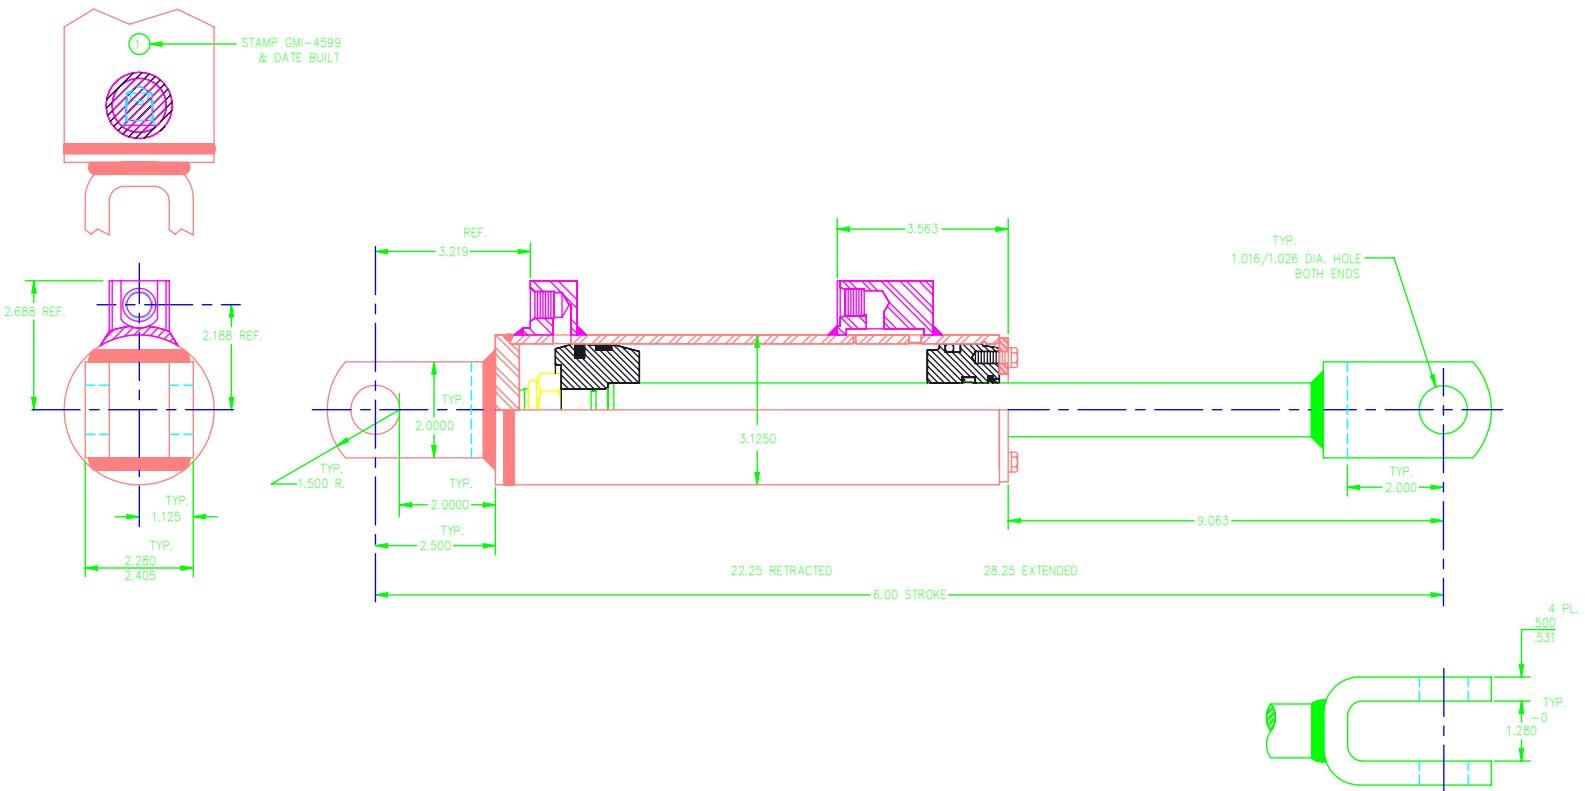

- NOTES:
- 1. 1.1250 DIA. HARD CHROME PLATED ROD
 - 2. .563-18 SAE NO. 6 O-RING PORTS
 - 3. REPHASING ORIFICE DIA. = .046
 - 4. 3000 PSI MAXIMUM OPERATING PRESSURE
 - 5. SEAL KIT NO. 44-4599-S INCLUDES ITEMS 3,4,5,7,11,12,16 & 17 & (1) 27-969-0
 - 6. SAFETY FACTORS BELOW 2:1 AT 3000 PSI -
ROD PINEYE = 0.90:1
BASE PINEYE = 0.90:1
 - 7. STATIC TEST AT 3500 PSI IN BOTH DIRECTIONS
 - 8. PAINT GLOSS BLACK

TRIPLE C, INC.			
P.O. BOX 248, SABETHA, KS 66534 (785) 284-3674 FAX (785) 284-3931			
MATERIAL: X			
DWG PATH: \DWG\			
DO NOT SCALE DRAWING	SHEET 1 OF 1	SCALE: X:X	DRAWN BY: CHRIS ABERLE X
TOLERANCES Unless otherwise specified XX .010 XXX .005 XXXX .0005 X/X 1/32 ANGLE 0°30'	TITLE: CYLINDER, DRIVER SIDE, 2.750 BORE		
DRAWING NUMBER: GR275-DA			REV