



**Baileynet.com**  
1-800-800-1820


▶ Request a catalog or download PDF

▶ Quick Load To Cart By Bailey No. 

Login

 **Cart Contains (0) Items**

What can we help you find today?

Search 

HOME

PRODUCTS


CUSTOM PRODUCTS


FAQ

CONTACT

BAILEYNET.COM > PRODUCTS > STANDARD CYLINDERS

# Chief TC3 Hydraulic Cylinders





Availability: **On Order** (Estimated Avail.: March 11, 2013)

Price Each/Quantities of:

1 - 9

\$114.00

10 - UP

\$108.00

BUY

These 3000 PSI cylinders are available in bore sizes from 2" to 5" and stroke sizes from 4" to 60". ChiefTC3 cylinders are backed by a 4-year limited warranty and are ideal for construction and agricultural applications.

BORE	2 1/2" Bore - 3000 PSI	COLUMN LOAD	14720 lbs.
STROKE	10"	PORT SIZE	SAE 8
ROD DIA	1 1/8"	PIN DIA	1"
RETRACTED	20 1/4"	SHIP WT.	22
EXTENDED	30 1/4"	BAILEY NO	211-324

Product Details


These 3000 PSI cylinders are available in bore sizes from 2" to 5" and stroke sizes from 4" to 60". ChiefTC3 cylinders are backed by a 4-year limited warranty and are ideal for construction and agricultural applications.

- **Intended Use:** Double-acting applications
- **Piston:** Ductile iron
- **Gland:** Ductile iron, drilled oil passages
- **Tube:** Precision honed steel
- **Rod:** Hard chrome plated
- **End Mounts:** High strength, ductile iron female clevises with pins and R-clips included
- **Tube Seal:** Buna O-ring with Polytemp hytrel backup
- **Rod Seal:** Twin lip design for a dry rod
- **Rod Wiper:** D style prevents contamination
- **Piston Seal:** Hallite 755 for prolonged wear resistance (Wear ring on 5 bore)
- **All Seals:** Manufactured to US specifications
- **Ports:** SAE O-ring
- **Paint:** Red, unless otherwise indicated. Custom colors are available.
- **Packaging:** Individually poly bagged.


Dimensional Data In Inches (Millimeters)

Bore	A	B	C	E	G	H	I	J	M	P	Q	R	S	T	V
2.5 (63.50)	10.25 (260.35)	0.188 (4.78)	SAE 8 3/4-16	2.38 (60.45)	2.5 (63.50)	1.125 (28.58)	1.125 (28.58)	2.125 (53.97)	2 (50.80)	0.35 (8.89)	1 1/8-12 UNF	1.015 (25.78)	0.945 (24.00)	1 (25.40)	3.312 (84.12)

Retracted Length is 12.250 (311.2) for 8.000 (203.2) stroke ASAE cylinders and 15.500 (393.7) for 16.000 (406.4) stroke ASAE cylinders. Pin hole diameter is 1.265 (32.1) for 16.000 (406.4) stroke ASAE cylinders.



Click to enlarge.

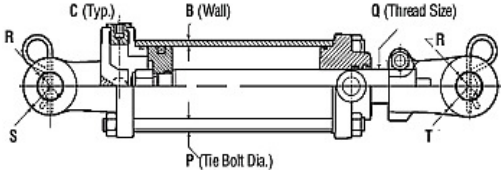

Click to enlarge.

**About Bailey**

New s

Company Overview

OEM Services

Hydraulic Cylinders

Quality & Testing

Business Hours

Careers

**Shopping Information**

How To Order

Payments

Shipping & Delivery

Returns

Warranty

**Bailey Account**

Login

Order History

Open Orders

Track My Order

My Invoice

Edit Account Info

My Sales Tools

Shopping Cart





**Find Us On**


Bailey Facebook

Bailey Twitter

Bailey YouTube

Bailey LinkedIn





baileynet.com/hydraulics/standard\_hydraulic\_cylinders/?dnfwd=1&page=Details&line=TC3&baileyno=2...

1/1