


JAD-6234A 1800 R.P.M. 3/8" REVERSIBLE DRILL

CE (TWO GEAR)

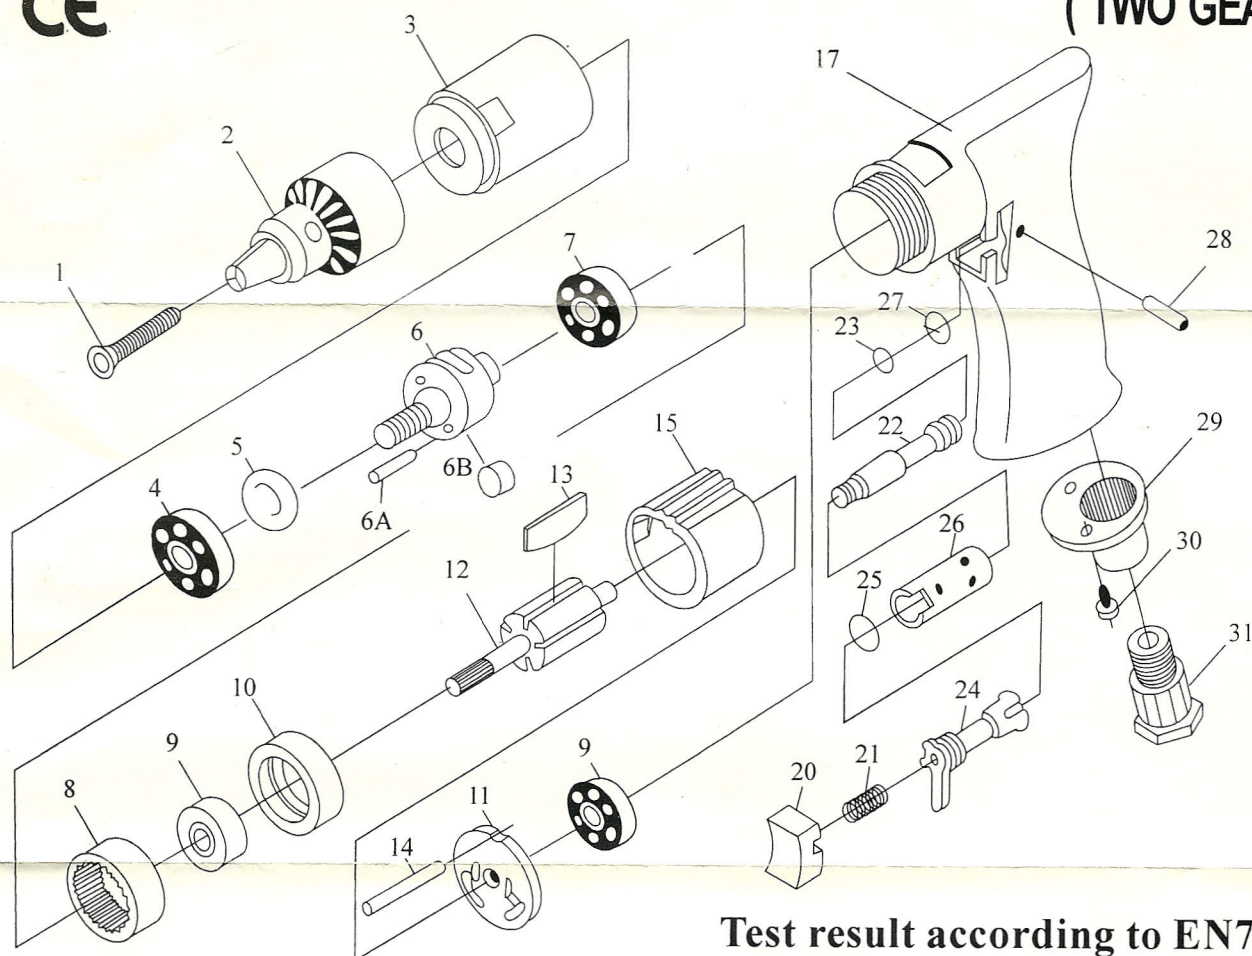

IMPORTANT! READ CAREFULLY BEFORE OPERATING THIS TOOL. FAILURE TO OPERATE ANY POWER TOOL PROPERLY CAN RESULT IN PERSONAL INJURY AND/OR PROPERTY DAMAGE.

SPECIFICATIONS :

(3/8" REVERSIBLE AIR DRILL)

Chuck Size.....3/8"
 Speed(RPM).....1800
 Spindle Thread.....3/8"-24
 Overall Length.....7-1/2"
 Net Weight.....3 lbs.
 Average Air Consumption.....4CFM

Test result according to EN792-3

Vibration EN 28662-1	Noise ISO 3745:1995(E)	Remark
Load: 0.2m/s ²	Sound pressure level 92.0dB	Should wear an approved ear-protector and gloves while operating tool.
	Sound power level 102.5dB	
	Instantaneous sound pressure 108.0 dB	

Index No.	Ref.No.	Description	Q'ty
1	S5-5020B	Screw (M5x20)	1
2	305002	Drill Chuck (3/8")	1
3	305T003	Gear Housing	1
4	BB-R62	BALL BEARING (R6ZZ)	1
5	317027	WASHER	1
6	317024	GEAR CAGF	1
6A	317026	PIN (φ 3x17.8)	2
6B	317025	GEAR	2
7	BB-R82	BALL BERARING (R8ZZ)	1
8	317029	INTERNAL GEAR	1
9	BB-06082	BALL BEARING (608ZZ)	1
10	305T010	Bearing Case	1

Index No.	Ref.No.	Description	Q'ty
11	305011	End plate	1
12	305T012	Rotor	1
13	302025	Rotor Blade	5
14	305014	Motor Pin (φ 2x55)	1
15	305015	Cylinder	1
17	305017	Motor Housing	1
20	305020	Trigger	1
20A	SS-0408A	Set Screw (M4x8)	1
21	305021	Valve Spring	1
22	305022	Throttle Valve	1
23	ORP-0035	"O" Ring (φ 3.5x1.5)	1
23A	317005	"O" Ring (3.9x2.25x2)	1

Index No.	Ref.No.	Description	Q'ty
24	305024	Reverse Valve	1
25	ORP-0090	"O" Ring (P9)	1
26	305026	Reverse Valve Bush	1
27	ORP-0140	"O" Ring (P14)	1
28	SP-25220	Pin (M2.5x22)	1
29	305029	Exhaust Deffuser	1
30	I1-3008B	Screw (M3x8)	2
31	305031	Air Inlet	1
32	305032	KEY	1
33	305033	Keyless chuck	1