


3-Point Hitch Dimensions

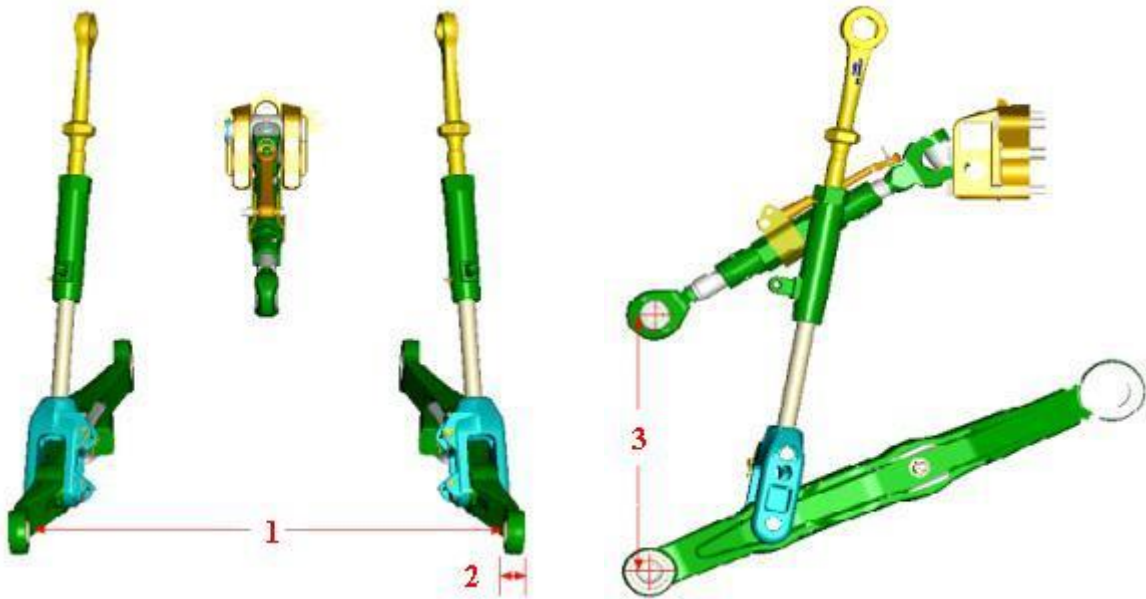


3-point hitch (1) (2)


3-point hitch (3)

	Category 2	Category 3N	Category 3	Category 4N	Category 4
Upper link pin diameter	25.4 mm (1.00 in.)	31.75 mm (1.25 in.)	31.75 mm (1.25 in.)	44.96 mm (1.77 in.)	44.96 mm (1.77 in.)
Upper link hole diameter	25.65 mm (1.01 in.)	32.00 mm (1.26 in.)	32.00 mm (1.26 in.)	45.21 mm (1.78 in.)	45.21 mm (1.78 in.)
Lower link pin diameter	27.94 mm (1.10 in.)	36.58 mm (1.44 in.)	36.58 mm (1.44 in.)	50.8 mm (2.00 in.)	50.8 mm (2.00 in.)
Lower link hole diameter	28.70 mm (1.13 in.)	37.34 mm (1.47 in.)	37.34 mm (1.47 in.)	51.05 mm (2.01 in.)	51.05 mm (2.01 in.)
Lower hitch point Span (1)	825 mm (32.48 in.)	825 mm (32.48 in.)	964.95 mm (37.99 in.)	920 mm (36.22 in.)	1166.62 mm (45.93 in.)
Width of ball (2)	44.96 mm (1.77 in.)	44.96 mm (1.77 in.)	44.96 mm (1.77 in.)	57.4 mm (2.26 in.)	57.4 mm (2.26 in.)
Pin centerline – Lower to upper (3)	610.11 mm (24.02 in.)	685.04 mm (26.97 in.)	685.04 mm (26.97 in.)	685.04 mm (26.97 in.)	685.04 mm (26.97 in.)

Quik-Coupler dimensions

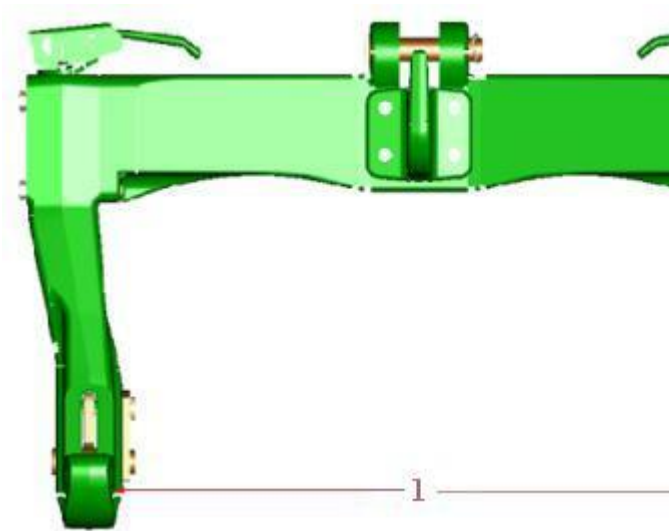

Quik-Coupler (1)

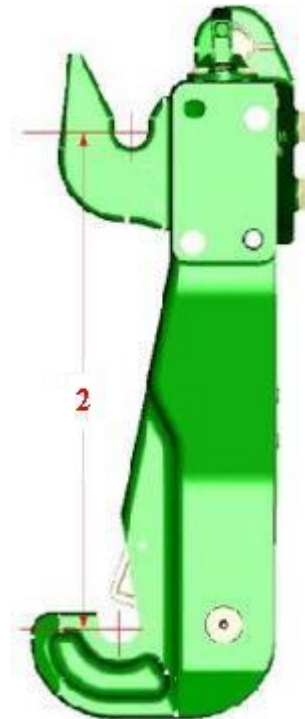

Quik-Coupler (2)

Quik-Couplers provide easy attaching and detaching of integral-mounted implements on row-crop and four-wheel drive tractors and require no modifications to fit tractor 3-point hitches.

	Lower hitch point span (1)	Pin centerline – lower to upper (2)
Category 2	828.55 mm minimum 834.14 mm maximum (32.62 in. minimum 32.84 in. maximum)	375.41 mm minimum 377.95 mm maximum (14.78 in. minimum 14.88 in. maximum)
Category 3N	828.55 mm minimum 834.14 mm maximum (32.62 in. minimum 32.84 in. maximum)	477 mm minimum 479.55 mm maximum (18.78 in. minimum 18.88 in. maximum)
Category 3	967.74 mm minimum 975.36 mm maximum (38.10 in. minimum 38.40 in. maximum)	477 mm minimum 479.55 mm maximum (18.78 in. minimum 18.88 in. maximum)
Category 4N	967.74 mm minimum 975.36 mm maximum (38.10 in. minimum	679.96 mm minimum 683 mm maximum (26.77 in. minimum

	38.40 in. maximum)	26.89 in. maximum)
Category 4	1170.94 mm minimum 1174 mm maximum (46.10 in. minimum 46.22 in. maximum)	679.96 mm minimum 683 mm maximum (26.77 in. minimum 26.89 in. maximum)

Optional Equipment On : Hitch category availability varies by tractor series

Last Updated : 25-Jul-2013

Product features are based on published information at the time of publication and are subject to change without notice. All

trademarked terms, including John Deere, the leaping deer symbol and the colors green and yellow used herein are the property

of Deere & Company, unless otherwise noted. Products, product features, and other content on this site may only be accurate

for products marketed and sold in North America.

Engine horsepower and torque information for non-Deere engines are provided by the engine manufacturer for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's Web site for additional information.

Copyright © 1994-2015 Deere & Company. All Rights Reserved.

[Source: John Deere](#)