


# AUGER REMOVAL INSTRUCTIONS

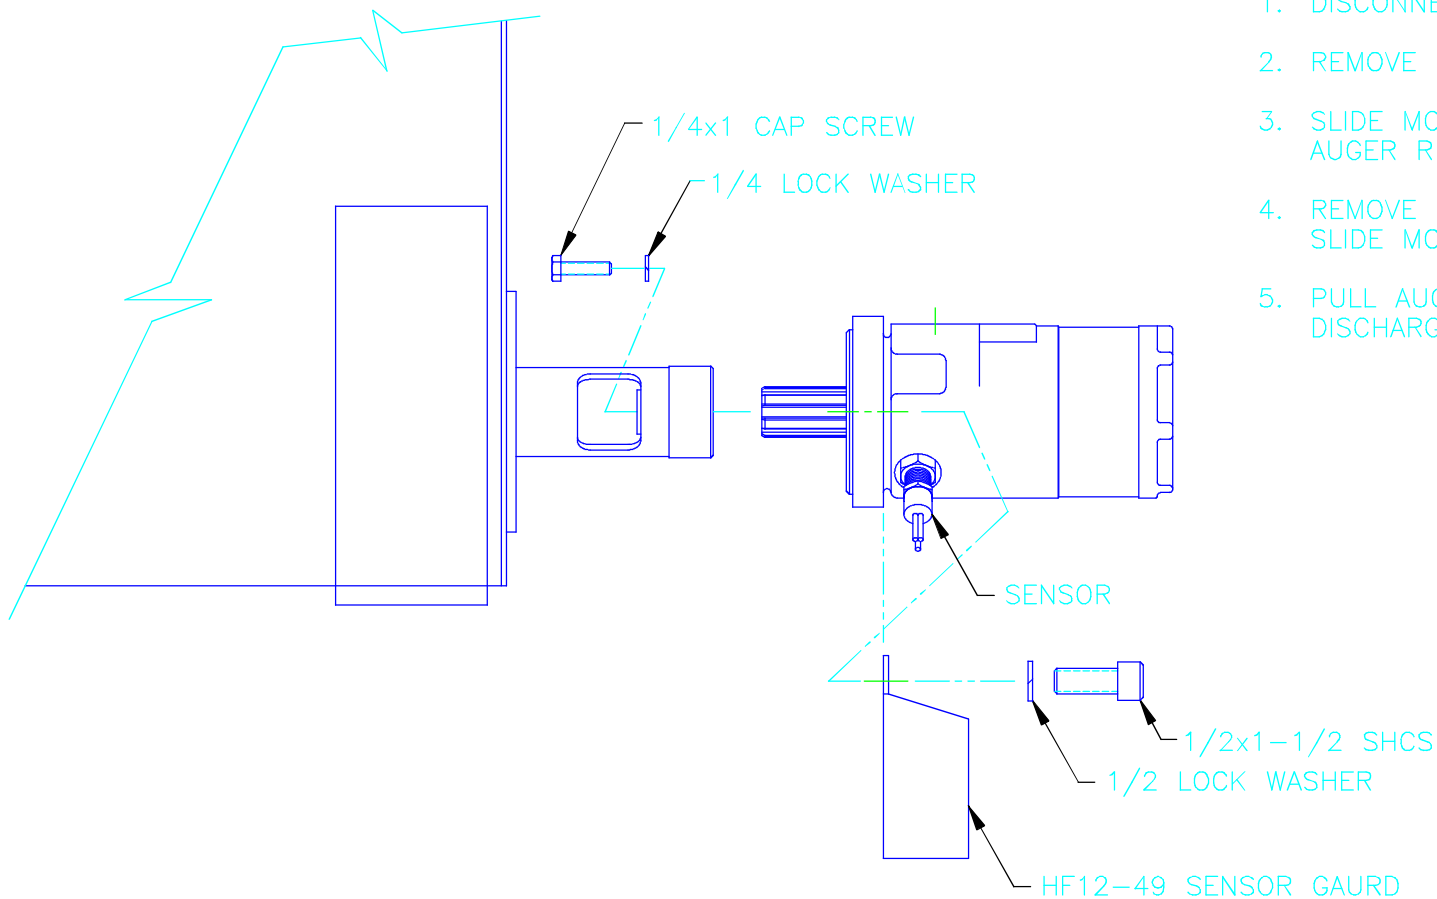

1. DISCONNECT SENSOR PLUG.
2. REMOVE 1/2" MOTOR MOUNT BOLTS.
3. SLIDE MOTOR AND AUGER OUT TO EXPOSE AUGER RETAINING SCREW.
4. REMOVE 1/4" AUGER RETAINING SCREW AND SLIDE MOTOR OFF OF AUGER.
5. PULL AUGER OUT OF HYDRA-FEEDER FROM DISCHARGE TUBE.

TRIPLE C, INC.		
P.O. BOX 248, SABETHA, KS 66534		
(785) 284-3674 FAX (785) 284-3931		
DWG PATH: \DWG\HF		
DO NOT SCALE DRAWING	SCALE: NTS	DRAWN BY: CEDRIC HEINIGER 08/31/95
TITLE: HYDRA-FEEDER AUGER REMOVAL INSTRUCTIONS		
DRAWING NUMBER: HF12-63		REV