



Specification Sheet Citadel™ Value Series

Type _____
Project _____
Date _____

Citadel™ Value Series 4 Ft. Vapor Tight Light

Description

The Citadel™ Value Series 4 Ft. Vapor Tight Linear LED Light is engineered for essential environmental protection without compromise. Built with impact-resistant UL 5VA polycarbonate housing and simplified latching system, this fixture delivers IP65-rated moisture and dust protection where budgets matter as much as performance. The open-bottom design provides tool-free lamp access and UVC retrofit capability, making it the practical choice for warehouses, light manufacturing, retail spaces, and commercial facilities that need dependable vapor tight lighting at an entry-level price point.



Polycarbonate Housing



Part Number Breakdown Example

BASE							OPTIONS							
CTVS	4SFA	5L40	90	H	DTO	SS	MBB	2T50	E10	C10	OS			
Family	Length	Lens Options	Lumens	CCT	CRI	Voltage	Dimming	Latches	Mounting	Hub Location	Emergency	Cord	Control	
CTVS: Citadel Value Series	4: 4 ft	SCA: Smooth Clear Acrylic SFA: Smooth Frosted Acrylic RFA: Ribbed Frosted Acrylic SCP: Smooth Clear PC SFP: Smooth Frosted PC	4L: 4,000 lm 5L: 5,000 lm 8L: 8,000 lm XL: xx,000 lm*	30K: 3000K 40K: 4000K 50K: 5000K	Blank: 80 CRI 90: 90 CRI	Blank: Universal (120-277 VAC) H: High (347-480 VAC)	Blank: 0-10V DTO: Dim to OFF	W: White SS: Stainless Steel	MB: SS Brackets MBB: SS Brackets with Bail SPM: Single Pendant ¾" DPM: Dual Pendant ½"	2T50: 2 Top ½" E50: 1 End ½" 2E50: 2 Ends ½" C75: Center ¾"	E10: 10 W Emergency	C10: 10 ft Cord C10P: 10 ft Cord with Plug	OS: PIR Occupancy Sensor	

*Note: SLP offers extended lumen packages, ask our customer service for more info

Benefits and Features

- Impact-resistant UL 5VA polycarbonate durable housing
- IP65-rated protection against moisture and dust intrusion
- Simplified clip latching system reduces manufacturing cost
- Open-bottom design for tool-free lamp access
- UVC retrofit-ready configuration for germicidal applications
- Economical mounting brackets keep installed costs down
- Universal boardtray platform simplifies inventory management
- Narrow 4 ft profile fits standard commercial spaces
- Made in USA with BAA/BABA compliance for federal projects
- Entry-level pricing without sacrificing essential vapor tight protection

Electrical

- Universal voltage operation (120-277 VAC) standard.
- High voltage option available (347-480 VAC).
- Standard 0-10V dimming for lighting control integration.
- Dim-to-off capability for maximum energy savings.
- Multi-CCT switchable options (3000K/4000K/5000K).

Applications

- Warehouses and distribution centers
- Light manufacturing and assembly facilities
- Retail back-of-house and storage areas
- Commercial building maintenance spaces
- School corridors and institutional facilities
- Parking garages and covered structures
- Loading docks and receiving areas
- General-purpose indoor/outdoor commercial spaces

Certifications

- UL 1598 listed for wet location applications
- IP65 ingress protection rating
- RoHS compliant for environmental safety
- DLC QPL qualified for energy rebate programs



1400 S Old Highway 141
Fenton, MO 63026
www.splighting.com
636.660.4084

Contact customer support for all product options.
Note: Product specifications and details subject to change without notification.




Made in USA · BAA & BABA Compliant · Version 1.5 07/01/26




Specification Sheet Citadel™ Value Series

Type _____
Project _____
Date _____

Dimensional Diagram

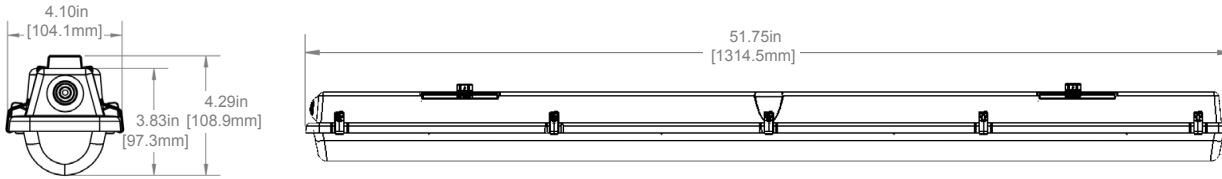

Component Assembly View (4 Ft. Fixture Example)

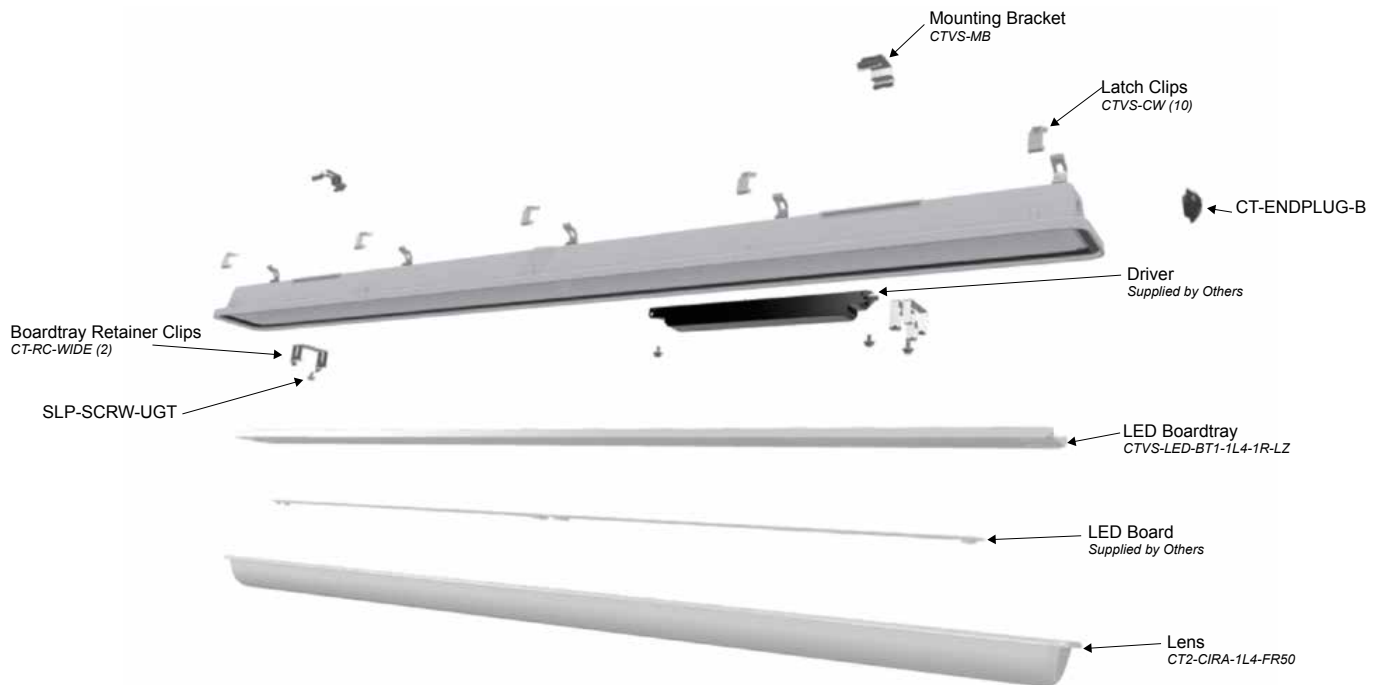

1400 S Old Highway 141
Fenton, MO 63026
www.splighting.com
636.660.4084

Contact customer support for all product options.
Note: Product specifications and details subject to change without notification.



Made in USA · BAA & BABA Compliant · Version 1.5 07/01/26