


Citadel 4i

Ordering Guide

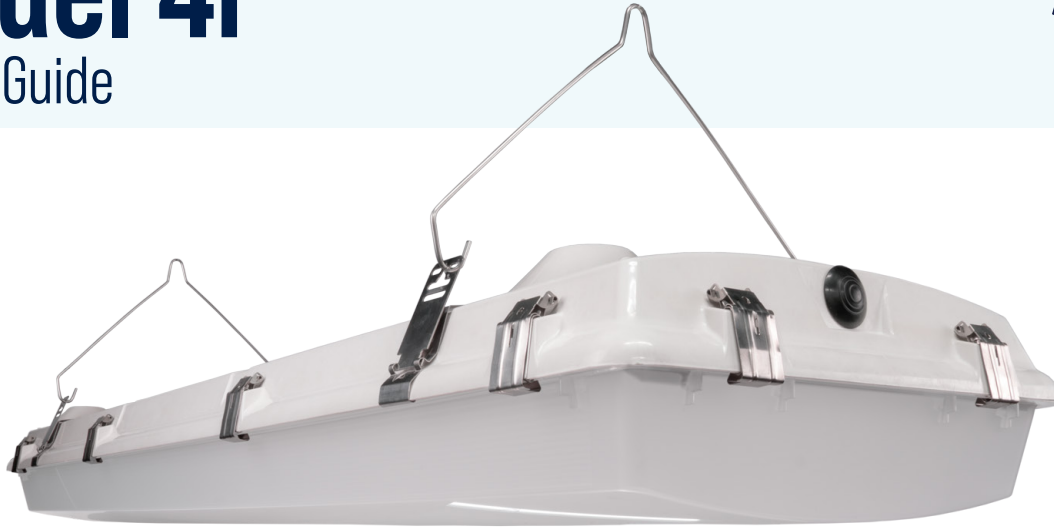


Description

The Citadel 4i™ Wide Gasketed LED Enclosure is built for largescale industrial and commercial environments where high output and extreme durability are essential. Its wide-body fiberglass housing accommodates up to 40,000 lumens, making it ideal for high-ceiling spaces that demand serious light output. Featuring a poured-in-place gasket, 316 stainless steel hardware, and IP65/IP66/IP67 plus NEMA 4X ratings, the CT4i handles moisture, dust, chemicals, and high-pressure washdowns without compromise. NSF-certified and designed to minimize debris retention during cleaning, it's a workhorse for food processing, industrial facilities, and anywhere durability meets high-bay lighting needs.




Features

- Same 4ft. Size, the Citadel 4i stands for Industrial
- More access points for NPT pipes
- UL 5VA chemical resistant fiberglass housing will not melt or burn
- Captive latches will not fall off during maintenance
- Acrylic or PC Lenses are both available in clear or frosted ribbed variations
- Polyurethane or silicone gasket for a watertight seal
- Made in USA with BAA/BABA compliance



Citadel 4i

Ordering Guide

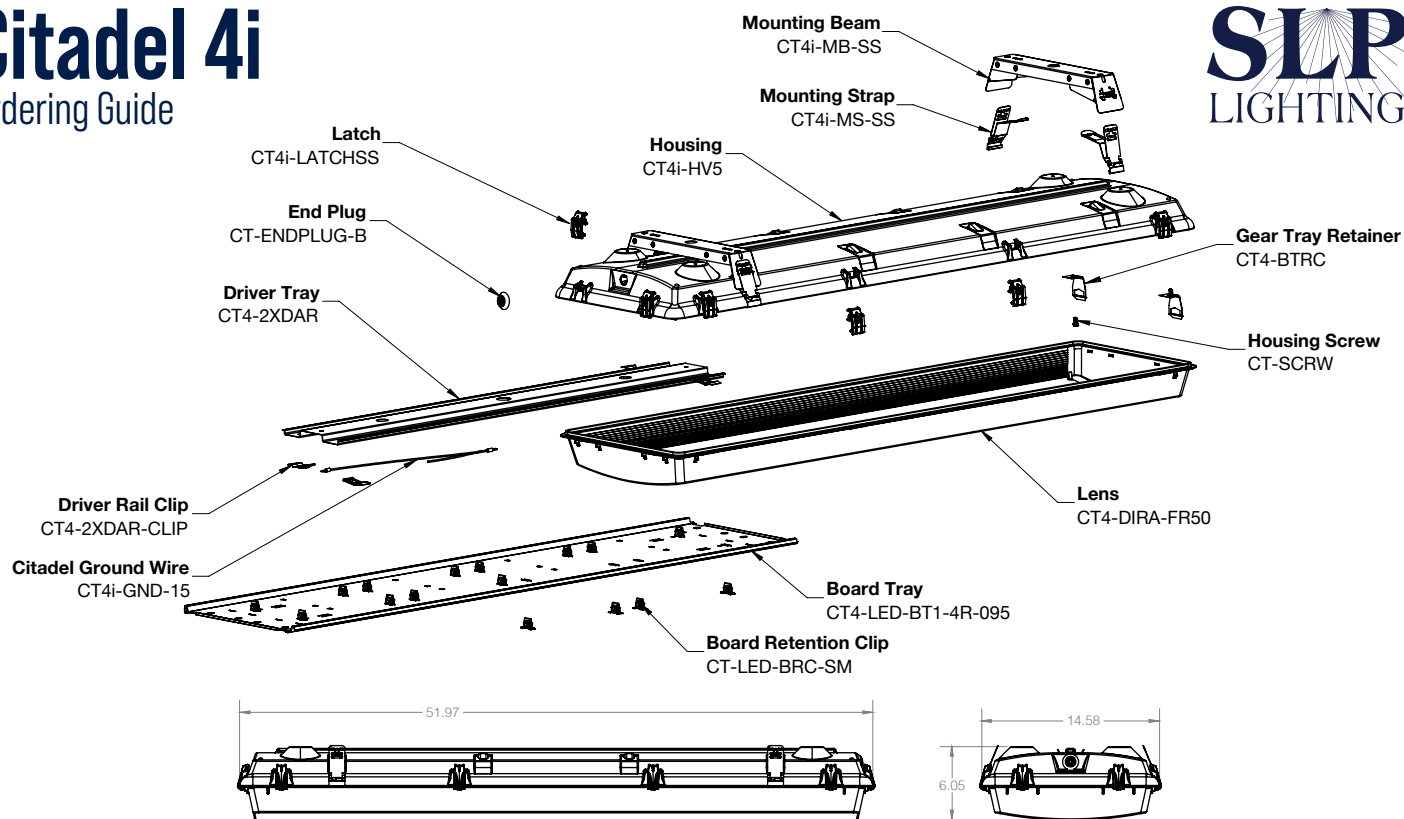

Housing and Hardware

Description	Part #	Quantity Per Unit
Housing	CT4-HV5	1
Housing Screw	CT-SCRW	4

Lens

Frosted Acrylic	CT4-DIRA-FR50	1
-----------------	---------------	---

Driver Tray and Hardware

Driver Tray	CT4-2XDAR	1
Driver Tray Clip	CT-2XDAR-CLIP	6
Citadel Ground Wire	CT4i-GND-15	1

Board Tray and Hardware

Board Tray	CT4-LED-BT1-4R-095	1
Board Retention Clip	CT-LED-BRC-SM	16
Board Tray Retainer Clip	CT4-GTRC	4

Latches/Clips

Stainless Steel Latch	CT4-LATCHSS	12
-----------------------	-------------	----

Mounting

Mounting Strap (Required)	CT4i-MS-SS	4
Mounting Beam	CT4i-MB-SS	2

End Plugs

End Plug	CT-ENDPLUG-B	2
----------	--------------	---

Housing

Design	Material	Part #	PCS/CTN	Skid Quantity
Standard Housing with Holes at Both Ends	5VA (f1) Fiberglass (UL)	CT4I-HV5	10	90
Heat Management Housing	5VA (f1) Fiberglass (UL)	CT4I-HV5-BR	10	90

Board Trays

Design	Finish	Part #	PCS/CTN	Skid Quantity
4 Rows 0.95" Board	White Enamel	CT4-LED-BT1-4R-095	Bulk	200
4 Rows 1.60" Board	White Enamel	CT4-LED-BT1-4R-160	Bulk	200
2 Rows 0.80" Board	White Enamel	CT4-LED-BT1-2R-080	Bulk	200
4 Rows 0.80" Board	White Enamel	CT4-LED-BT1-4R-080	Bulk	200

Mounting

Component	Material	Part #	PCS/BAG	PCS/CTN
Ceiling Mount	316 Stainless	CT4-CM1.25	20	400
V-Hook	316 Stainless	CT4-VHOOK	20	5,000
Rigid Mounting Beam		CT4I-MB-SS	20	20
Zinc Plated Rigid Mounting Beam		CT4I-MB-ZP	20	20
Driver Attachment Rail for Pendant Mount Support		CT4-2XDAR		
Driver Attachment Rail Clips	White Enamel	CT-2XDAR-CLIP		
Stainless Steel Mounting Strap	316 Stainless	CT4I-MS-SS	40	480
Zinc Plated Mounting Strap		CT4I-MS-ZP	40	480

Hardware

Component	Part #	PCS/BAG	PCS/CTN
Board Tray Retainer Clip	CT4-GTRC	40	1,200
Board Screw	CT-SCRW	100	10,000
Driver Tray Screw	CT-SCRW-UGT	100	10,000
1/2" Hub	CT-DCB-50	200	
3/4" Hub	CT-DCB-75	100	
12" Gear Tray Tether (2 / Fixture)	CT-LT12	20	2,000
8" Lens Tethers (2 / Fixture)	CT-LT8	20	3,000
End Plugs	CT-ENDPLUG-B	200	2,000
Wire Grommet	SLP-GRMT-0500	200	
Citadel Ground Wire	CT4I-GND-15	100	6,000
Ballast Attachment Bolt	CT4I-BAB	200	6,000
Ballast Attachment Flanged Nut	CT4I-BAFN	200	6,000
Driver Tray "U" Shape for Two Drivers	CT-LED-DT-U		
Board Retention Clip	CT-LED-BRC-SM	200	5,000

Product offering and specifications subject to change without notice.

Diffusers

Design	Material	Part #	PCS/BAG	PCS/CTN
Water Clear with Frosted Ends	Clear Polycarbonate	CT4-DP	10	90
	Clear Impact Resistant Acrylic	CT4-DIRA	10	90
FR50 Frosted	Frosted Polycarbonate	CT4-DP-FR50	10	90
	Frosted Impact Resistant Acrylic	CT4-DIRA-FR50	10	90

Latches

Component	Part #	PCS/BAG	PCS/CTN
Stainless Steel Lens Clip	CT4I-LATCHSS	120 / Bag	1,800
Secure Locking Plastic Latch	CT4I-LATCHW	120 / Bag	1,200

Product offering and specifications subject to change without notice.