
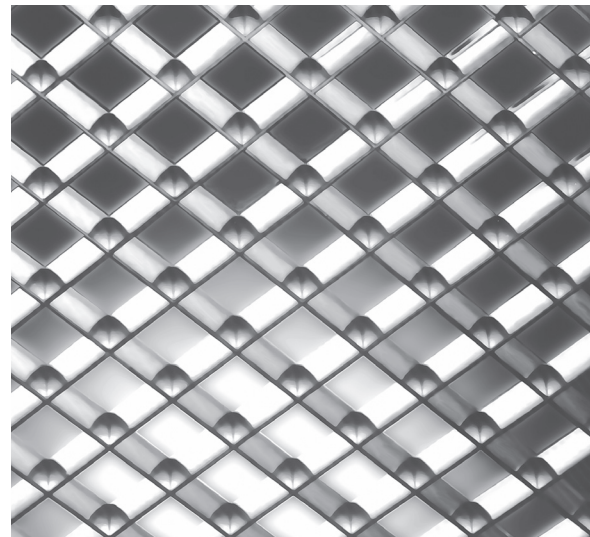



# Parasquare 3

## Enhanced Efficiency Low Glare Louver

P3® with mid-sized  $\frac{3}{4}$ " x  $\frac{3}{4}$ " x  $\frac{1}{2}$ " (19 x 19 x 12.2 mm) cells provide 35° shielding and maintains energy saving efficiencies. P3® reflects SLP's commitment to high efficiency louvers by offering not only an unsurpassed optically engineered wedge back design but also the molded louver configurations that will maximize energy budgeted applications. For the world market, P3® is also offered in an unflanged metric panel size.

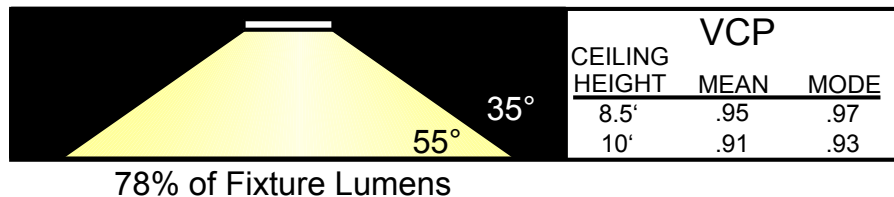

## Ceiling Style

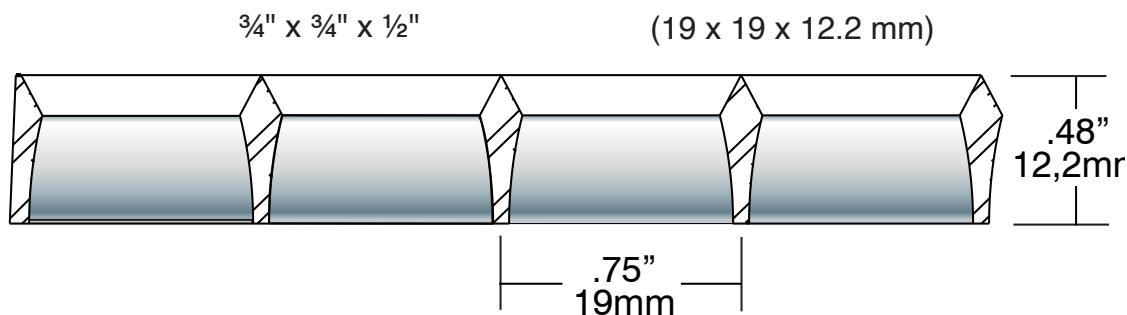

## Ordering Guide

Style	2 x 4 23 $\frac{1}{16}$ " x 47 $\frac{1}{16}$ " 603 x 1213 mm 10 PCS/CTN, 41 lbs/19 kg
Specular Silver	P3-24-1

Product offering and specifications subject to change without notice