
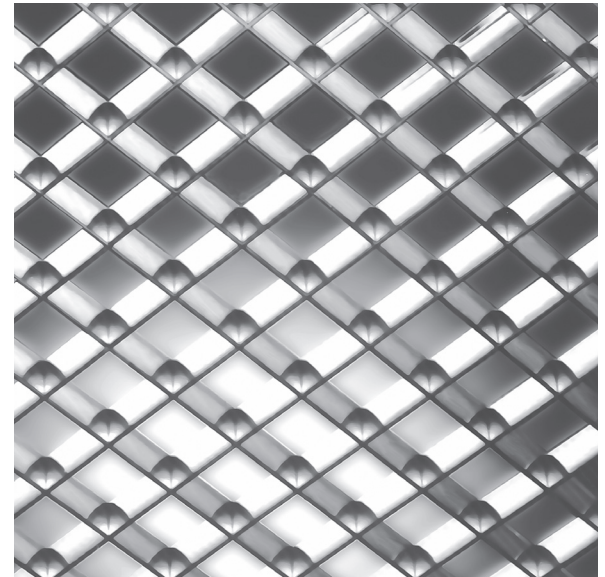


## High Efficiency Controlled Glare Louver

P5® is the low brightness louvers of choice when energy budgeting is critical and controlled luminance is required. The  $\frac{3}{4}" \times \frac{3}{4}" \times \frac{3}{8}"$  (19 x 19 x 9mm) flat back louver design affords efficiencies equal to those of lenses while maintaining 99% of its distribution in the 0 to 60° zone.

*\*This product is made to order with a minimum quantity order of 500 pieces.*

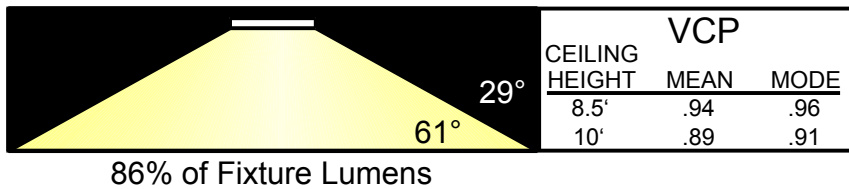

## Ceiling Style


$\frac{3}{4}" \times \frac{3}{4}" \times \frac{3}{8}"$

(19 x 19 x 9mm)

Metric Louver Size:

595 x 1195mm

620 x 1245mm

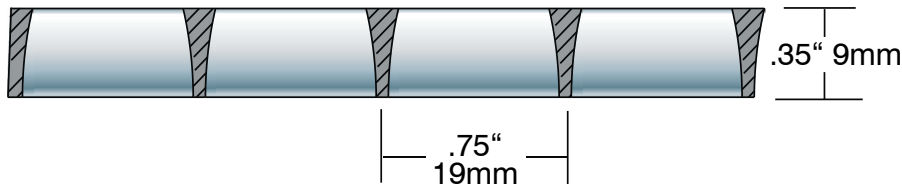

## Ordering Guide

Style	<b>2 x 4</b> 23 $\frac{1}{16}"$ x 47 $\frac{1}{16}"$ 603 x 1213mm 15 PCS/CTN, 41 lbs/19 kg
Specular Silver	P5-24-1

Product offering and specifications subject to change without notice