

FIRE SHIELD



Barri-Ring Oval




System No. W-L-7325

Barri-Ring Oval: Simplified Shower Valve Protection in Fire Rated Assemblies

Barri-Ring Oval is a complimentary product of the Barri-Ring with all of the same great features. The oval design is meant to capture valves in which the water stops come out of the valve at a 45-degree angle, and to fit a wider range of plumbing valves.

ANSI/UL1479 (ASTM E814)	CAN/ULC S115
F Ratings — 1 and 2 Hr (See Items 1 and 3)	F Ratings — 1 and 2 Hr (See Items 1and 3)
T Ratings — 1 and 2 Hr (See Items 1 and 3)	FT Ratings — 1 and 2 Hr (See Items 1 and 3)
	FH Ratings — 1 and 2 Hr (See Items 1 and 3)
	FTH Ratings — 1 and 2 Hr (See Items 1 and 3)

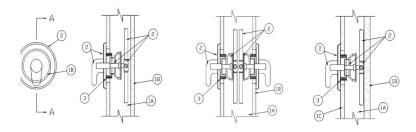

- UL Tested and Listed: Compliant with W-L-7325 for shower valve penetrations, meeting code-required equal "T" rating.
- Versatile Compatibility: Works with both non-metallic and metallic escutcheon plates, and fits metal and wood stud
- framing.
 - Robust Construction: Minimum 2½ inch
- shaft
- wall included, tested in back-to-back configurations.
- Quality Material: Made of durable stainless steel, ensuring long-lasting performance.
- Convenient Access: Center opening allows easy access to line shut-off screws.
- Easy Installation: Fits into an oval hole in gypsum with NO CAULKING REQUIRED!
 Specifications Available: Find detailed
- specs on Deltek SpecPoint/MasterSpec,
 RIB SpecLink, and ARCAT.

Patent Pending: Proudly made in the United States of America.

(702-622-9385

www.FireShieldLV.com

Info@FireShieldLv.com