


TECHNICAL DATA SHEET

DOC NUMBER:	REVISION:	ISSUE:	DATE:
EMF-UIIBR-001	00	00	23 JUNE 2023

EMPIRE
METAL FABRICATORS
EMFab

EMFAB MAIN CLAMPLOK ANCHOR

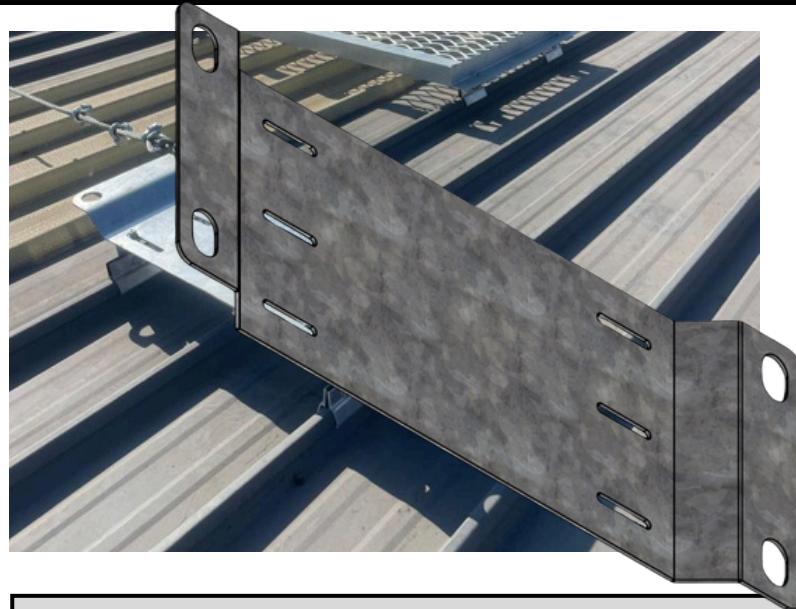

ANCHOR DESCRIPTION:

Our EMFab Main Clamplok anchor is made from strong and durable 4mm thick mild steel. It features a universal attachment, making it compatible with various roofing systems. The anchor is powder coated in black, providing a sleek and high-quality finish. With its unique and different design, this anchor helps to keep costs down without compromising on performance. The anchor is securely attached to the Clamplok plate using two M12x30 hex set and two M12 spring washers. It is specifically designed for use with Kliplok roofs and comes with six Kliplok clamps to ensure a secure attachment to the Kliplok roof profile. With a weight of 6,75 kg, this anchor is designed with convenience in mind and comes with an easy-to-carry handle. Installation is made easy and hassle-free.

WHY CHOOSE EMFAB'S ROOF ANCHORS:

With over 30 years of roofing experience amongst EMFab's Top Management, our roof anchor systems are specifically designed for different roof types with our top priority being to provide fall protection for workers who perform tasks at height. They are engineered with precision to ensure maximum safety, and our expert team can install them quickly and efficiently. All our anchors are designed and tested to carry over 15kN weight. Our fall protection equipment complies with OHSA regulations and is designed to keep workers safe while on the job.

ANCHOR SIZE:

Length : 315mm
Height : 150mm
Width : 260mm

MATERIAL:

Mild Steel

MAXIMUM PERMISSIBLE RATE OF DESCENT:

Maximum of 2 Person

MAXIMUM DESCENT DISTANCE:

6 Meters

TEST COMPLIANCE:

Pull Tester - 15KN for 3 minutes