



**Solis: The World's 3rd Largest
PV Inverter Manufacturer**

Developing technology to
power the world with clean energy


**COMPANY
MISSION**



COMPANY PROFILE

Established in 2005, Ginlong (Solis) (Stock Code: 300763.SZ) stands as the world's third-largest PV inverter manufacturer. As a global provider of solar and energy storage solutions catering to residential, commercial, and utility-scale customers, we deliver value across the solar supply chain. Operating under the Solis brand, our solar inverter product line employs innovative string technology, ensuring top-tier reliability validated through rigorous international certifications.

By amalgamating a global supply chain with world-class R&D and manufacturing capabilities, Ginlong tailors Solis inverters to each regional market, with dedicated teams of local experts providing exceptional service and support. Our proven bankability has garnered support from leading financial institutions, assuring robust, long-term returns on investment. Collaborating with stakeholders, we are committed to expediting the world's journey towards a more sustainable future.

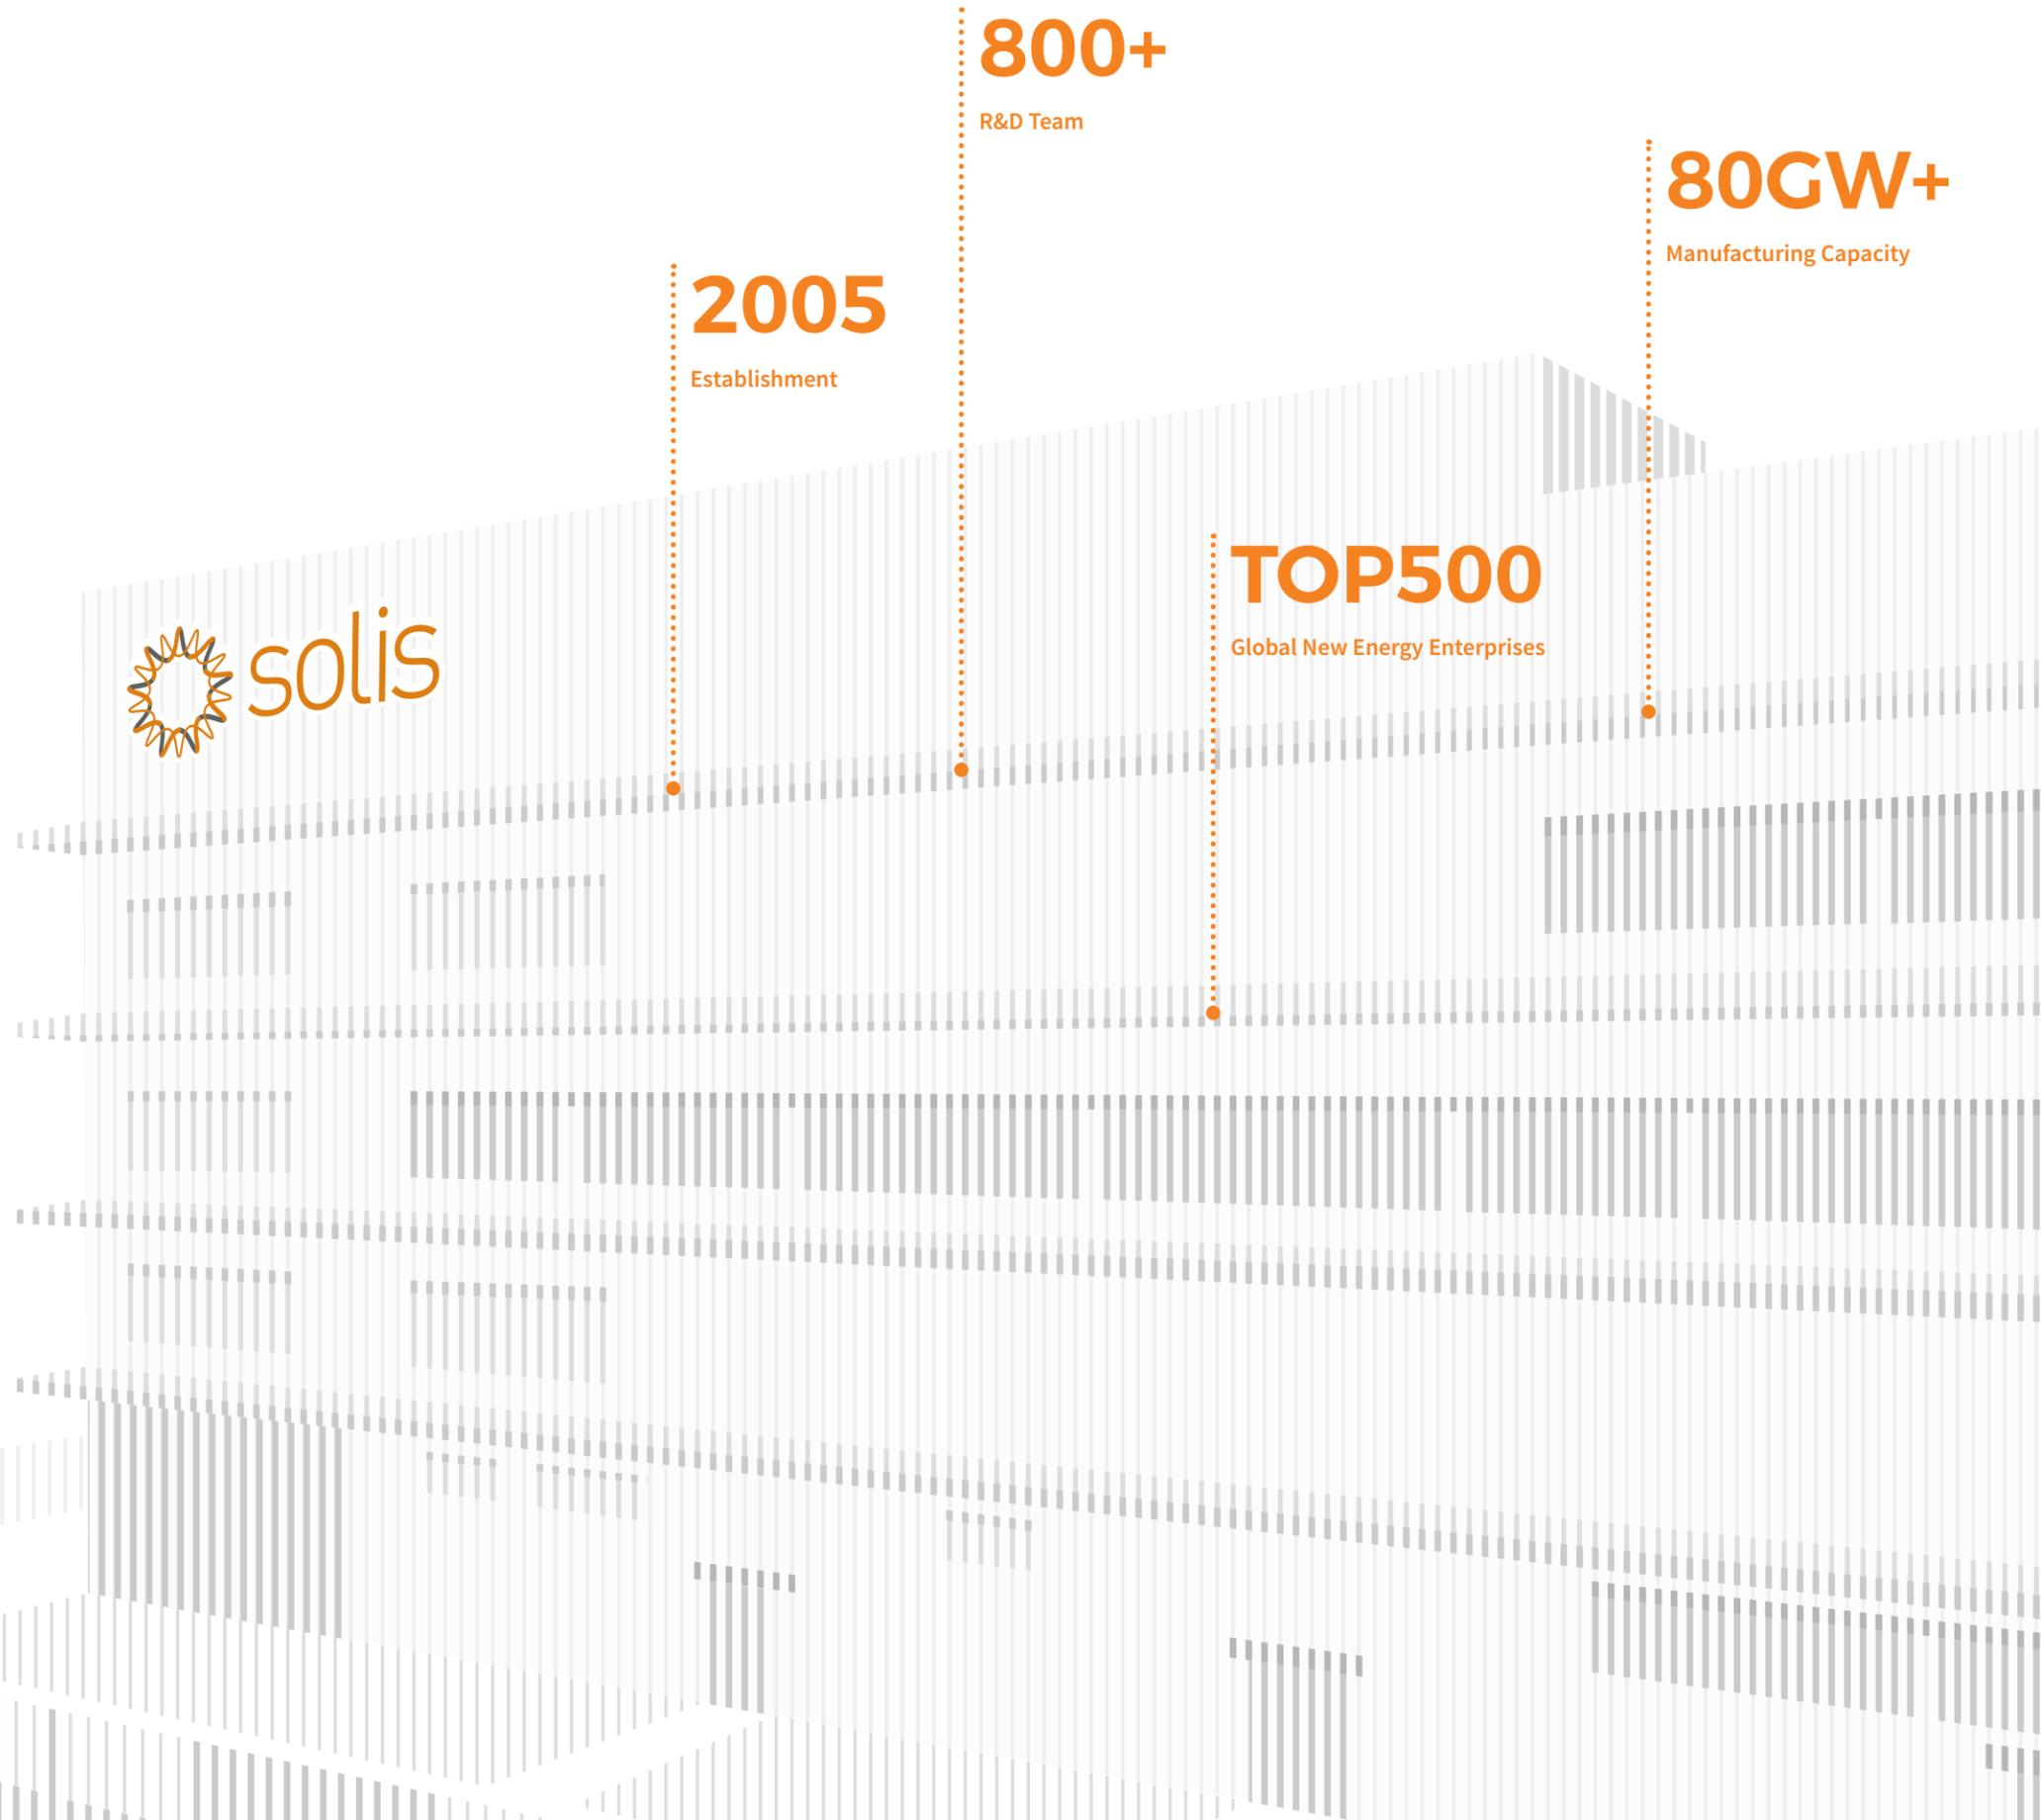

COMPANY HISTORY

2005

Ginlong Technologies established in Ningbo, China

2006

One of the first inverters certified to UK G83

2009

First Asian string inverter to achieve USA UL1741 certification

2010

Second Asian inverter certified to AS4777/AS 3100

2011

Ginlong hosted IEC61400 second annual meeting

2015

Ginlong inverter installed on the Eiffel Tower in Paris

Achieved top 12 inverter sales ranking in Europe

Earned third place ranking in China PV string inverter brand value (2015-2016)

2016

Listed by Asia PV innovation

Awarded Best Distribution Inverter Brand by PVBL

2017

Granted prestigious APVIA Technology Achievement Award (2017-2021)

2018

Single-phase string inverters ranked 2nd in global market shares (Wood Mackenzie)

2019

Ginlong (Solis) listed as a Public Company Stock Code: 300763.SZ

Ginlong (Solis) Ranked Third among Asian Brands by BloombergNEF Bankability

2020

Three-phase string inverters ranked 3rd in global market shares (Wood Mackenzie)

Ginlong Solis won PVBL 2019 Annual Top Global PV Brand Award

2021

National Enterprise Technology Center

Ranked among the top 500 global new energy companies

National technological innovation demonstration enterprise

Excellent after-sales service system certification

Sixth batch of individual champions in 2021 by (MIIT)

2022

The World's 3rd Largest PV Inverter Manufacturer (2021-2022)

No.2 PV Inverter Supplier Among Listed Companies in Shipments in China

National laboratory qualification CNAS certification

2023

Ranks among the top PV brands by EUPD research for 8 consecutive years (2016-2023)

Forbes China's Top 50 Innovative Enterprises





28 Service Centers

With 28 offices and service centers around the world, including the Australia, Brazil, China, Chile, France, Germany, India, Italy, Indonesia, Korea, Mexico, Myanmar, Malaysia, Netherlands, Philippines, Poland, Pakistan, Romania, South Africa, Spain, Sweden, Singapore, Turkey, Thailand, UK, Ireland, USA and Vietnam, Solis has a well-established and expanding global presence.

HQ

Service Centers



GLOBAL REACH LOCAL EXPERTISE

CONTENTS

P11

Residential Energy Storage Solutions

The Solis residential energy storage family, covers single-phase and three-phase application scenarios. It aims to provide energy storage solutions for PV systems to achieve the goal of residential zero-carbon green electricity. The power range covers 3kW - 10kW.

P45

Commercial Energy Storage Solutions

Solis commercial storage product S6-EH3P(30-50)K-H, is a highly integrated three-phase energy storage inverter, it has multiple functions, high safety level, strong energy supply reliability, which is a powerful tool for commercial PV energy storage projects.

P31

Residential Solar PV Solutions

Solis residential string inverters are cost-effective and efficient residential green power leaders, providing smarter green power solutions for your residential buildings.

P49

Commercial & Industrial Solar PV Solutions

Solis' C&I string inverter product line is broad with a power range cover 25kW - 110kW, providing you with the best industry green power solutions.

P67

Utility Scale Solar PV Solutions

Solis has optimized and innovated the whole process of utility solar PV solutions, integrated PV system design, digital management, and IoT technology.

P79

SolisCloud: Intelligent Solar Energy System Monitoring

The SolisCloud intelligent monitoring system includes hardware and software products and is a comprehensive energy management solution. Hardware products, including data stick, data box, EPM and PLC, etc; transmit to SolisCloud online energy

P75

Export Power Management Solutions

In some countries, local regulations limit the amount of PV power that can be exported to the grid or allow no export. Solis offers two export limitation solutions for single and multiple inverters system.

management platform. Real-time monitoring, visualized management and remote O & M of residential, C&I and utility scale solar PV plants.

Residential Energy Storage Solutions



The Solis residential energy storage family has abundant products, covering single-phase and three-phase application scenarios. It aims to provide energy storage solutions for PV systems to achieve the goal of real residential zero-carbon green electricity. The power range covers 3kW - 10kW. We can according to the requirements of your project application scenarios, rely on our flexible products to provide you with the best residential zero-carbon green power solutions.


Models:

- S5-EH1P(3-6)K-L
- S6-EH1P(3-6)K-L-EU
- RHI-3P(5-10)K-HVES-5G
- S6-EH3P(5-10)K2-H
- S6-EH3P(5-10)K-H-EU
- S5-EA1P3K-L
- S6-EA1P(3.6-6)K-L
- S6-EO1P(4-5)K-48


Output:

3 kW - 10 kW

Residential Energy Storage Solution - S6 series

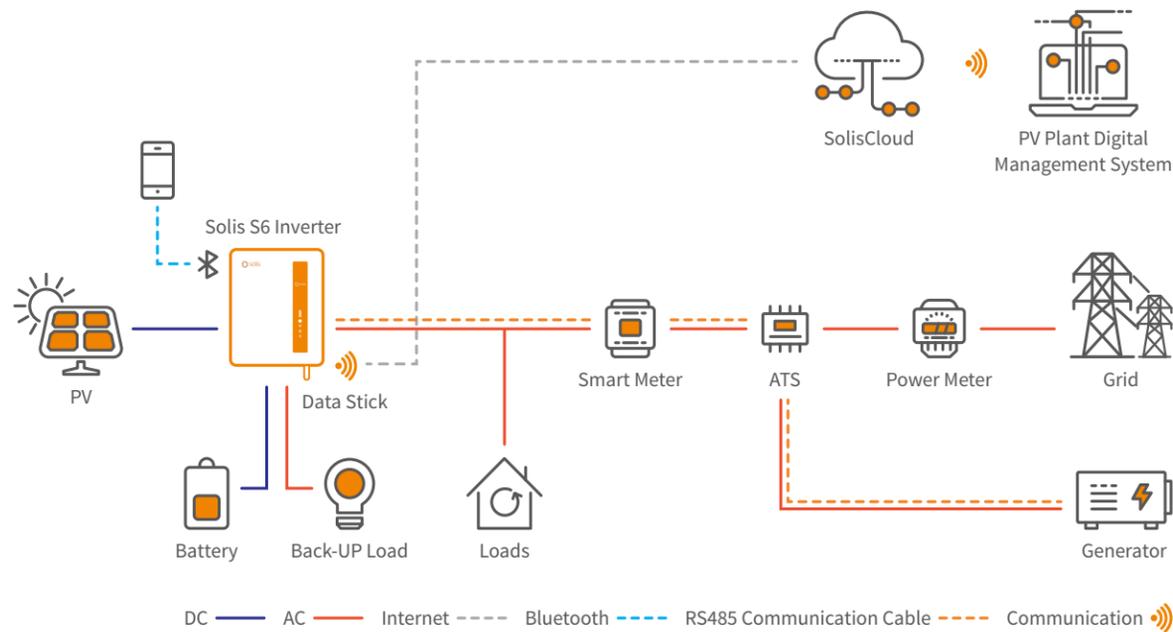

Residential Energy Storage Solution - AC-coupled

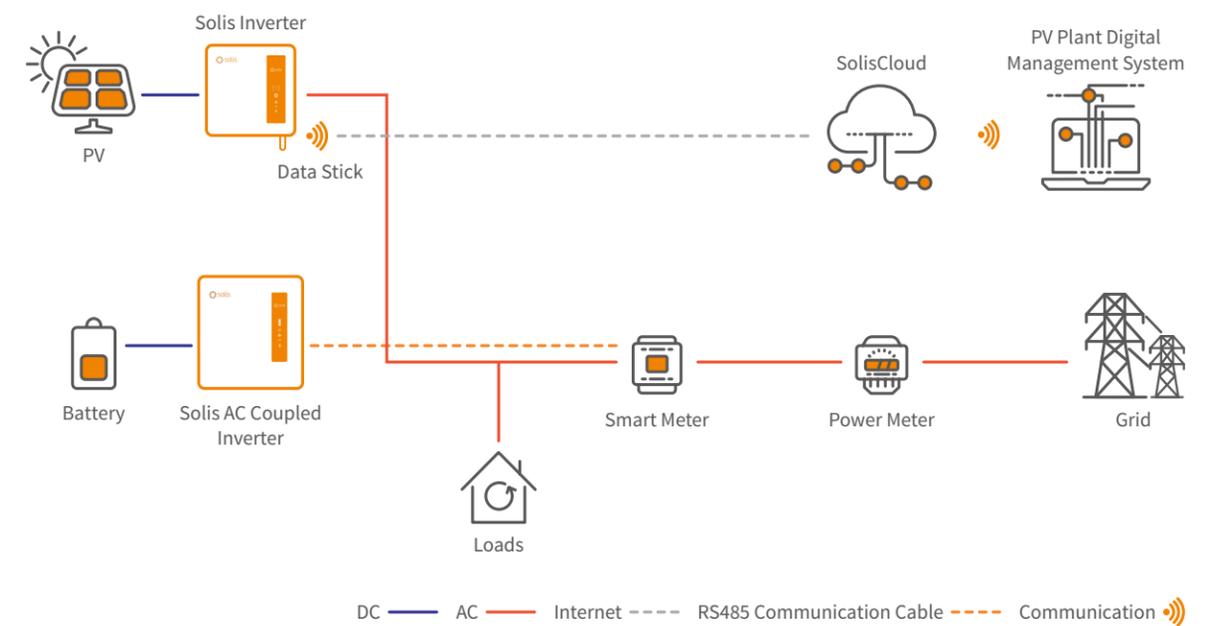

S5-EH1P(3-6)K-L

Solis Single Phase Low Voltage Energy Storage Inverters

Features:

- Max. string input current 15A
- Uninterrupted power supply, 20ms reaction
- 5kW backup power to support more important loads
- Multiple working modes to make maximize self-consumption, increase benefit
- Higher charge-discharge efficiency, improving the economic benefits
- AFCI protection, proactively reduces fire risk
- Fanless design, long lifespan
- Compatible with lithium & lead-acid batteries, increased more choice in different markets
- Intelligent EMS function, improving battery's reliability
- 24-hour fully intelligent energy management, Real-time grasp of PV plant status
- Remotely control & upgrade function, making digital power plant maintenance at your fingertips

Models:

S5-EH1P3K-L / S5-EH1P3.6K-L

S5-EH1P4.6K-L / S5-EH1P5K-L

S5-EH1P6K-L



360° View

DATASHEET

S5-EH1P(3-6)K-L

Models	3K	3.6K	4.6K	5K	6K
Input DC (PV side)					
Recommended max. PV power	4.8 kW	5.7 kW	8 kW	8 kW	8 kW
Max. input voltage	600 V				
Rated voltage	330 V				
Start-up voltage	120 V				
MPPT voltage range	90-520 V				
Max. input current	15 A / 15 A				
Max. short circuit current	22.5 A / 22.5 A				
MPPT number/Max. input strings number	2/2				
Battery					
Battery type	Li-ion / Lead-acid				
Battery voltage range	42 - 58 V				
Battery capacity	50 - 2000 Ah				
Max. charge / discharge power	3 kW		5 kW		
Max. charge / discharge current	62.5 A		100 A		
Communication	CAN				
Output AC (Back-up)					
Rated output power	3 kW		5 kW		
Max. apparent output power	4.5 kVA, 10 sec		7 kVA, 10 sec		
Back-up switch time	<20 ms				
Rated output voltage	1/N/PE, 220 V / 230 V				
Rated frequency	50 Hz / 60 Hz				
Rated output current	14 A / 13.5 A		23 A / 22 A		
THDv (@linear load)	<2%				
Input AC (Grid side)					
Input voltage range	187-265 V				
Max. input current	20.5 A / 20 A	25 A / 23.5 A	31.5 A / 30 A	34.5 A / 33 A	34.5 A / 33 A
Frequency range	45-55 Hz / 55-65 Hz				
Output AC (Grid side)					
Rated output power	3 kW	3.6 kW	4.6 kW	5 kW	6 kW
Max. apparent output power	3.3 kVA	4 kVA	4.6 kVA	5.5 kVA	6.6 kVA
Operation phase	1/N/PE				
Rated grid voltage	220 V / 230 V				
Rated grid frequency	50 Hz / 60 Hz				
Rated grid output current	13.7 A / 13.1 A	16.4 A / 15.7 A	20.9 A / 20 A	22.8 A / 21.7 A	27.3 A / 26.1 A
Max. output current	15 A	18.5 A	21 A	25 A	30 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)				
THDi	<2%				
Efficiency					
Max. efficiency	>97.1%				
EU efficiency	>96.5%				
Protection					
DC reverse-polarity protection	Yes				
Short circuit protection	Yes				
Output over current protection	Yes				
Surge protection	DC Type II / AC Type II				
Ground fault monitoring	Yes				
Integrated AFCI (DC arc-fault circuit protection)	Yes ⁽¹⁾				
Protection class/Over voltage category	I/II				
General Data					
Dimensions (W*H*D)	333*505*249 mm				
Weight	17.9kg		18.1 kg		
Topology	High frequency isolation (for battery)				
Operating ambient temperature range	-25 ~ +60°C				
Ingress protection	IP65				
Cooling concept	Natural convection				
Max. operation altitude	3000 m				
Grid connection standard	G98 or G99, VDE-AR-N 4105/VDE V 0124, EN 50549-1, VDE 0126/UTE C 15/VFR:2019, RD 1699/RD 244/UNE 206006/UNE 206007-1, CEI 0-21, C10/11, NRS 097-2-1, EIFS 2018.2, IEC 62116, IEC 61727, IEC 60068, IEC 61683, EN 50530, MEA, PEA				
Safety/EMC standard	IEC/EN 62109-1/-2, EN 61000-6-2/-3				
Features					
DC connection	MC4 connector				
AC connection	Quick connection plug				
Display	7.0"LCD color screen display				
Communication	RS485, Optional: Wi-Fi, GPRS				

(1) Activation required.

S6-EH1P(3-6)K-L-EU

Solis Single Phase Low Voltage Energy Storage Inverters

Features:

- Integrated 2 MPPTs for multiple array orientations
- Industry leading 125A/6kW max charge/discharge rating
- Automatic UPS switching
- Supports Peak Shaving Mode
- Pre-made Battery, Meter and CAN cabling to reduce installation time
- Supports 1ph and 3ph flexible connection on both the Grid and Backup Port
- Compatible with multiple brands of lithium battery models
- Increased battery protection and operation features to extend battery life

Models:

S6-EH1P3K-L-EU / S6-EH1P3.6K-L-EU

S6-EH1P4.6K-L-EU / S6-EH1P5K-L-EU

S6-EH1P6K-L-EU



360° View

• Monitoring Portal – www.soliscloud.com or SolisCloud App • Compatible Batteries – Check online at www.solisinverters.com

DATASHEET

S6-EH1P(3-6)K-L-EU

Models	3K	3.6K	4.6K	5K	6K
Input DC (PV side)					
Recommended max. PV power	4.8 kW	5.7 kW	7 kW	8 kW	9.6 kW
Max. input voltage	600 V				
Rated voltage	330 V				
Start-up voltage	90 V				
MPPT voltage range	90-520 V				
Max. input current	16 A / 16 A				
Max. short circuit current	24 A / 24 A				
MPPT number/Max. input strings number	2/2				
Battery					
Battery type	Li-ion / Lead-acid				
Battery voltage range	42 - 58 V				
Battery capacity	50 - 2000 Ah				
Max. charge / discharge power	3 kW	3.6 kW	4.6 kW	5 kW	6 kW
Max. charge / discharge current	62.5 A	75 A	100 A	105 A	125 A
Communication	CAN				
Output AC (Grid side)					
Rated output power	3 kW	3.6 kW	4.6 kW	5 kW	6 kW
Max. apparent output power	3 kVA	3.6 kVA	4.6 kVA	5 kVA	6 kVA
Operation phase	1/N/PE				
Rated grid voltage	220 V / 230 V				
Rated grid frequency	50 Hz / 60 Hz				
Rated grid output current	13.6 A / 13 A	16.4 A / 15.7 A	20.9 A / 20 A	22.7 A / 21.7 A	27.3 A / 26.1 A
Max. output current	13.6 A / 13 A	16.4 A / 15.7 A	20.9 A / 20 A	22.7 A / 21.7 A	27.3 A / 26.1 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)				
THDi	<2%				
Input AC (Grid side)					
Input voltage range	187-253 V				
Max. input current	20 A	24.6 A	31.4 A	32 A	40 A
Frequency range	45-55 Hz / 55-65 Hz				
Output AC (Back-up)					
Rated output power	3 kW	3.6 kW	4.6 kW	5 kW	6 kW
Max. apparent output power	4.2 kVA, 60 sec	5 kVA, 60 sec	6.4 kVA, 60 sec	7 kVA, 60 sec	8 kVA, 60 sec
Back-up switch time	<10 ms				
Rated output voltage	1/N/PE, 220 V / 230 V				
Rated frequency	50 Hz / 60 Hz				
Max. output current	19.1 A	22.7 A	29.1 A	31.8 A	36.4 A
THDv (@linear load)	<2%				
Efficiency					
Max. efficiency	> 97.0%		> 97.5%		
EU efficiency	> 96.2%				
BAT charged by PV Max. efficiency	> 94.9%				
BAT charged/discharged to AC Max. efficiency	> 94.33%/93.51%				
Protection					
DC reverse-polarity protection	Yes				
Ground fault monitoring	Yes				
Integrated AFCI (DC arc-fault circuit protection)	Yes ⁽¹⁾				
Protection class/Over voltage category	I/II				
General Data					
Dimensions (W*H*D)	405*480*205 mm				
Weight	20.3 kg		22.4 kg		
Topology	High frequency isolation (for battery)				
Operating ambient temperature range	-25 ~ +60°C				
Ingress protection	IP66				
Cooling concept	Natural convection				
Max. operation altitude	4000 m				
Grid connection standard	G98 or G99, VDE-AR-N 4105 / VDE V 0124, EN 50549-1, VDE 0126 / UTE C 15 / VFR:2019, RD 1699 / RD 244 / UNE 206006 / UNE 206007-1, CEI 0-21, C10/11, NRS 097-2-1, TOR, EIFS 2018.2, IEC 62116, IEC 61727, IEC 60068, IEC 61683, EN 50530, MEA, PEA				
Safety/EMC standard	IEC/EN 62109-1/-2, EN 61000-6-1/-2/-3/-4				
Features					
DC connection	MC4 connector				
AC connection	Quick connection plug				
Display	LED + APP				
Communication	RS485, CAN, Optional: Wi-Fi, GPRS, LAN				

(1) Activation required.

RHI-3P(5-10)K-HVES-5G

Solis Three Phase High Voltage Energy Storage Inverters

Features:

- Max. efficiency 98.4%
- 2 MPPT and 4 DC input; Max 26A DC input current
- 3 operating modes (self-consumption; time-of-use; off-grid back-up) & programmable energy management
- Power supply can be switched automatically and switching time within 40ms
- Ensures AC backup for up to 10kW of continuous power and 16kVA of peak power
- Time of use shifting and peak shaving capabilities to grid
- AFCI protection, proactively reduces fire risk
- Intelligent EMS function
- Support three-phase imbalance on backup output port
- 24-hour fully intelligent energy management, Real-time grasp of PV plant status
- Remotely control & upgrade function, making digital power plant maintenance at your fingertips

Models:

RHI-3P5K-HVES-5G / RHI-3P6K-HVES-5G

RHI-3P8K-HVES-5G / RHI-3P10K-HVES-5G



360° View



DATASHEET

RHI-3P(5-10)K-HVES-5G

Models	5K	6K	8K	10K
Input DC (PV side)				
Recommended max. PV power	8 kW	9.6 kW	12.8 kW	16 kW
Max. input voltage	1000 V			
Rated voltage	600 V			
Start-up voltage	160 V			
MPPT voltage range	200-850 V			
Max. input current	13 A / 13 A		26 A / 13 A	26 A / 26 A
Max. short circuit current	16.5 A / 16.5 A		32.5 A / 16.5 A	32.5 A / 32.5 A
MPPT number/Max. input strings number	2/2		2/3	2/4
Battery				
Battery type	Li-ion			
Battery voltage range	160-600 V			
Max. charge / discharge power	5 kW	6 kW	8 kW	10 kW
Max. charge / discharge current	25 A			
Communication	CAN			
Input AC (Grid side)				
Input voltage range	320-480 V			
Max. apparent input power	5 kVA	6 kVA	8 kVA	10 kVA
Max. input current	25 A			
Frequency range	45-55 Hz / 55-65 Hz			
Output AC (Grid side)				
Rated output power	5 kW	6 kW	8 kW	10 kW
Max. apparent output power	5.5 kVA	6.6 kVA	8.8 kVA	10 kVA
Operation phase	3/N/PE			
Rated grid voltage	380 V / 400 V			
Rated grid frequency	50 Hz / 60 Hz			
Rated grid output current	7.6 A / 7.3 A	9.2 A / 8.7 A	12.2 A / 11.6 A	15.2 A / 14.5 A
Max. output current	8.4 A	10 A	13.4 A	16.7 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)			
THDi	<2%			
Output AC (Back-up)				
Rated output power	5 kW	6 kW	8 kW	10 kW
Peak apparent output power	10 kVA, 60 sec	12 kVA, 60 sec	16 kVA, 60 sec	16 kVA, 60 sec
Back-up switch time	< 40 ms			
Rated output voltage	3/N/PE, 380 V / 400 V			
Rated frequency	50 Hz / 60 Hz			
Rated output current	7.6 A / 7.3 A	9.2 A / 8.7 A	12.2 A / 11.6 A	15.2 A / 14.5 A
THDv (@linear load)				
Efficiency				
Max. efficiency	98.4%			
EU efficiency	97.7%			
MPPT efficiency	99.9%			
Battery charge/discharge efficiency	97.5%			
Protection				
Anti-islanding protection	Yes			
Output over current protection	Yes			
Short circuit protection	Yes			
Integrated AFCI (DC arc-fault circuit protection)	Yes ⁽¹⁾			
Integrated DC switch	Optional			
DC reverse-polarity protection	Yes			
PV over voltage protection	Yes			
Battery reverse protection	Yes			
General Data				
Dimensions (W*H*D)	535*455*185 mm			
Weight	25.1 kg			
Topology	Transformerless			
Standby consumption	<15 W			
Operating ambient temperature range	-25 ~ +60°C			
Relative humidity	0-100%			
Ingress protection	IP65			
Cooling concept	Natural convection			
Max. operation altitude	4000 m			
Grid connection standard	G98 or G99, VDE-AR-N 4105 / VDE V 0124, EN 50549-1, VDE 0126 / UTE C 15/VFR:2019, RD 1699/RD 244 / UNE 206006 / UNE 206007-1, CEI 0-21, C10/11, NRS 097-2-1, EIFS 2018.2, IEC 62116, IEC 61727, IEC 60068, IEC 61683, EN 50530, MEA, PEA			
Safety/EMC standard	IEC/EN 62109-1/-2, IEC/EN 61000-6-1/-3			
Features				
DC connection	MC4 connector			
AC connection	Quick connection plug			
Display	LCD			
Communication	RS485, Optional: Wi-Fi, GPRS			

(1) Activation required.

S6-EH3P(5-10)K2-H

Solis Three Phase High Voltage Energy Storage Inverters

Features:

- Industry leading 50A/10kW max charge/discharge rating
- Automatic UPS switching
- Supports Peak Shaving Mode
- Pre-made Battery, Meter and CAN cabling to reduce installation time
- Supports Unbalanced and Half-Wave Loads on both the Grid and Backup Port
- Compatible with multiple brands of lithium battery models
- Increased battery protection and operation features to extend battery life

Models:

S6-EH3P5K2-H / S6-EH3P6K2-H

S6-EH3P8K2-H / S6-EH3P10K2-H



DATASHEET

S6-EH3P(5-10)K2-H

Models	5K2	6K2	8K2	10K2
Input DC (PV side)				
Recommended max. PV power	8 kW	9.6 kW	12.8 kW	16 kW
Max. input voltage	1000 V			
Rated voltage	600 V			
Start-up voltage	160 V			
MPPT voltage range	200-850 V			
Max. input current	16 A / 16 A			
Max. short circuit current	24 A / 24 A			
MPPT number/Max. input strings number	2/2			
Battery				
Battery type	Li-ion			
Battery voltage range	120-600 V			
Max. charge / discharge power	5 kW	6 kW	8 kW	10 kW
Max. charge / discharge current	25 A		50 A	
Communication	CAN/RS485			
Output AC (Grid side)				
Rated output power	5 kW	6 kW	8 kW	10 kW
Max. apparent output power	5 kVA	6 kVA	8 kVA	10 kVA
Rated grid voltage	3/N/PE, 380 V / 400 V			
Rated grid frequency	50 Hz / 60 Hz			
Rated grid output current	7.6 A / 7.2 A	9.1 A / 8.7 A	12.2 A / 11.5 A	15.2 A / 14.4 A
Max. output current	7.6 A / 7.2 A	9.1 A / 8.7 A	12.2 A / 11.5 A	15.2 A / 14.4 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)			
THDi	<3%			
Input AC (Grid side)				
Max. input power	7.5 kW	9 kW	12 kW	15 kW
Rated input current	11.4 A	13.8 A	18.2 A	22.8 A
Rated input voltage	3/N/PE, 380 V / 400 V			
Rated input frequency	50 Hz / 60 Hz			
Output AC (Back-up)				
Rated output power	5 kW	6 kW	8 kW	10 kW
Max. apparent output power	8 kVA, 60 sec	9.6 kVA, 60 sec	12.8 kVA, 60 sec	16 kVA, 60 sec
Back-up switch time	<10 ms			
Rated output voltage	3/N/PE, 380 V / 400 V			
Rated frequency	50 Hz / 60 Hz			
Rated output current	7.6 A / 7.2 A	9.1 A / 8.7 A	12.2 A / 11.5 A	15.2 A / 14.4 A
THDv (@linear load)	<2%			
Efficiency				
Max. efficiency	96.5%	97.0%	97.5%	97.9%
EU efficiency	96.8%	97.1%	97.4%	97.5%
BAT charged by PV Max. efficiency	98.4%	98.5%	98.2%	98.3%
BAT charged/discharged to AC Max. efficiency	97.3%	97.3%	97.5%	97.5%
Protection				
Anti-islanding protection	Yes			
Output over current protection	Yes			
Short circuit protection	Yes			
Integrated AFCI (DC arc-fault circuit protection)	Yes ⁽¹⁾			
Integrated DC switch	Yes			
DC reverse-polarity protection	Yes			
PV over voltage protection	Yes			
Battery reverse protection	Yes			
General Data				
Dimensions (W*H*D)	600*500*210 mm		600*500*230 mm	
Weight	27.6 kg		30.2 kg	
Topology	Transformerless			
Self-consumption (night)	<25 W			
Operating ambient temperature range	-25 ~ +60°C			
Relative humidity	0-95%			
Ingress protection	IP66			
Cooling concept	Natural convection			
Max. operation altitude	4000 m			
Grid connection standard	G98 or G99, VDE-AR-N 4105 / VDE V 0124, EN 50549-1, VDE 0126 / UTE C 15/VFR:2019, RD 1699/RD 244 / UNE 206006 / UNE 206007-1, CEI 0-21, C10/11, NRS 097-2-1, TOR, EIFS 2018.2, IEC 62116, IEC 61727, IEC 60068, IEC 61683, EN 50530, MEA, PEA			
Safety/EMC standard	IEC/EN 62109-1/-2, IEC/EN 61000-6-1/-3			
Features				
PV connection	MC4 connector			
Battery connection	Quick connection plug			
AC connection	Quick connection plug			
Display	LED + Bluetooth + APP			
Communication	CAN, RS485, Optional: Wi-Fi, Cellular, LAN			

(1) Activation required.

S6-EH3P(5-10)K-H-EU

Solis Three Phase High Voltage Energy Storage Inverters

Features:

- Integrated 3 or 4 MPPTs for multiple array orientations
- Industry leading 50A/10kW max charge/discharge rating
- Automatic UPS switching
- Supports Peak Shaving Mode
- Pre-made Battery, Meter and CAN cabling to reduce installation time
- Supports Unbalanced and Half-Wave Loads on both the Grid and Backup Port
- Compatible with multiple brands of lithium battery models
- Increased battery protection and operation features to extend battery life

Models:

S6-EH3P5K-H-EU / S6-EH3P6K-H-EU
 S6-EH3P8K-H-EU / S6-EH3P10K-H-EU



• Monitoring Portal – www.soliscloud.com or SolisCloud App • Compatible Batteries – Check online at www.solisinverters.com

DATASHEET

S6-EH3P(5-10)K-H-EU

Models	5K	6K	8K	10K
Input DC (PV side)				
Recommended max. PV power	8 kW	9.6 kW	12.8 kW	16 kW
Max. input voltage	1000 V			
Rated voltage	600 V			
Start-up voltage	160 V			
MPPT voltage range	200-850 V			
Max. input current	16 A / 16 A / 16 A		16 A / 16 A / 16 A / 16 A	
Max. short circuit current	24 A / 24 A / 24 A		24 A / 24 A / 24 A / 24 A	
MPPT number/Max. input strings number	3/3		4/4	
Battery				
Battery type	Li-ion			
Battery voltage range	120-600 V			
Max. charge / discharge power	5 kW	6 kW	8 kW	10 kW
Max. charge / discharge current	25 A		50 A	
Communication	CAN/RS485			
Output AC (Grid side)				
Rated output power	5 kW	6 kW	8 kW	10 kW
Max. apparent output power	5 kVA	6 kVA	8 kVA	10 kVA
Rated grid voltage	3/N/PE, 380 V / 400 V			
Rated grid frequency	50 Hz / 60 Hz			
Rated grid output current	7.6 A / 7.2 A	9.1 A / 8.7 A	12.2 A / 11.5 A	15.2 A / 14.4 A
Max. output current	7.6 A / 7.2 A	9.1 A / 8.7 A	12.2 A / 11.5 A	15.2 A / 14.4 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)			
THDi	<3%			
Input AC (Grid side)				
Max. input power	7.5 kW	9 kW	12 kW	15 kW
Rated input current	11.4 A	13.8 A	18.2 A	22.8 A
Rated input voltage	3/N/PE, 380 V / 400 V			
Rated input frequency	50 Hz / 60 Hz			
Output AC (Back-up)				
Rated output power	5 kW	6 kW	8 kW	10 kW
Max. apparent output power	8 kVA, 60 sec	9.6 kVA, 60 sec	12.8 kVA, 60 sec	16 kVA, 60 sec
Back-up switch time	<10 ms			
Rated output voltage	3/N/PE, 380 V / 400 V			
Rated frequency	50 Hz / 60 Hz			
Rated output current	7.6 A / 7.2 A	9.1 A / 8.7 A	12.2 A / 11.5 A	15.2 A / 14.4 A
THDv (@linear load)	<2%			
Efficiency				
Max. efficiency	96.5%	97.0%	97.5%	97.9%
EU efficiency	96.8%	97.1%	97.4%	97.5%
BAT charged by PV Max. efficiency	98.4%	98.5%	98.2%	98.3%
BAT charged/discharged to AC Max. efficiency	97.3%	97.3%	97.5%	97.5%
Protection				
Anti-islanding protection	Yes			
Output over current protection	Yes			
Short circuit protection	Yes			
Integrated AFCI (DC arc-fault circuit protection)	Yes ⁽¹⁾			
Integrated DC switch	Yes			
DC reverse-polarity protection	Yes			
PV over voltage protection	Yes			
Battery reverse protection	Yes			
General Data				
Dimensions (W*H*D)	600*500*210 mm		600*500*230 mm	
Weight	27.6 kg		30.2 kg	
Topology	Transformerless			
Self-consumption (night)	<25 W			
Operating ambient temperature range	-25 ~ +60°C			
Relative humidity	0-95%			
Ingress protection	IP66			
Cooling concept	Natural convection			
Max. operation altitude	4000 m			
Grid connection standard	G98 or G99, VDE-AR-N 4105 / VDE V 0124, EN 50549-1, VDE 0126 / UTE C 15/VFR:2019, RD 1699/RD 244 / UNE 206006 / UNE 206007-1, CEI 0-21, C10/11, NRS 097-2-1, TOR, EIFS 2018.2, IEC 62116, IEC 61727, IEC 60068, IEC 61683, EN 50530, MEA, PEA			
Safety/EMC standard	IEC/EN 62109-1/-2, IEC/EN 61000-6-1/-3			
Features				
PV connection	MC4 connector			
Battery connection	Quick connection plug			
AC connection	Quick connection plug			
Display	LED + Bluetooth + APP			
Communication	CAN, RS485, Optional: Wi-Fi, Cellular, LAN			

(1) Activation required.

S5-EA1P3K-L**Solis Single Phase Low Voltage AC-Coupled Inverters****Features:**

- Compatible with lead-acid and lithium batteries, with multiple battery protection features
- Compatible with any existing grid-tied PV system, option to upgrade
- Intelligent debugging APP which support one-click inverter configuration
- Various work mode for different application scenario
- Natural cooling without external fan

Models:

S5-EA1P3K-L

**DATASHEET****S5-EA1P3K-L**

Models	3K
Output AC (Grid side)	
Rated output power	3 kW
Max. output power	3 kW
Max. apparent output power	3 kVA
Operation phase	1/N/PE
Rated grid voltage	220 V / 230 V
Grid voltage range	184-264 V
Rated grid frequency	50 Hz / 60 Hz
Rated grid output current	13.6 A / 13 A
Max. output current	20 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)
THDi	<3%
Battery	
Battery type	Li-ion / Lead-acid
Battery voltage range	40-60 V
Battery capacity	50-2000 Ah
Max. charge / discharge current	60 A
Communication	CAN
Input AC (Grid side)	
Rated input voltage	220 V / 230 V
Input voltage range	184-264 V
Max. input current	13.6 A / 13 A
Rated grid frequency	50 Hz / 60 Hz
Frequency range	45-55 Hz / 55-65 Hz
Efficiency	
Max. battery charge efficiency	94.0%
Max. battery discharge efficiency	94.5%
Protection	
Battery reverse protection	Yes
Battery over and under voltage protection	Yes
Short circuit protection	Yes
Output over current protection	Yes
Temperature protection	Yes
General Data	
Dimensions (W*H*D)	405*510*150 mm
Weight	12.1 kg
Topology	High frequency isolation
Operating ambient temperature range	-25 ~ +60°C
Ingress protection	IP65
Cooling concept	Natural convection
Max. operation altitude	2000 m
Grid connection standard	G98 or G99, VDE-AR-N 4105/VDE V 0124, EN 50549-1, VDE 0126/UTE C 15/VFR:2019, RD 1699/RD 244/UNE 206006/UNE 206007-1, CEI 0-21, C10/11, NRS 097-2-1, TOR, EIFS 2018.2, IEC 62116, IEC 61727, IEC 60068, IEC 61683, MEA, PEA
Safety/EMC standard	IEC 62477, EN 61000-6-2/-3
Features	
DC connection	Screw terminal
AC connection	Screw clamp terminal (max. 6 mm ²)
Display	LCD
Communication	RS485, CAN, Optional: Wi-Fi, GPRS

S6-EA1P(3.6-6)K-L

Solis Single Phase Low Voltage AC-Coupled Inverters

Features:

- Supports Peak Shaving Mode
- Industry leading 125A/6kW max charge/discharge rating
- Provide intelligent time of use solution together with the monitoring group
- Compatible with multiple brands of lithium battery models
- 6 customisable charge/discharge time settings
- Increased battery protection and operation features to extend battery life

Models:

S6-EA1P3.6K-L
S6-EA1P4.6K-L
S6-EA1P5K-L
S6-EA1P6K-L



DATASHEET

S6-EA1P(3.6-6)K-L

Models	3.6K	4.6K	5K	6K
Battery				
Battery type	Li-ion			
Battery voltage range	40-60 V			
Max. charge power	3.6 kW	4.6 kW	5 kW	6 kW
Max. discharge power	3.9 kW	4.9 kW	5.3 kW	6.3 kW
Max. charge / discharge current	75 A	100 A	105 A	125 A
Communication	CAN			
Output AC (Grid side)				
Rated output power	3.6 kW	4.6 kW	5 kW	6 kW
Max. apparent output power	3.6 kVA	4.6 kVA	5 kVA	6 kVA
Operation phase	1/N/PE			
Rated grid voltage	220 V / 230 V			
Grid voltage range	187-253 V			
Rated grid frequency	50 Hz / 60 Hz			
Rated grid output current	16.4 A / 15.7 A	21 A / 20 A	22.8 A / 21.8 A	27.3 A / 26.1 A
Max. output current	16.4 A	21 A	22.8 A	27.3 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)			
THDi	<3%			
Input AC (Grid side)				
Input voltage range	187-253 V			
Max. input current	16.4 A / 15.7 A	21 A / 20 A	22.8 A / 21.8 A	27.3 A / 26.1 A
Max. input power	3.6 kW	4.6 kW	5 kW	6 kW
Frequency range	45-55 Hz / 55-65 Hz			
Efficiency				
BAT charged/discharged to AC Max. efficiency	> 93.5%			
Protection				
Protection class	I			
Over voltage category	DC II / AC III			
Battery reverse protection	Yes			
Battery over and under voltage protection	Yes			
Short circuit protection	Yes			
Output over current protection	Yes			
Temperature protection	Yes			
General Data				
Dimensions (W*H*D)	440*465*192 mm			
Weight	24.5 kg			
Topology	High frequency isolation			
Operating ambient temperature range	-25 ~ +60°C			
Relative humidity	0-95%			
Ingress protection	IP66			
Cooling concept	Natural convection			
Max. operation altitude	4000 m			
Grid connection standard	C10/11, 50549, G98, G99, VDE4105, AS4777.2, France			
Safety/EMC standard	IEC/EN 62109-1/-2, EN 61000-6-2/-3			
Features				
DC connection	Terminal Block			
AC connection	Quick connection plug			
Display	LED + APP			
Communication	RS485, CAN, Optional: Wi-Fi, LAN			


Off-grid Energy Storage Solutions




Solis EO series inverter is designed for residential off-grid systems in the countries without stable grid power, which can work with batteries to supply power to load and can also charge the batteries through PV plants, grid or generator.

The product has a variety of application scenarios combination modes, and can realize modular system assembly configuration according to needs. And can provide multiple products in parallel to form up to 30kW single-phase parallel operation system, which is very suitable for small industrial, commercial or residential energy storage projects.

Off-grid Energy Storage Solution - Single EO Inverter

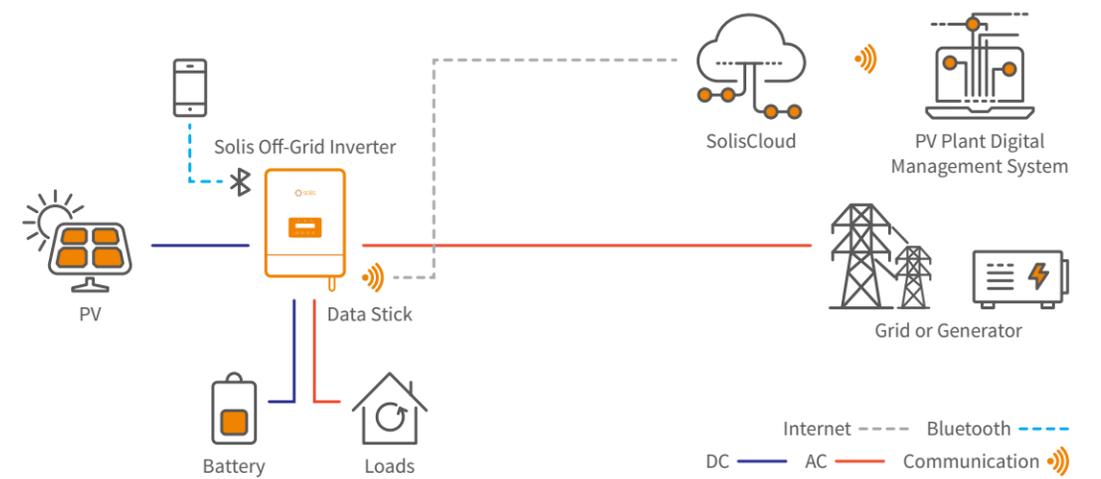

Off-grid Energy Storage Solution - Multiple Parallel EO Inverters

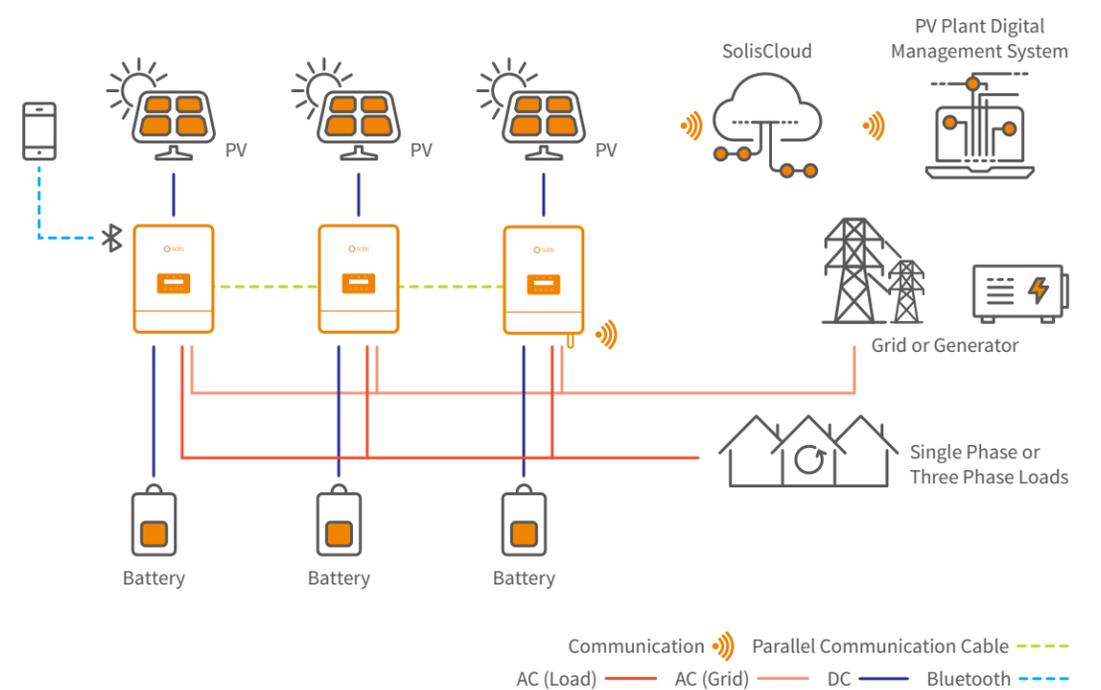

S6-E01P(4-5)K-48

Solis Single Phase Low Voltage Off-Grid Inverters

Features:

- One-click fast charging mode
- 6 customisable charge/discharge time settings
- Supports 1ph and 3ph flexible connection with max 30kW in parallel
- Generator connectivity with multiple input methods and automatic generator On/Off control
- The newly added force-charging period can optimize the revenue according to the difference of electricity price
- Battery equalization for increased battery performance and lifespan

Models:

S6-E01P4K-48 / S6-E01P5K-48



DATASHEET

S6-E01P(4-5)K-48

Models	4K	5K
Solar Charger		
Recommended max. PV power	5.5 kW	6.5 kW
Max. input voltage	500 V	
Start-up voltage	90 V	
MPPT voltage range	90-430 V	
Max. input current	32 A	
Max. short circuit current	40 A	
Max. solar charge current	100 A	
MPPT number/Max. input strings number	1/2	
Battery		
Battery type	Li-ion / Lead-acid	
Rated battery voltage	48 V	
Max. charge / discharge power	5 kW / 5 kW	
Max. charge / discharge current	100 A	
Communication	CAN/RS485	
Inverter Output		
Rated output power	4 kVA / 4 kW	5 kVA / 5 kW
Operation phase	1/N/PE	
Rated grid voltage	230 V ± 1%	
Rated grid frequency	50 Hz / 60 Hz ± 0.1%	
Surge capacity	8 kVA	10 kVA
Max. output current	20 A	25 A
Output voltage waveform	Pure sine wave	
Transfer time	10 ms typical, 20 ms Max	
THDv (@linear load)	<3%	
Peak efficiency (PV-AC)	96.6%	
AC Charger		
Rated input voltage	230 V	
Selectable voltage range	90-280 V	
AC frequency range	50 Hz / 60 Hz (Auto sensing)	
Max. AC charge current	60 A	80 A
Generator		
Rated input power	4 kW	5 kW
Rated input current	60 A	80 A
Protection		
Output over voltage protection	Yes	
Output over current protection	Yes	
Short circuit protection	Yes	
Surge protection	Yes	
Temperature protection	Yes	
Integrated AFCI (DC arc-fault circuit protection)	Yes	
General Data		
Dimensions (W*H*D)	335*450*160 mm	
Weight	14 kg	
Topology	High frequency non-isolation	
Relative humidity	5% - 95% (Non-condensing)	
Operating ambient temperature range	-10 ~ +60°C	
Storage temperature range	-25 ~ +60°C	
Ingress protection	IP21	
Max. operation altitude	2000 m	
Parallel capability	6 units	
Safety standard	IEC 62109, IEC 61000, 55011	
Features		
DC connection	Terminal connectors	
AC connection	Terminal connectors	
Display	LCD	
Communication	CAN, BMS, RS485, Dry-contact, Bluetooth, Optional: Wi-Fi	

Residential Solar PV Solutions




Solis residential string inverters are cost-effective and efficient green power leaders, providing smarter green power solutions for your residential buildings. A variety of models and solutions meet the needs of modern homes.

The portfolio includes single-phase and small three-phase string inverters, with a wide range of models, providing the best home green power solutions based on your application scenarios and specific needs. Solis Residential inverters are small and light, allowing for just one person to complete the installation. The overall design is sleek and modern, with low noise, particularly suitable for home installation without affecting people's daily activities. Via online or App, you can connect to SolisCloud for intelligent energy management. Simple operation and convenient.

Solis residential solutions are technically advanced, flexible and simplify integration with digital home automation equipment and smart grids.

Residential Solar PV Solution

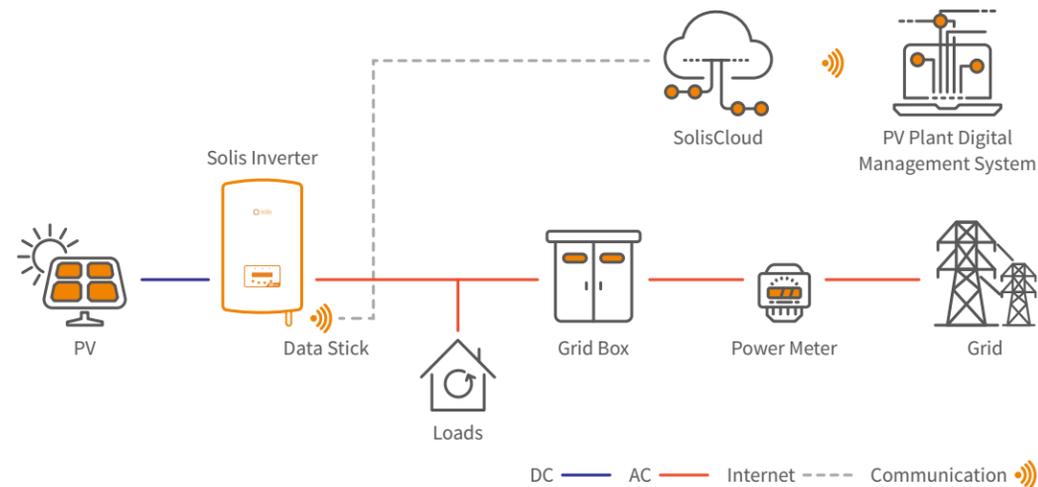

Models:

S6-GR1P(0.7-3.6)K-M / S6-GR1P(2.5-6)K
 S6-GR1P(7-8)K2 / S5-GR1P(7-10)K
 S5-GR3P(3-20)K

Output:

0.7 kW - 20 kW

S6-GR1P(0.7-3.6)K-M

Solis Single Phase Grid-Tied Inverters

Features:

- Max. efficiency 97.3%
- String current up to 14A
- Super high frequency switching technology
- Wide voltage range and low startup voltage
- Precise MPPT algorithm
- Integrated Export Power Manager (EPM)
- AFCI protection, proactively reduces fire risk
- Compact and lightweight
- Friendly and adaptable connection to the grid

Models:

S6-GR1P0.7K-M / S6-GR1P1K-M

S6-GR1P1.5K-M / S6-GR1P2K-M

S6-GR1P2.5K-M / S6-GR1P3K-M

S6-GR1P3.6K-M



360° View

DATASHEET

S6-GR1P(0.7-3.6)K-M

Models	0.7K	1K	1.5K	2K	2.5K	3K	3.6K
Input DC							
Recommended max. PV power	1.1 kW	1.5 kW	2.3 kW	3 kW	3.8 kW	4.5 kW	5.4 kW
Max. input voltage	600 V						
Rated voltage	200 V			330 V			
Start-up voltage	60 V			90 V			
MPPT voltage range	50-500 V			80-500 V			
Max. input current				14 A			19 A
Max. short circuit current				22 A			24 A
MPPT number/Max. input strings number				1/1			1/2
Output AC							
Rated output power	0.7 kW	1 kW	1.5 kW	2 kW	2.5 kW	3 kW	3.6 kW
Max. apparent output power	0.77 kVA	1.1 kVA	1.65 kVA	2.2 kVA	2.75 kVA	3.3 kVA	3.6 kVA
Max. output power	0.77 kW	1.1 kW	1.65 kW	2.2 kW	2.75 kW	3.3 kW	3.6 kW
Rated grid voltage	1/N/PE, 220 V / 230 V						
Rated grid frequency	50 Hz / 60 Hz						
Rated grid output current	3.2 A / 3.0 A	4.5 A / 4.3 A	6.8 A / 6.5 A	9.1 A / 8.7 A	11.4 A / 10.9 A	13.6 A / 13 A	16 A
Max. output current	4.4 A	5.2 A	8.1 A	10.5 A	13.3 A	15.7 A	16 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)						
THDi	<3%						
Efficiency							
Max. efficiency	96.6%		96.6%	97.1%	97.1%		97.3%
EU efficiency	95.3%		95.4%	96.4%	96.7%		96.8%
Protection							
DC reverse-polarity protection				Yes			
Short circuit protection				Yes			
Output over current protection				Yes			
Surge protection				Yes			
Grid monitoring				Yes			
Anti-islanding protection				Yes			
Temperature protection				Yes			
Integrated AFCI (DC arc-fault circuit protection)				Yes ⁽¹⁾			
Integrated DC switch				Optional			
General Data							
Dimensions (W*H*D)				310*373*160 mm			
Weight				7.4 kg		7.7 kg	
Topology	Transformerless						
Self-consumption (night)	<1 W						
Operating ambient temperature range	-25 ~ +60°C						
Relative humidity	0-100%						
Ingress protection	IP66						
Cooling concept	Natural convection						
Max. operation altitude	4000 m						
Grid connection standard	G98 or G99, VDE-AR-N 4105 / VDE V 0124, EN 50549-1, VDE 0126 / UTE C 15 / VFR:2019, RD 1699 / RD 244 / UNE 206006 / UNE 206007-1, CEI 0-21, C10/11, NRS 097-2-1, EIFS 2018.2, IEC 62116, IEC 61727, IEC 60068, IEC 61683, EN 50530, MEA, PEA						
Safety/EMC standard	IEC/EN 62109-1/-2, IEC/EN 61000-6-1/-2/-3/-4						
Features							
DC connection	MC4 connector						
AC connection	Quick connection plug						
Display	LCD						
Communication	RS485, Optional: Wi-Fi, GPRS						

(1) Activation required.

S6-GR1P(2.5-6)K

Solis Single Phase Grid-Tied Inverters

Features:

- Max. efficiency 97.7%
- String current up to 14A
- Super high frequency switching technology
- Wide voltage range and low startup voltage
- 2 MPPT design with precise MPPT algorithm
- Integrated Export Power Manager (EPM)
- AFCI protection, proactively reduces fire risk
- Compact and lightweight
- Friendly and adaptable connection to the grid

Models:

S6-GR1P2.5K / S6-GR1P3K

S6-GR1P3.6K / S6-GR1P4K

S6-GR1P4.6K / S6-GR1P5K

S6-GR1P6K



360° View

DATASHEET

S6-GR1P(2.5-6)K

Models	2.5K	3K	3.6K	4K	4.6K	5K	6K
Input DC							
Recommended max. PV power	3.75 kW	4.5 kW	5.4 kW	6 kW	6.9 kW	7.5 kW	9 kW
Max. input voltage	550 V	600 V					
Rated voltage	250 V	330 V					
Start-up voltage	60 V	120 V					
MPPT voltage range	50-450 V	90-520 V					
Max. input current				14 A / 14 A			
Max. short circuit current				22 A / 22 A			
MPPT number/Max. input strings number				2/2			
Output AC							
Rated output power	2.5 kW	3 kW	3.6 kW	4 kW	4.6 kW	5 kW	6 kW
Max. apparent output power	2.8 kVA	3.3 kVA	4 kVA	4.4 kVA	5 kVA	5 kVA	6 kVA
Max. output power	2.8 kW	3.3 kW	4 kW	4.4 kW	5 kW	5 kW	6 kW
Rated grid voltage	1/N/PE, 220 V / 230 V						
Rated grid frequency	50 Hz / 60 Hz						
Rated grid output current	11.4 A / 10.9 A	13.6 A / 13.0 A	16.0 A / 15.7 A	18.2 A / 17.4 A	20.9 A / 20.0 A	22.7 A / 21.7 A	27.3 A
Max. output current	13.3 A	15.7 A	16.0 A	21.0 A	23.8 A	25.0 A	27.3 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)						
THDi	<3%						
Efficiency							
Max. efficiency	97.3%	97.3%			97.6%	97.7%	
EU efficiency	96.5%	96.6%			97.1%	97.1%	
Protection							
DC reverse-polarity protection				Yes			
Short circuit protection				Yes			
Output over current protection				Yes			
Surge protection				Yes			
Grid monitoring				Yes			
Anti-islanding protection				Yes			
Temperature protection				Yes			
Integrated AFCI (DC arc-fault circuit protection)				Yes ⁽¹⁾			
Integrated DC switch				Optional			
General Data							
Dimensions (W*H*D)				310*543*160 mm			
Weight	11 kg	11.2 kg	12 kg				
Topology	Transformerless						
Self-consumption (night)	<1 W						
Operating ambient temperature range	-25 ~ +60°C						
Relative humidity	0-100%						
Ingress protection	IP66						
Cooling concept	Natural convection						
Max. operation altitude	4000 m						
Grid connection standard	G98 ⁽²⁾ or G99, VDE-AR-N 4105 / VDE V 0124, EN 50549-1, VDE 0126 / UTE C 15 / VFR:2019, RD 1699 / RD 244 / UNE 206006 / UNE 206007-1, CEI 0-21, C10/11, NRS 097-2-1, EIFS 2018.2, IEC 62116, IEC 61727, IEC 60068, IEC 61683, EN 50530, MEA, PEA						
Safety/EMC standard	IEC/EN 62109-1/-2, IEC/EN 61000-6-2/-3						
Features							
DC connection	MC4 connector						
AC connection	Quick connection plug						
Display	LCD						
Communication	RS485, Optional: Wi-Fi, GPRS						

(1) Activation required. (2) G98 for 2.5K-3.6K.

S6-GR1P(7-8)K2

Solis Single Phase Grid-Tied Inverters

Features:

- Max. efficiency 97.7%
- String current up to 14A
- Wide voltage range and low startup voltage
- 2 MPPT design with precise MPPT algorithm
- Integrated Export Power Manager (EPM)
- AFCI protection, proactively reduces fire risk
- Compact and lightweight
- Friendly and adaptable connection to the grid

Models:

S6-GR1P7K2

S6-GR1P8K2



DATASHEET

S6-GR1P(7-8)K2

Models	7K2	8K2
Input DC		
Recommended max. PV power	10.5 kW	12 kW
Max. input voltage	600 V	
Rated voltage	330 V	
Start-up voltage	90 V	
MPPT voltage range	90-520 V	
Max. input current	14 A / 28 A	
Max. short circuit current	19.5 A / 35 A	
MPPT number/Max. input strings number	2/3	
Output AC		
Rated output power	7 kW	8 kW
Max. apparent output power	7.7 kVA	8 kVA
Max. output power	7.7 kW	8 kW
Rated grid voltage	1/N/PE, 220 V / 230 V	
Rated grid frequency	50 Hz / 60 Hz	
Rated grid output current	31.8 A / 30.4 A	36.4 A / 34.8 A
Max. output current	35 A	36.4 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)	
THDi	<3%	
Efficiency		
Max. efficiency	97.7%	
EU efficiency	96.8%	
Protection		
DC reverse-polarity protection	Yes	
Short circuit protection	Yes	
Output over current protection	Yes	
Surge protection	Yes	
Grid monitoring	Yes	
Anti-islanding protection	Yes	
Temperature protection	Yes	
Integrated AFCI (DC arc-fault circuit protection)	Yes ⁽¹⁾	
Integrated DC switch	Optional	
General Data		
Dimensions (W*H*D)	310*543*180 mm	
Weight	13 kg	
Topology	Transformerless	
Self-consumption (night)	<1 W	
Operating ambient temperature range	-25 ~ +60°C	
Relative humidity	0-100%	
Ingress protection	IP66	
Cooling concept	Natural convection	
Max. operation altitude	4000 m	
Grid connection standard	G98 or G99, EN 50549-1, RD 1699 / RD 244 / UNE 206006 / UNE 206007-1, IEC 62116, IEC 61727, IEC60068, IEC 61683, EN 50530	
Safety/EMC standard	IEC/EN 62109-1/-2, IEC/EN 61000-6-1/-2/-3/-4	
Features		
DC connection	MC4 connector	
AC connection	Quick connection plug	
Display	LCD	
Communication	RS485, Optional: Wi-Fi, GPRS	

(1) Activation required.

S5-GR1P(7-10)K

Solis Single Phase Grid-Tied Inverters

Features:

- Max. efficiency 98.0%
- Max. input current 14A
- Super high frequency switching technology
- Wide voltage range and low startup voltage
- 3 MPPT design with precise MPPT algorithm
- AFCI protection, proactively reduces fire risk
- Compact and lightweight
- Friendly and adaptable connection to the grid

Models:

S5-GR1P7K / S5-GR1P8K

S5-GR1P9K / S5-GR1P10K



DATASHEET

S5-GR1P(7-10)K

Models	7K	8K	9K	10K
Input DC				
Recommended max. PV power	10.5 kW	12 kW	13.5 kW	15 kW
Max. input voltage	600 V			
Rated voltage	330 V			
Start-up voltage	120 V			
MPPT voltage range	100-500 V			
Max. input current	14 A / 14 A / 14 A			
Max. short circuit current	22 A / 22 A / 22 A			
MPPT number/Max. input strings number	3/3			
Output AC				
Rated output power	7 kW	8 kW	9 kW	10 kW
Max. apparent output power	7.7 kVA	8.8 kVA	9.9 kVA	10 kVA
Max. output power	7.7 kW	8.8 kW	9.9 kW	10 kW
Rated grid voltage	1/N/PE, 220 V / 230 V			
Rated grid frequency	50 Hz / 60 Hz			
Rated grid output current	31.8 A / 30.4 A	36.4 A / 34.8 A	40.9 A / 39.1 A	45.5 A / 43.5 A
Max. output current	33.7 A	36.6 A	41.3 A	45.9 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)			
THDi	<3%			
Efficiency				
Max. efficiency	98.0%			
EU efficiency	97.1%			
Protection				
DC reverse-polarity protection	Yes			
Short circuit protection	Yes			
Output over current protection	Yes			
Surge protection	Yes			
Grid monitoring	Yes			
Anti-islanding protection	Yes			
Temperature protection	Yes			
Integrated AFCI (DC arc-fault circuit protection)	Yes ⁽¹⁾			
Integrated DC switch	Optional			
General Data				
Dimensions (W*H*D)	333*579*253 mm			
Weight	18.5 kg			
Topology	Transformerless			
Self-consumption (night)	<1 W			
Operating ambient temperature range	-25 ~ +60°C			
Relative humidity	0-100%			
Ingress protection	IP66			
Cooling concept	Natural convection			
Max. operation altitude	4000 m			
Grid connection standard	G99, EN 50549-1, IEC 62116, IEC 61727, IEC60068, IEC 61683, EN 50530			
Safety/EMC standard	IEC/EN 62109-1/-2, IEC/EN 61000-6-1/-2/-3/-4			
Features				
DC connection	MC4 connector			
AC connection	OT Terminal			
Display	LCD			
Communication	RS485, Optional: Wi-Fi, GPRS			

(1) Activation required.

S5-GR3P(3-20)K

Solis Three Phase Grid-Tied Inverters

Efficient

- Max. efficiency 98.7%
- String current up to 16A
- Wide voltage range and low startup voltage

Smart

- Supports export power control
- Supports RS485, WiFi, GPRS
- Scan to register on SolisCloud, supports remote upgrade and control

Safe

- IP66
- AFCI protection, proactively reduces fire risk
- Automatic voltage stabilization technology in weak grid conditions

Economic

- Compact design, simple installation and maintenance
- > 150% DC/AC ratio
- Supports high power modules for lower installation costs

Models:

S5-GR3P3K / S5-GR3P4K

S5-GR3P5K / S5-GR3P6K

S5-GR3P8K / S5-GR3P9K

S5-GR3P10K / S5-GR3P12K

S5-GR3P13K / S5-GR3P15K

S5-GR3P17K / S5-GR3P20K



360° View

DATASHEET

S5-GR3P(3-20)K

Models	3K	4K	5K	6K	8K	9K	10K	12K	13K	15K	17K	20K	
Input DC													
Recommended max. PV power	4.5 kW	6 kW	7.5 kW	9 kW	12 kW	13.5 kW	15 kW	18 kW	19.5 kW	22.5 kW	25.5 kW	30 kW	
Max. input voltage	1100 V												
Rated voltage	600 V												
Start-up voltage	180 V												
MPPT voltage range	160-1000 V												
Max. input current	16 A / 16 A						32 A / 32 A						
Max. short circuit current	20 A / 20 A						40 A / 40 A						
MPPT number/Max. input strings number	2/2						2/4						
Output AC													
Rated output power	3 kW	4 kW	5 kW	6 kW	8 kW	9 kW	10 kW	12 kW	13 kW	15 kW	17 kW	20 kW	
Max. apparent output power	3.3 kVA	4.4 kVA	5.5 kVA	6.6 kVA	8.8 kVA	9.9 kVA	11 kVA	13.2 kVA	14.3 kVA	16.5 kVA	18.7 kVA	22 kVA	
Max. output power	3.3 kW	4.4 kW	5.5 kW	6.6 kW	8.8 kW	9.9 kW	11 kW	13.2 kW	14.3 kW	16.5 kW	18.7 kW	22 kW	
Rated grid voltage	3/N/PE, 220 V / 380 V, 230 V / 400 V												
Rated grid frequency	50 Hz / 60 Hz												
Rated grid output current	4.6 A / 4.3 A	6.1 A / 5.8 A	7.6 A / 7.2 A	9.1 A / 8.7 A	12.2 A / 11.5 A	13.7 A / 13.0 A	15.2 A / 14.4 A	18.2 A / 17.3 A	19.8 A / 18.8 A	22.8 A / 21.7 A	25.8 A / 24.6 A	30.4 A / 28.9 A	
Max. output current	4.7 A	6.4 A	7.9 A	9.5 A	12.7 A	14.3 A	15.9 A	19.1 A	20.7 A	23.8 A	27 A	31.8 A	
Power factor	>0.99 (0.8 leading - 0.8 lagging)												
THDi	<2%												
Efficiency													
Max. efficiency	98.3%						98.5%			98.6%			98.7%
EU efficiency	97.7%						97.9%			98.0%			98.1%
Protection													
DC reverse-polarity protection	Yes												
Short circuit protection	Yes												
Output over current protection	Yes												
Surge protection	Yes												
Grid monitoring	Yes												
Anti-islanding protection	Yes												
Temperature protection	Yes												
Integrated AFCI (DC arc-fault circuit protection)	Yes ⁽¹⁾												
Integrated DC switch	Optional												
General Data													
Dimensions (W*H*D)	310*563*219 mm												
Weight	16.5 kg				17.6 kg			18.5 kg		19.5 kg		21.1 kg	
Topology	Transformerless												
Self-consumption (night)	<1 W												
Operating ambient temperature range	-25 ~ +60°C												
Relative humidity	0-100%												
Ingress protection	IP66												
Cooling concept	Natural convection						Intelligent redundant fan-cooling						
Max. operation altitude	4000 m												
Grid connection standard	G99, VDE-AR-N 4105 / VDE V 0124, EN 50549-1, VDE 0126 / UTE C 15 / VFR:2019, RD 1699 / RD 244 / UNE 206006 / UNE 206007-1, CEI 0-21, C10/11, NRS 097-2-1, EIFS 2018.2, IEC 62116, IEC 61727, IEC 60068, IEC 61683, EN 50530												
Safety/EMC standard	IEC/EN 62109-1/-2, IEC/EN 61000-6-1/-2/-3/-4												
Features													
DC connection	MC4 connector												
AC connection	Quick connection plug												
Display	LCD												
Communication	RS485, Optional: Wi-Fi, GPRS												

(1) Activation required.

Residential Power Plant Case Study



📍 Finland
⚡ 6.7kW 📦 S5-GR3P(3-20)K



📍 USA
⚡ 16kW 📦 Solis-(2.5-6)K-4G-US

Microgrid Project in Hebei Province

This microgrid project in Hebei province uses Solis-3P(12-25)K-5G and Solis-(25-50)K-5G inverters. Through the configuration of an energy storage system, the project adopts the mode of "Self-use, surplus electricity exported & sold back to the grid". This has realized consumption of new green energy to the region and delivers a stable income of about 1.6 million yuan annually.

In addition, the system is monitored in real-time via the SolisCloud platform which offers intelligent digital functions, online system control, along with accurate operation and maintenance. This in turn makes power station management more efficient, convenient and cost effective.

This project demonstrates the technological progress and expansion of the solar industry, accelerating the development of clean, low-carbon energy.



📍 Australia
⚡ 8.2kW 📦 Solis-1P(2.5-6)K-4G



📍 UK
⚡ 2.8kW 📦 S6-GR1P(2.5-6)K



📍 China
⚡ 2.7MW
📦 GCI-3P(12-25)K-5G




Commercial Energy Storage Solutions



Solis commercial storage product S6-EH3P(30-50)K-H, is a highly integrated three-phase energy storage inverter, it has multiple functions, high safety level, strong energy supply reliability, which is a powerful tool for commercial PV energy storage projects.

It has 4 MPPT design, PV string current up to 20A, can be adapted to a variety of high-efficiency high-power PV module, to meet a variety of complex commercial roof application requirements; At the same time, the product can be compatible with a variety of generators can automatically control the generator start and stop, and support the generator port function expansion, to achieve backup loads redundancy or grid-tied PV system coupling networking; the product supports up to 6 parallel operation, and contains rich security protection and intelligent control operation functions, which is very suitable for small enterprises PV energy storage needs.

Commercial Energy Storage Solution

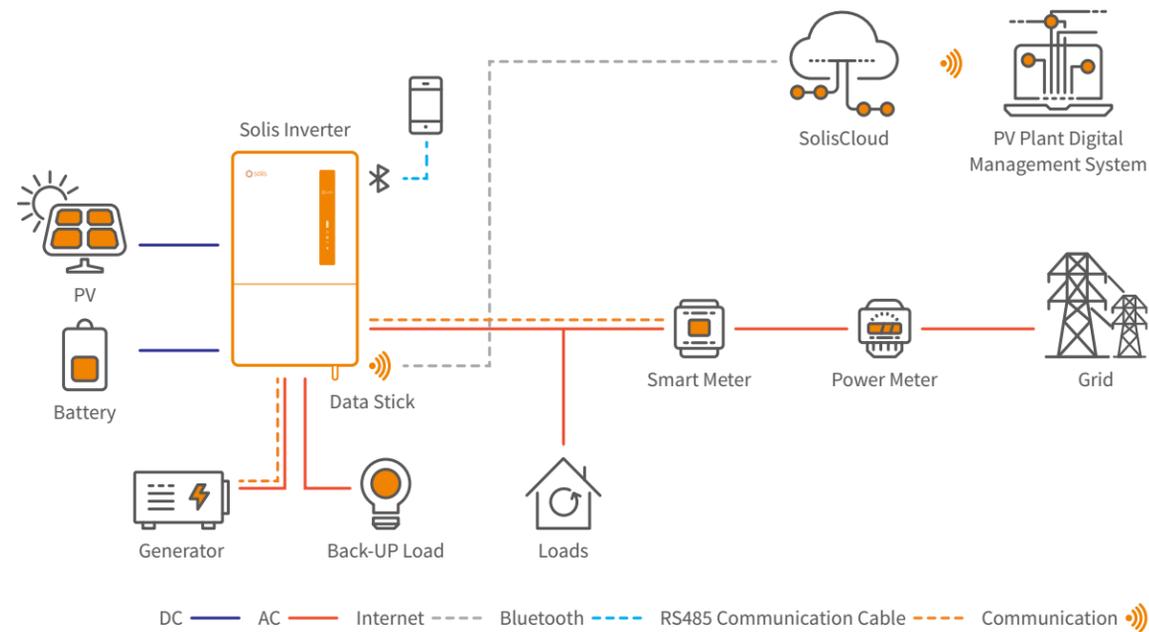

Models:

S6-EH3P(30-50)K-H

Output:

30 kW - 50 kW

S6-EH3P(30-50)K-H

Solis Three Phase High Voltage Energy Storage Inverters

Features:

- Integrated 4 MPPTs and string current up to 20A
- Up to 70A+70A/140A max charge/discharge current
- Supports peak shaving control in both "self-use" and "generator" mode
- Support 1.6 times overload in short time on Backup port
- Generator connectivity with multiple input methods and automatic generator On/Off control
- Max. 6 pcs parallel for on-grid and off-grid operation
- Increased battery protection and operation features to extend battery life
- Support wide voltage range suitable for multiple batteries

Models:

S6-EH3P30K-H

S6-EH3P40K-H

S6-EH3P50K-H



DATASHEET

S6-EH3P(30-50)K-H

Models	30K	40K	50K
Input DC (PV side)			
Recommended max. PV power	42 kW	56 kW	70 kW
Max. input voltage		1000 V	
Rated voltage		600 V	
Start-up voltage		180 V	
MPPT voltage range		150-850 V	
Max. input current	3*40 A		4*40 A
Max. short circuit current	3*60 A		4*60 A
MPPT number/Max. input strings number	3*6		4*8
Battery			
Battery type		Li-ion	
Battery voltage range		150-800 V	
Max. charge / discharge power	33 kW	44 kW	55 kW
Max. charge / discharge current		70 A*2 ⁽¹⁾	
No. of battery input		2	
Communication		CAN/RS485	
Output AC (Grid side)			
Rated output power	30 kW	40 kW	50 kW
Max. apparent output power	30 kVA	40 kVA	50 kVA
Rated grid voltage		3/N/PE, 380 V / 400 V	
Rated grid frequency		50 Hz / 60 Hz	
Rated grid output current	45.6 A / 43.3 A	60.8 A / 57.7 A	76 A / 72.2 A
Max. output current	45.6 A / 43.3 A	60.8 A / 57.7 A	76 A / 72.2 A
Power factor		>0.99 (0.8 leading - 0.8 lagging)	
THDi		< 3%	
Input AC (Grid side)			
Max. Continuous AC Passthrough		152 A	
Rated input voltage		3/N/PE, 380 V / 400 V	
Rated input frequency		50 Hz / 60 Hz	
Input Generator			
Max. input power	30 kW	40 kW	50 kW
Rated input voltage		3/N/PE, 380 V / 400 V	
Rated input frequency		50 Hz / 60 Hz	
Output AC (Back-up)			
Rated output power	30 kW	40 kW	50 kW
Max. apparent output power		1.6 time of rated power, 2 S	
Back-up switch time		< 10 ms	
Rated output voltage		3/N/PE, 380 V / 400 V	
Rated frequency		50 Hz / 60 Hz	
Rated output current	45.6 A / 43.3 A	60.8 A / 57.7 A	76 A / 72.2 A
THDv (@linear load)		< 2%	
Efficiency			
Max. efficiency		97.6%	
EU efficiency		97.0%	
BAT charged by PV Max. efficiency		98.5%	
BAT charged/discharged to AC Max. efficiency		97.5%	
Protection			
Anti-islanding protection		Yes	
Output over current protection		Yes	
Short circuit protection		Yes	
Integrated DC switch		Optional	
DC reverse-polarity protection		Yes	
Surge protection		DC Type II / AC Type II	
Integrated AFCI (DC arc-fault circuit protection)		Yes ⁽²⁾	
General Data			
Dimensions (W*H*D)		530*880*290 mm	
Weight		73 kg	
Topology		Non-isolated	
Self-consumption (night)		<25 W	
Operating ambient temperature range		-25 ~ +60°C	
Relative humidity		0-95%	
Ingress protection		IP66	
Cooling concept		Intelligent redundant fan-cooling	
Max. operation altitude		4000 m	
Grid connection standard		G98 or G99, VDE-AR-N 4105 / VDE V 0124, EN 50549-1, VDE 0126 / UTE C 15 / VFR:2019, RD 1699 / RD 244 / UNE 206006 / UNE 206007-1, CEI 0-21, C10/11, NRS 097-2-1, TOR, EIFS 2018.2, IEC 62116, IEC 61727, IEC 60068, IEC 61683, EN 50530, MEA, PEA	
Safety/EMC standard		IEC/EN 62109-1/-2, IEC/EN 61000-6-1/-3	
Features			
PV connection		MC4 Quick connection plug	
Battery connection		OT terminal	
AC connection		OT terminal	
Display		LED + Bluetooth + APP	
Communication		CAN, RS485, Ethernet, Optional: Wi-Fi, Cellular, LAN	

(1) Supporting parallel 140A input. (2) Activation required.

Commercial & Industrial Solar PV Solutions

Solis industrial and commercial string inverter product line is rich, the power range covers 25kW - 110kW, no matter how large your design and requirements are, we can rely on our flexible products to provide you with the best industry green power solutions.

Solis provides the most extensive industrial and commercial string inverter products on the market, and the products are sold well in various countries and regions in the world. They perform well in various harsh and complex environments, and are very stable and reliable.

Solis' C&I products are compatible with modularity and flexibility in program design. From the perspective of inverter performance improvement, we provide an ideal solution for simplifying system planning and design. Including optimizing software algorithms, optimizing hardware port compatibility, etc., to improve system efficiency and reduce system investment costs.

The power range of Solis' C&I products covers a wide range, with a single power up to 110kW. High-efficiency and high-power-density inverters can reduce installation and maintenance workloads and improve overall cost efficiency.

Solis' C&I solutions are supplemented by a series of advanced digital services based on SolisCloud, simplifying the application difficulty of intelligent systems, and providing you with more complete, high-quality and efficient cloud intelligent operation and maintenance solutions.

Models: S5-GC(25-40)K / S5-GC(50-60)K

Solis-80K-5G / S5-GC80K


Solis-(80-110)K-5G-PRO

Solis-(100-110)K-5G

S5-GC(100-110)K

Output: 25kW - 110kW

Commercial & Industrial Solar PV Solution

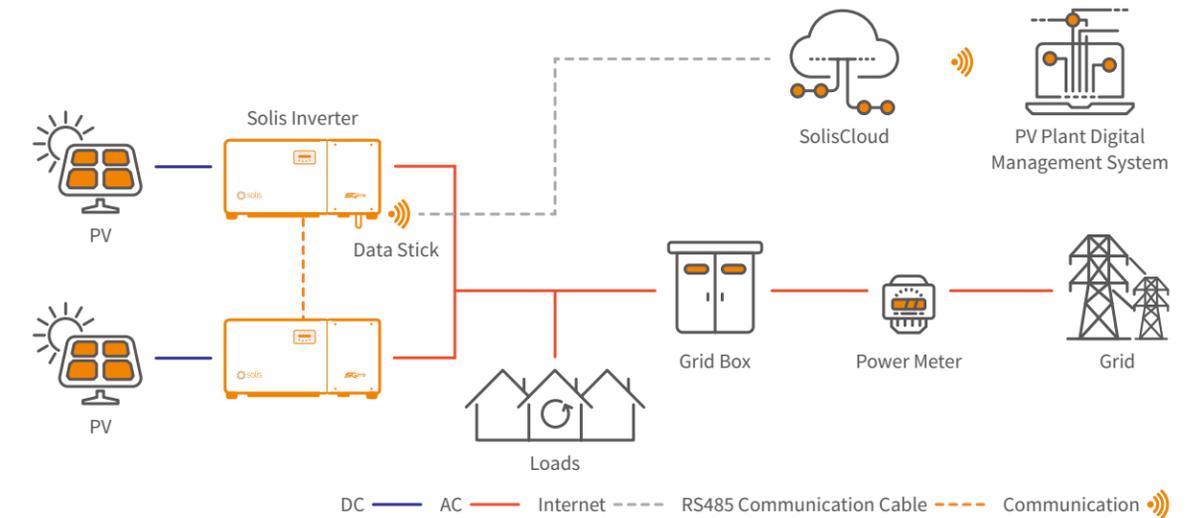

S5-GC(25-40)K

Solis Three Phase Grid-Tied Inverters

Efficient

- Max. efficiency 98.7%
- String current up to 16A
- 3/4 MPPT design, supports multiple orientation system design
- Night time PID recovery function, increases overall system yield (optional)
- Wide voltage range and low startup voltage

Smart

- Supports export power control
- Intelligent string monitoring, smart I-V curve scan
- Supports RS485, WiFi, GPRS
- Scan to register on SolisCloud, supports remote upgrade and control

Safe

- IP66
- AFCI protection, proactively reduces fire risk
- Globally recognised branded componentry for longer life
- Intelligent redundant fan-cooling

Economic

- Supports GPRS/WiFi communication with less wiring and reduced installation costs
- > 150% DC/AC ratio
- Supports high power modules for lower installation costs

Models:

S5-GC25K / S5-GC30K

S5-GC33K / S5-GC36K

S5-GC40K



360° View

DATASHEET

S5-GC(25-40)K

Models	25K	30K	33K	36K	40K
Input DC					
Recommended max. PV power	37.5 kW	45 kW	49.5 kW	54 kW	60 kW
Max. input voltage	1100 V				
Rated voltage	600 V				
Start-up voltage	180 V				
MPPT voltage range	200-1000 V				
Max. input current	32 A / 32 A / 32 A			4*32 A	
Max. short circuit current	40 A / 40 A / 40 A			4*40 A	
MPPT number/Max. input strings number	3/6			4/8	
Output AC					
Rated output power	25 kW	30 kW	33 kW	36 kW	40 kW
Max. apparent output power	27.5 kVA	33 kVA	36.3 kVA	39.6 kVA	44 kVA
Max. output power	27.5 kW	33 kW	36.3 kW	39.6 kW	44 kW
Rated grid voltage	3/N/PE, 220 V / 380 V, 230 V / 400 V				
Rated grid frequency	50 Hz / 60 Hz				
Rated grid output current	38.0 A / 36.1 A	45.6 A / 43.3 A	50.1 A / 47.6 A	54.7 A / 52.0 A	60.8 A / 57.7 A
Max. output current	41.8 A	50.2 A	55.1 A	60.2 A	66.9 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)				
THDi	<3%				
Efficiency					
Max. efficiency	98.5%		98.6%		98.7%
EU efficiency	98.1%		98.2%		98.3%
Protection					
DC reverse-polarity protection	Yes				
Short circuit protection	Yes				
Output over current protection	Yes				
Surge protection	DC Type II / AC Type II				
Grid monitoring	Yes				
Anti-islanding protection	Yes				
Temperature protection	Yes				
Strings monitoring	Yes				
I/V Curve scanning	Yes				
Integrated AFCI (DC arc-fault circuit protection)	Yes ⁽¹⁾				
Integrated PID recovery	Optional				
Integrated DC switch	Optional				
General Data					
Dimensions (W*H*D)	647*629*252 mm				
Weight	38.2 kg			42.1 kg	
Topology	Transformerless				
Self-consumption (night)	<1 W				
Operating ambient temperature range	-25 ~ +60°C				
Relative humidity	0-100%				
Ingress protection	IP66				
Cooling concept	Intelligent redundant fan-cooling				
Max. operation altitude	4000 m				
Grid connection standard	G99, VDE-AR-N 4105 / VDE V 0124, EN 50549-1, VDE 0126 / UTE C 15 / VFR:2019, RD 1699 / RD 244 / UNE 206006 / UNE 206007-1, CEI 0-21, C10/11, NRS 097-2-1, EIFS 2018.2, IEC 62116, IEC 61727, IEC60068, IEC 61683, EN 50530				
Safety/EMC standard	IEC/EN 62109-1/-2, IEC/EN 61000-6-1/-2/-3/-4				
Features					
DC connection	MC4 connector				
AC connection	OT terminal				
Display	LCD				
Communication	RS485, Optional: Wi-Fi, GPRS				

(1) Activation required.

S5-GC(50-60)K

Solis Three Phase Grid-Tied Inverters

Efficient

- Max. efficiency 98.7%
- String current up to 16A
- 5/6 MPPT design, supports multiple orientation system design
- Night time PID recovery function, increases overall system yield (optional)

Smart

- Night SVG function
- Supports export power control
- Intelligent string monitoring, smart I-V curve scan
- Scan to register on SolisCloud, supports remote upgrade and control

Safe

- IP66, C5 Anti-Corrosion Level
- Intelligent redundant fan-cooling
- Globally recognised branded componentry for longer life
- AFCI protection, proactively reduces fire risk

Economic

- Supports GPRS/WiFi communication with less wiring and reduced installation costs
- DC side supports "Y" connector
- 10/12 string inputs allow for 150%+ DC oversizing

Models:

S5-GC50K / S5-GC60K



360° View

DATASHEET

S5-GC(50-60)K

Models	50K	60K
Input DC		
Max. input voltage	1100 V	
Rated voltage	600 V	
Start-up voltage	195 V	
MPPT voltage range	180-1000 V	
Max. input current	5*32 A	6*32 A
Max. short circuit current	5*40 A	6*40 A
MPPT number/Max. input strings number	5/10	6/12
Output AC		
Rated output power	50 kW	60 kW
Max. apparent output power	55 kVA	66 kVA
Max. output power	55 kW	66 kW
Rated grid voltage	3/N/PE, 220 V / 380 V, 230 V / 400 V	
Rated grid frequency	50 Hz / 60 Hz	
Rated grid output current	76.0 A / 72.2 A	91.2 A / 86.6 A
Max. output current	83.6 A	100.3 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)	
THDi	<3%	
Efficiency		
Max. efficiency	98.7%	
EU efficiency	98.3%	
Protection		
DC reverse-polarity protection	Yes	
Short circuit protection	Yes	
Output over current protection	Yes	
Surge protection	DC Type II / AC Type II	
Grid monitoring	Yes	
Anti-islanding protection	Yes	
Temperature protection	Yes	
Strings monitoring	Yes	
I/V Curve scanning	Yes	
Integrated AFCI (DC arc-fault circuit protection)	Yes ⁽¹⁾	
Integrated PID recovery	Optional ⁽²⁾	
Integrated DC switch	Optional	
General Data		
Dimensions (W*H*D)	691*578*338 mm	
Weight	54.5 kg	
Topology	Transformerless	
Self-consumption (night)	<1 W	
Operating ambient temperature range	-25 ~ +60°C	
Relative humidity	0-100%	
Ingress protection	IP66	
Cooling concept	Intelligent redundant fan-cooling	
Max. operation altitude	4000 m	
Grid connection standard	G99, VDE-AR-N 4105 / VDE V 0124, EN 50549-1, VDE 0126 / UTE C 15 / VFR:2019, RD 1699 / RD 244 / UNE 206006 / UNE 206007-1, CEI 0-21, C10/11, NRS 097-2-1, EIFS 2018.2, IEC 62116, IEC 61727, IEC60068, IEC 61683, EN 50530	
Safety/EMC standard	IEC 62109-1/-2, IEC62116 & IEC 61000-6-1/-2/-3/-4	
Features		
DC connection	MC4 connector	
AC connection	OT terminal (max. 70 mm ²)	
Display	LCD, Capacitive touch buttons	
Communication	RS485, USB, Optional: Wi-Fi, GPRS	

(1) Activation required. (2) Due to the similar functional logic, when the night time PID-Recovery function is integrated, the night time var compensation function can not be used. Also, the negative grounding option is not available for inverters with night time PID-Recovery function.

Solis-80K-5G

Solis Three Phase Grid-Tied Inverters

Efficient

- 9 MPPTs, max. efficiency 98.7%
- > 150% DC/AC ratio
- Compatible with bifacial modules

Smart

- Night SVG function
- Intelligent string monitoring, smart I-V curve scan
- Remote firmware upgrade with simple operation

Safe

- IP66
- Built-in PID recovery for better module performance (optional)
- AFCI protection, proactively reduces fire risk
- Globally recognised branded componentry for longer life

Economic

- Power line communication (PLC) (optional)
- DC side supports "Y" connector

Models:

Solis-80K-5G



DATASHEET

Solis-80K-5G

Models	80K
Input DC	
Max. input voltage	1100 V
Rated voltage	600 V
Start-up voltage	195 V
MPPT voltage range	180-1000 V
Max. input current	9*26 A
Max. short circuit current	9*40 A
MPPT number/Max. input strings number	9/18
Output AC	
Rated output power	80 kW
Max. apparent output power	88 kVA
Max. output power	88 kW
Rated grid voltage	3/N/PE, 220 V / 380 V, 230 V / 400 V
Rated grid frequency	50 Hz / 60 Hz
Rated grid output current	121.6 A / 115.5 A
Max. output current	133.7 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)
THDi	<3%
Efficiency	
Max. efficiency	98.7%
EU efficiency	98.3%
Protection	
DC reverse-polarity protection	Yes
Short circuit protection	Yes
Output over current protection	Yes
Surge protection	DC Type II / AC Type II
Grid monitoring	Yes
Anti-islanding protection	Yes
Temperature protection	Yes
Strings monitoring	Yes
I/V Curve scanning	Yes
Integrated AFCI (DC arc-fault circuit protection)	Yes ⁽¹⁾
Integrated PID recovery	Optional
Integrated DC switch	Yes
Integrated AC switch	Optional
General Data	
Dimensions (W*H*D)	1050*567*314.5 mm (with AC switch)
Weight	82 kg
Topology	Transformerless
Self-consumption (night)	<2 W
Operating ambient temperature range	-30 ~ +60°C
Relative humidity	0-100%
Ingress protection	IP66
Cooling concept	Intelligent redundant fan-cooling
Max. operation altitude	4000 m
Grid connection standard	G98 or G99, VDE-AR-N 4105 / VDE-AR-N 4110 / VDE V 0124, EN 50549-1, VDE 0126 / UTE C 15 / VFR:2019, CEI 0-21, C10/11, NRS 097-2-1, TOR, EIFS 2018.2, IEC 62116, IEC 61727, IEC 60068, IEC 61683, EN 50530
Safety/EMC standard	IEC/EN 62109-1/-2, IEC/EN 61000-6-2/-4
Features	
DC connection	MC4 connector
AC connection	OT terminal (max. 185 mm ²)
Display	LCD
Communication	RS485, Optional: Wi-Fi, GPRS, PLC

(1) Activation required.

S5-GC80K**Solis Three Phase Grid-Tied Inverters****Efficient**

- 9 MPPTs, max. efficiency 98.7%
- > 150% DC/AC ratio
- String current up to 16A, perfectly match large current bifacial modules

Smart

- Night SVG function
- Intelligent string monitoring, smart I-V curve scan
- Remote firmware upgrade with simple operation

Safe

- IP66
- Built-in PID recovery for better module performance (optional)
- AFCI protection, proactively reduces fire risk
- Globally recognised branded componentry for longer life

Economic

- Power line communication (PLC) (optional)
- DC side supports "Y" connector

Models:

S5-GC80K



360° View

DATASHEET**S5-GC80K**

Models	80K
Input DC	
Max. input voltage	1100 V
Rated voltage	600 V
Start-up voltage	195 V
MPPT voltage range	180-1000 V
Max. input current	9*32 A
Max. short circuit current	9*40 A
MPPT number/Max. input strings number	9/18
Output AC	
Rated output power	80 kW
Max. apparent output power	88 kVA
Max. output power	88 kW
Rated grid voltage	3/N/PE, 220 V / 380 V, 230 V / 400 V
Rated grid frequency	50 Hz / 60 Hz
Rated grid output current	121.6 A / 115.5 A
Max. output current	133.7 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)
THDi	<3%
Efficiency	
Max. efficiency	98.7%
EU efficiency	98.3%
Protection	
DC reverse-polarity protection	Yes
Short circuit protection	Yes
Output over current protection	Yes
Surge protection	DC Type II / AC Type II
Grid monitoring	Yes
Anti-islanding protection	Yes
Temperature protection	Yes
Strings monitoring	Yes
I/V Curve scanning	Yes
Integrated AFCI (DC arc-fault circuit protection)	Yes ⁽¹⁾
Integrated PID recovery	Optional
Integrated DC switch	Yes
Integrated AC switch	Optional
General Data	
Dimensions (W*H*D)	1050*567*314.5 mm (with AC switch)
Weight	85 kg
Topology	Transformerless
Self-consumption (night)	<2 W
Operating ambient temperature range	-30 ~ +60°C
Relative humidity	0-100%
Ingress protection	IP66
Cooling concept	Intelligent redundant fan-cooling
Max. operation altitude	4000 m
Grid connection standard	G98 or G99, VDE-AR-N 4105 / VDE-AR-N 4110 / VDE V 0124, EN 50549-1, VDE 0126 / UTE C 15 / VFR:2019, CEI 0-21, C10/11, NRS 097-2-1, TOR, EIFS 2018.2, IEC 62116, IEC 61727, IEC 60068, IEC 61683, EN 50530
Safety/EMC standard	IEC/EN 62109-1/-2, IEC/EN 61000-6-2/-4
Features	
DC connection	MC4 connector
AC connection	OT terminal (max. 185 mm ²)
Display	LCD
Communication	RS485, Optional: Wi-Fi, GPRS, PLC

(1) Activation required.

Solis-(80-110)K-5G-PRO

Solis Three Phase Grid-Tied Inverters

Efficient

- 6/8 MPPTs, max. efficiency 98.5%
- > 150% DC/AC ratio
- Compatible with bifacial modules

Smart

- Night SVG function
- Intelligent string monitoring, smart I-V curve scan
- Remote firmware upgrade with simple operation

Safe

- IP66
- AFCI protection, proactively reduces fire risk
- Built-in PID recovery for better module performance (optional)
- Globally recognised branded componentry for longer life

Economic

- Power line communication (PLC) (optional)
- DC side supports "Y" connector

Models:

- Solis-80K-5G-PRO
- Solis-100K-5G-PRO
- Solis-110K-5G-PRO



DATASHEET

Solis-(80-110)K-5G-PRO

Models	80K	100K	110K
Input DC			
Max. input voltage	1100 V		
Rated voltage	600 V		
Start-up voltage	180 V		
MPPT voltage range	160-1000 V		
Max. input current	40 A / 32 A / 40 A / 32 A / 40 A / 32 A	40 A / 32 A / 40 A / 32 A / 40 A / 32 A / 40 A / 32 A	
Max. short circuit current	6*50 A	8*50 A	
MPPT number/Max. input strings number	6/12	8/16	
Output AC			
Rated output power	80 kW	100 kW	110 kW
Max. apparent output power	88 kVA	110 kVA	121 kVA
Max. output power	88 kW	110 kW	121 kW
Rated grid voltage	3/N/PE, 220 V / 380 V, 230 V / 400 V		
Rated grid frequency	50 Hz / 60 Hz		
Rated grid output current	121.6 A / 115.5 A	152.0 A / 144.3 A	167.1 A / 158.8 A
Max. output current	133.7 A	167.1 A	183.8 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)		
THDi	<3%		
Efficiency			
Max. efficiency	98.5%		
EU efficiency	98.0%		
Protection			
DC reverse-polarity protection	Yes		
Short circuit protection	Yes		
Output over current protection	Yes		
Surge protection	DC Type II / AC Type II		
Grid monitoring	Yes		
Anti-islanding protection	Yes		
Temperature protection	Yes		
Strings monitoring	Yes		
I/V Curve scanning	Yes		
Integrated AFCI (DC arc-fault circuit protection)	Yes ⁽¹⁾		
Integrated PID recovery	Optional		
Integrated DC switch	Yes		
Integrated AC switch	Optional		
General Data			
Dimensions (W*H*D)	1065*585*363 mm (with AC switch)	1183*585*363 mm	
Weight	79.5 kg	93 kg	
Topology	Transformerless		
Self-consumption (night)	<2 W		
Operating ambient temperature range	-30 ~ +60°C		
Relative humidity	0-100%		
Ingress protection	IP66		
Cooling concept	Intelligent redundant fan-cooling		
Max. operation altitude	4000 m		
Grid connection standard	G99, IEC61727, EN50549-1/2		
Safety/EMC standard	IEC/EN 62109-1/-2, IEC/EN 61000-6-2/-4		
Features			
DC connection	MC4 connector		
AC connection	OT terminal (max. 240 mm ²)		
Display	LCD		
Communication	RS485, Optional: Wi-Fi, GPRS, PLC		

(1) Activation required.

Solis-(100-110)K-5G

Solis Three Phase Grid-Tied Inverters

Efficient

- 10 MPPTs, max. efficiency 98.7%
- > 150% DC/AC ratio
- High power tracking density 100MPPT/MW
- Compatible with bifacial modules

Smart

- Night SVG function
- Intelligent string monitoring, smart I-V curve scan
- Remote firmware upgrade with simple operation

Safe

- AFCI protection, proactively reduces fire risk
- Built-in PID recovery for better module performance (optional)
- Overvoltage load reduction and leakage current suppression technology, low failure rate
- Globally recognised branded componentry for longer life

Economic

- Power line communication (PLC) (optional)
- DC side supports "Y" connector

Models:

Solis-100K-5G

Solis-110K-5G



360° View

DATASHEET

Solis-(100-110)K-5G

Models	100K	110K
Input DC		
Max. input voltage	1100 V	
Rated voltage	600 V	
Start-up voltage	195 V	
MPPT voltage range	180-1000 V	
Max. input current	10*26 A	
Max. short circuit current	10*40 A	
MPPT number/Max. input strings number	10/20	
Output AC		
Rated output power	100 kW	110 kW
Max. apparent output power	110 kVA	121 kVA
Max. output power	110 kW	121 kW
Rated grid voltage	3/N/PE, 220 V / 380 V, 230 V / 400 V	
Rated grid frequency	50 Hz / 60 Hz	
Rated grid output current	152.0 A / 144.3 A	167.1 A / 158.8 A
Max. output current	167.1 A	183.8 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)	
THDi	<3%	
Efficiency		
Max. efficiency	98.7%	
EU efficiency	98.3%	
Protection		
DC reverse-polarity protection	Yes	
Short circuit protection	Yes	
Output over current protection	Yes	
Surge protection	DC Type II / AC Type II (AC Type I optional)	
Grid monitoring	Yes	
Anti-islanding protection	Yes	
Temperature protection	Yes	
Strings monitoring	Yes	
I/V Curve scanning	Yes	
Integrated AFCI (DC arc-fault circuit protection)	Yes ⁽¹⁾	
Integrated PID recovery	Optional	
Integrated DC switch	Yes	
Integrated AC switch	Optional	
General Data		
Dimensions (W*H*D)	1065*567*344.5 mm	
Weight	91 kg	
Topology	Transformerless	
Self-consumption (night)	<2 W	
Operating ambient temperature range	-30 ~ +60°C	
Relative humidity	0-100%	
Ingress protection	IP66	
Cooling concept	Intelligent redundant fan-cooling	
Max. operation altitude	4000 m	
Grid connection standard	VDE-AR-N 4105, VDE-AR-N 4110, VDE V 0124, VDE V 0126-1-1, UTE C15-712-1, NRS 097-1-2, G98, G99, EN 50549-1/-2, RD 1699, TOR, UNE 206006, UNE 206007-1, CEI 0-21, IEC61727, DEWA	
Safety/EMC standard	IEC/EN 62109-1/-2, IEC/EN 61000-6-2/-4	
Features		
DC connection	MC4 connector	
AC connection	OT terminal (max. 185 mm ²)	
Display	LCD	
Communication	RS485, Optional: Wi-Fi, GPRS, PLC	

(1) Activation required.

S5-GC(100-110)K

Solis Three Phase Grid-Tied Inverters

Efficient

- 10 MPPTs, max. efficiency 98.7%
- > 150% DC/AC ratio
- High power tracking density 100MPPT/MW
- String current up to 16A, perfectly match large current bifacial modules

Smart

- Night SVG function
- Intelligent string monitoring, smart I-V curve scan
- Remote firmware upgrade with simple operation

Safe

- AFCI protection, proactively reduces fire risk
- Built-in PID recovery for better module performance (optional)
- Overvoltage load reduction and leakage current suppression technology, low failure rate
- Globally recognised branded componentry for longer life

Economic

- Power line communication (PLC) (optional)
- DC side supports "Y" connector

Models:

S5-GC100K

S5-GC110K



DATASHEET

S5-GC(100-110)K

Models	100K	110K
Input DC		
Max. input voltage	1100 V	
Rated voltage	600 V	
Start-up voltage	195 V	
MPPT voltage range	180-1000 V	
Max. input current	10*32 A	
Max. short circuit current	10*40 A	
MPPT number/Max. input strings number	10/20	
Output AC		
Rated output power	100 kW	110 kW
Max. apparent output power	110 kVA	121 kVA
Max. output power	110 kW	121 kW
Rated grid voltage	3/N/PE, 220 V / 380 V, 230 V / 400 V	
Rated grid frequency	50 Hz / 60 Hz	
Rated grid output current	152.0 A / 144.3 A	167.1 A / 158.8 A
Max. output current	167.1 A	183.8 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)	
THDi	<3%	
Efficiency		
Max. efficiency	98.7%	
EU efficiency	98.3%	
Protection		
DC reverse-polarity protection	Yes	
Short circuit protection	Yes	
Output over current protection	Yes	
Surge protection	DC Type II / AC Type II (AC Type I optional)	
Grid monitoring	Yes	
Anti-islanding protection	Yes	
Temperature protection	Yes	
Strings monitoring	Yes	
I/V Curve scanning	Yes	
Integrated AFCI (DC arc-fault circuit protection)	Yes ⁽¹⁾	
Integrated PID recovery	Optional	
Integrated DC switch	Yes	
Integrated AC switch	Optional	
General Data		
Dimensions (W*H*D)	1065*567*344.5 mm	
Weight	91 kg	
Topology	Transformerless	
Self-consumption (night)	<2 W	
Operating ambient temperature range	-30 ~ +60°C	
Relative humidity	0-100%	
Ingress protection	IP66	
Cooling concept	Intelligent redundant fan-cooling	
Max. operation altitude	4000 m	
Grid connection standard	VDE-AR-N 4105, VDE-AR-N 4110, VDE V 0124, VDE V 0126-1-1, UTE C15-712-1, NRS 097-1-2, G98, G99, EN 50549-1/-2, RD 1699, TOR, UNE 206006, UNE 206007-1, CEI 0-21, IEC61727, DEWA	
Safety/EMC standard	IEC/EN 62109-1/-2, IEC/EN 61000-6-1/-2/-3/-4	
Features		
DC connection	MC4 connector	
AC connection	OT terminal (max. 185 mm ²)	
Display	LCD	
Communication	RS485, Optional: Wi-Fi, GPRS, PLC	

(1) Activation required.

C&I Power Plant Case Study



Ninghai Power Plant

- China
- 38MW
- Solis-(215-255)K-EHV-5G

Ninghai Power Plant transitions away from traditional thermal power to integrate solar power generation overcoming technical challenges along the way.

Ninghai Power is dedicated to the innovation of greener power through science and technology and has become a leader in Agrisolar development. As a pioneer in its industry the company has implemented a new energy park project which includes fishery-solar system, Agrisolar and floating solar systems, solar carport and



solar corridor as well as a more traditional solar rooftop. Over 8 different installation types have enabled more green energy to be installed in more areas - true "out of the box" thinking.

The solar plant now generates more than 300 billion kilowatts of green energy.



- India
- 1.12MW
- S5-GC(80-110)K



- Greece
- 100kW
- S5-GC(100-110)K

- UK
- 2MW
- Solis-(100-110)K-5G



- Netherlands
- 168.35kW
- Solis-(80-110)K-5G



- Philippines
- 270kW
- Solis-(25-30)K-LV

Utility Scale Solar PV Solutions



Solis has optimized and innovated around the entire process of utility solar PV solutions. Deeply integrated system design, digital management, and IoT technology effectively optimize the initial investment and future O&M costs of the power station increasing the power generation of the system and the rate of return on investment. Through the concept of "Efficient, safe, reliable, smart O&M, and system-friendly" we maximise the value for customers.

The 1500V high-power system solution can effectively reduce the number of equipment and cable consumption, reduce the initial investment cost, and facilitate installation and maintenance. Solis utility PV solution has the characteristics of low LCOE. From the perspective of inverter performance improvement, it includes optimizing software algorithms and optimizing hardware port compatibility to improve system efficiency and reduce system investment costs. Solis utility inverter has a large single power, up to 255kW. The high-efficiency and high-power-density inverter can reduce the workload of installation and maintenance, reduce costs and improve efficiency. Solis utility PV solution is supplemented by a series of advanced digital services and intelligent monitoring equipment based on SolisCloud, simplifying the application difficulty of the intelligent system, and providing a more complete, high-quality and efficient cloud smart O&M solution.


Models:

Solis-(215-255)K-EHV-5G

Output:

215 kW - 255 kW

Utility Scale Solar PV Solution

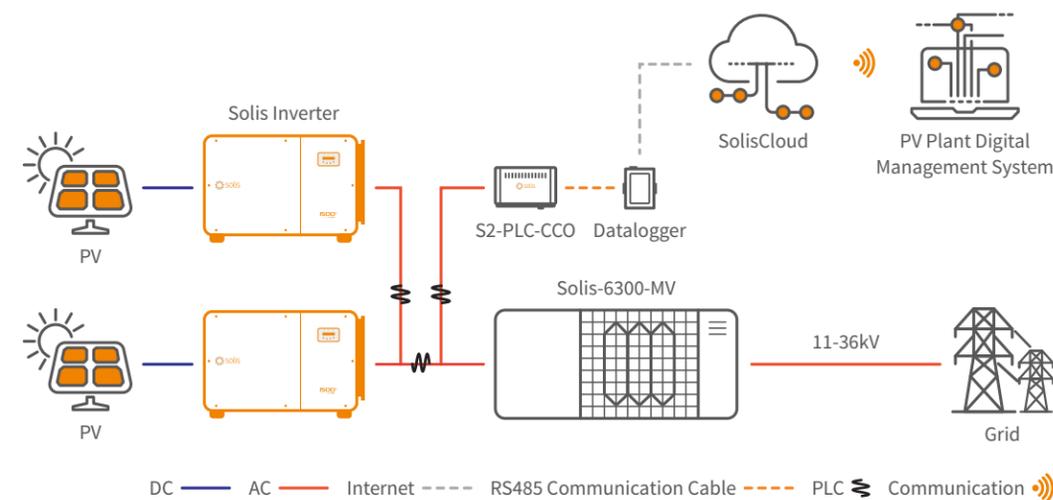

Solis-(215-255)K-EHV-5G

Solis Three Phase Grid-Tied Inverters

Efficient

- 9/12/14 MPPTs, max. efficiency 99.0%
- > 150% DC/AC ratio
- High power tracking density 55MPPT/MW
- Compatible with 500W+ bifacial modules

Smart

- Night SVG function
- Intelligent string monitoring, smart I-V curve scan
- Remote firmware upgrade with simple operation

Safe

- IP66
- Built-in PID recovery for better module performance
- Fuse free design, safe and maintenance free
- Globally recognised branded componentry for longer life

Economic

- Power line communication (PLC) (optional)
- DC side supports "Y" connector

Models:

Solis-215K-EHV-5G-PLUS

Solis-255K-EHV-5G

Solis-255K-EHV-5G-PLUS



360° View

DATASHEET

Solis-(215-255)K-EHV-5G

Models	215K-PLUS	255K	255K-PLUS
Input DC			
Max. input voltage	1500 V		
Rated voltage	1080 V		
Start-up voltage	500 V		
MPPT voltage range	480-1500 V		
Max. input current	9*30 A	14*26 A	12*30 A
Max. short circuit current	9*50 A	14*40 A	12*50 A
MPPT number/Max. input strings number	9/18	14/28	12/24
Output AC			
Output power	215 kVA@30°C / 205 kVA@40°C / 195 kVA@50°C	255 kVA@30°C / 235 kVA@40°C / 220 kVA@50°C	
Rated grid voltage	3/PE, 800 V		
Grid voltage range	640-920 V		
Rated grid frequency	50 Hz / 60 Hz		
Max. output current	155.2 A	184.0 A	
Power factor	>0.99 (0.8 leading - 0.8 lagging)		
THDi	<3%		
Efficiency			
Max. efficiency	99.0%		
EU efficiency	98.8%	98.7%	98.8%
Protection			
DC reverse-polarity protection	Yes		
Short circuit protection	Yes		
Output over current protection	Yes		
Surge protection	DC Type II / AC Type II		
Grid monitoring	Yes		
Anti-islanding protection	Yes		
Temperature protection	Yes		
Strings monitoring	Yes		
I/V Curve scanning	Yes		
Night time SVG function	Yes		
Integrated PID recovery	Yes		
Integrated DC switch	Yes		
General Data			
Dimensions (W*H*D)	1125*770*384 mm		
Weight	109 kg	113 kg	
Topology	Transformerless		
Self-consumption (night)	<2 W		
Operating ambient temperature range	-30 ~ +60°C		
Relative humidity	0-100%		
Ingress protection	IP66		
Cooling concept	Intelligent redundant fan-cooling		
Max. operation altitude	4000 m		
Grid connection standard	EN50549, G99, AS4777.2, VDE0126, IEC61727, VDE4110, CEA 2019		
Safety/EMC standard	IEC/EN 62109-1/-2, IEC/EN 61000-6-2/-4		
Features			
DC connection	MC4 connector		
AC connection	OT terminal (max. 300 mm ²)		
Display	LCD		
Communication	RS485, Optional: PLC		

Solis-6300-MV

Solis MV Station

For 1500 V string inverter Solis 255K

Integrated delivery

- Mainstream 6.3MW subarray, widely used globally
- 20 foot standard container delivery, easy to transport

Convenient installation

- A complete solution, from inverter to main step-up transformer
- When the container is lifted to the foundation, only LV and MV cables need to be connected

Reliable products


- LV panel, transformer and RMU to be placed independently
- Adopt international first-line brand equipment with reliable quality

Easy O&M

- Full frontal maintenance design
- Modular design of MV equipment, easy to replace



Circuit diagram

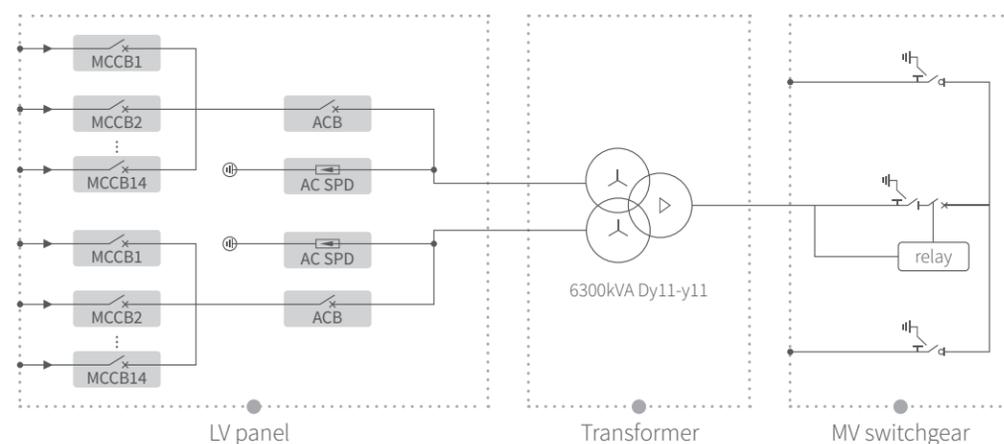

DATASHEET

Solis-6300-MV

Models	6300
LV panel	
MCCB specification	250 A / 800 Vac / 3P, 14*2 pcs
ACB specification	3200 A / 800 Vac / 3P, 1*2 pcs
Connection form with transformer	Copper busbar
Transformer	
Transformer type	Oil immersed
Rated output power	6300 kVA @ 40°C
Max. output power	6930 kVA @ 40°C 3h
LV/MV voltage	0.8 kV / 10-35 kV
Max. input current	2577 A *2
Tapping on HV	±2*2.5%
Vector group	Dy11y11
Frequency	50 Hz / 60 Hz
Cooling type	ONAN
Impedance	7%
Oil type	Mineral oil (Optional: plant oil)
Winding material	Al/Al (Optional: Cu/Cu)
Insulation class	A
Connection form with MV switchgear	Cable
MV Switchgear	
Type of insulate	SF6
Rated voltage	12-36 kV
Rated current	630 A
Internal arcing fault	20 kA / 1 s
Qty of feeder	3 feeders
Protection	
LV surge protection	AC type I+II
AC input protection	Circuit breaker
Transformer protection	Oil-temperature, oil-level, oil-pressure
Fire protection	Smoke detection, emergency lighting
General Data	
Dimensions (W*H*D)	6058*2896*2438 mm
Approximate weight	24 T
Operating ambient temperature range	-25 ~ +60°C
Max. operation altitude	1000 m (standard)
Auxiliary power supply	5 kVA / 230 V (Optional: max. 40 kVA)
UPS	1 kVA 30 min (Optional: max. 2 kVA 2h)
Degree of protection	IP54
Allowable relative humidity range	0-95%
Communication	RS485, Ethernet, Optical fiber
Compliance	IEC 60076, IEC 62271, IEC61439

Utility-scale Plant Case Study



📍 Mexico
⚡ 20MW 📦 Solis-20K-HV



📍 Poland
⚡ 10MW 📦 Solis-125K-EHV-5G



📍 China
⚡ 1GW 📦 Solis-(215-255)K-EHV-5G



📍 India
⚡ 2MW 📦 Solis-(100-110)K



📍 China
⚡ 300MW 📦 Solis-(215-255)K-EHV-5G

Tidal-Flat 300MW Utility Scale Solar PV Plant

After the project is put into operation, the generating capacity is estimated to be 400,000,000 kWh/ year and delivers a reduction of 350, 000 tons of CO₂, 12,000 tons of SO₂, and 110,000 tons of Carbon dust. Solis commercial scale string inverters boast an abundance of technological features which can adapt to a variety of environments. We look forward to seeing more applications utilizing Solis inverters. We are committed to our mission - Developing Technology to Power the World with Clean Energy.


Export Power Management Solutions



In some countries, local regulations limit the amount of PV power that can be exported to the grid or allow no export. Solis offers two export limitation solutions for single and multiple inverters system.


Export Power Management Solutions - Single-inverter System

In a single-inverter system, the export limitation is integrated into the inverter firmware. Use a meter or a CT to measure the output of the system, then to adjust PV power production.

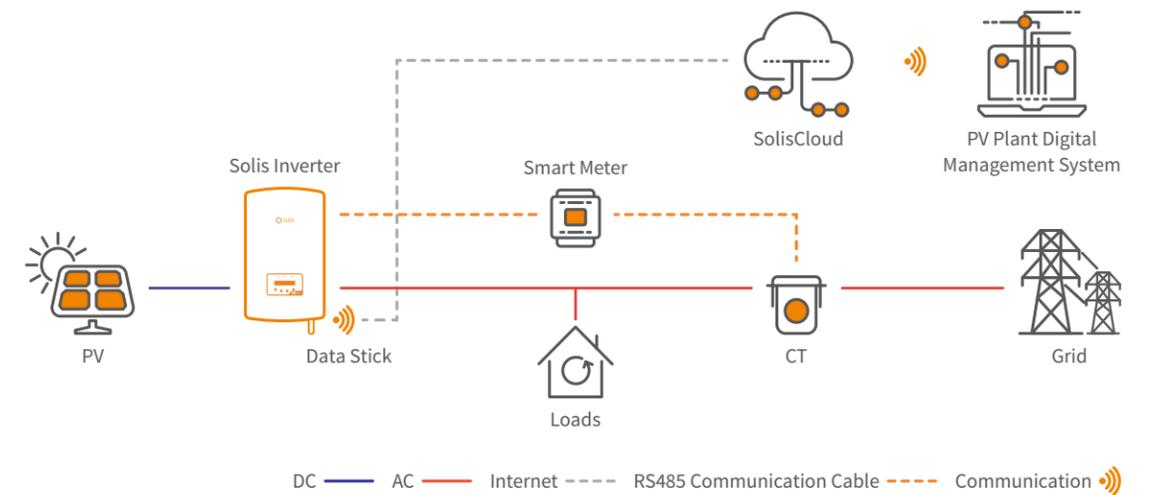

Export Power Management Solution - Multi-inverter System

In a multi-inverter system, the export limitation is integrated into the EPM (Export Power Manager) firmware. The EPM will monitor and control the backflow power from the inverter to the grid thus providing export power control of inverters.

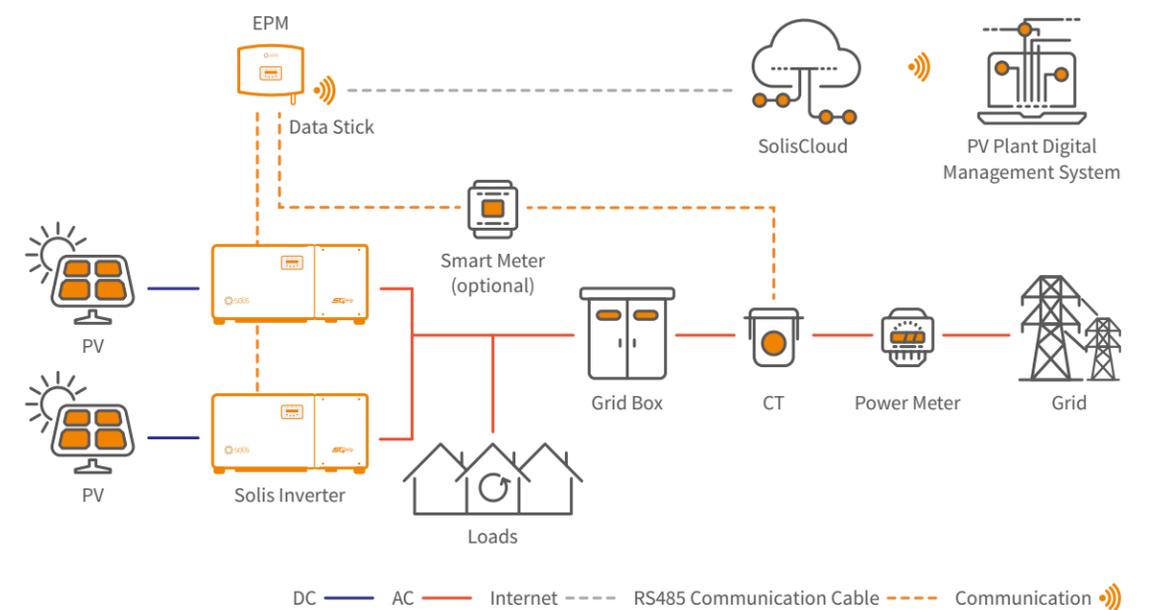

Solis-EPM-5G

Solis Export Power Manager

Smart & strong

- Simultaneous control of 20 X Solis inverters
- Realizing reactive compensation of the system

Saving & high precision

- Simultaneously monitor the operating data of the 20 X Solis inverter, saving the cost of the monitoring system
- The control accuracy is up to 1%, which improves the system's spontaneous use rate

Friendly & compatible

- Supports simultaneous access of Solis inverters with different powers
- Monitor power generation and load consumption at all times

Models:

Solis-EPM1-5G

Solis-EPM3-5G-PLUS

Solis-EPM3-5G-PRO



DATASHEET

Solis-EPM-5G

Models	Solis-EPM1-5G	Solis-EPM3-5G-PLUS	Solis-EPM3-5G-PRO				
Input AC							
Rated voltage	1/N/PE, 230 V	3/N/PE, 400 V (175 ~ 519 V)	1/N/PE, 230 V; 3/(N)/PE, 400 V				
Input voltage range	100 ~ 300 V (L-N)	175~ 456 V (L-L)	100 ~ 300 V (L-N); 175 ~ 519 V (L-L)				
Input frequency range	45~65 Hz						
Communication							
Inverter communication	Modbus						
Communication with inverter	RS485 (Wired)						
Max. communication inverter numbers	20	10 (Recommended)	20 (Recommended)				
Monitoring	WiFi/4G/LAN Stick (Optional)	WiFi	WiFi/4G/LAN Stick (Optional)				
General Data							
Operating ambient temperature range	-25 ~ +60°C						
Relative humidity	5%~95%						
Max. operation altitude	2000 m						
Ingress protection	IP65						
Pollution degree	PD2 (Inside), PD3 (Outside)						
Overvoltage category	III						
Self-consumption	<6 W	<15 W	<6 W				
Dimensions (W*H*D)	364*276*114 mm	488*446*149 mm	364*276*114 mm				
Weight	2.1 kg (without CT, Meter)	5.4 kg (without CT)	2.1 kg (without CT, Meter)				
AC connection	Quick connection terminal						
Display	LCD						
Smart meter	No	Three phase: DTSD1352-C	Single phase: ACR10R-D16TE Three phase: DTSD1352-C				
CT connection	Plug terminal						
Power control accuracy	1%Pn						
Features							
Failsafe function	Yes						
Remote upgrade	Yes						
Control time	5 s						
CT specification							
	Specification	Dimensions (mm)			Hole size (mm)		Ratio
		W	H	D	a	e	
	CT-60×40-300 A	114	140	36	42	62	300:5 A
	CT-80×40-600 A	122	162	40	42	82	600:5 A
	CT-80×40-1000 A	122	162	40	42	82	1000:5 A
	CT-160×80-2000 A	184	254	52	82	162	2000:5 A
CT-160×80-3000 A	184	254	52	82	162	3000:5 A	

SolisCloud: Intelligent Solar Energy System Monitoring

The SolisCloud intelligent monitoring system includes hardware and software products and is a comprehensive energy management solution. Hardware products, including data stick, data box, EPM and PLC, etc; transmit to SolisCloud online energy management platform. Real-time monitoring, visualized management and remote O & M of residential, C&I and utility scale solar PV plants.



S2-WL-ST

S3-GPRS/WiFi-ST



S2-WL-ST (4 Pin) S2-WL-ST (USB)



S3-GPRS-ST S3-WiFi-ST

S1-W4G-ST

S4-WiFi-ST



S1-W4G-ST (4 Pin) S1-W4G-ST (USB)



S4-WiFi-ST

Solis-Link: RF

S3-Logger



RF-Stick RF Gateway




S3-Logger

SolisCloud

New generation Solis PV monitoring platform

SolisCloud is the new generation of intelligent PV system monitoring. This new monitoring platform will empower you like never before. You will have full control of your system whenever and wherever you are. You will benefit from upgraded accurate fault alarm messaging that is adjustable to notify you within hours that fit meet your needs.

For simple O&M the new platform features a full size display of all your installations with real-time data. You will have an intelligent alarm system that gives recommendations to quickly repair your field faults. In depth analysis tools allow you to understand the overall health of your system. IV curve scanning can be done easily and quickly on your whole system. A live power flow display gives visibility of both standard solar systems as well as storage systems. Most importantly you will have complete control of your systems and be able to monitor and adapt anything when and how you want.

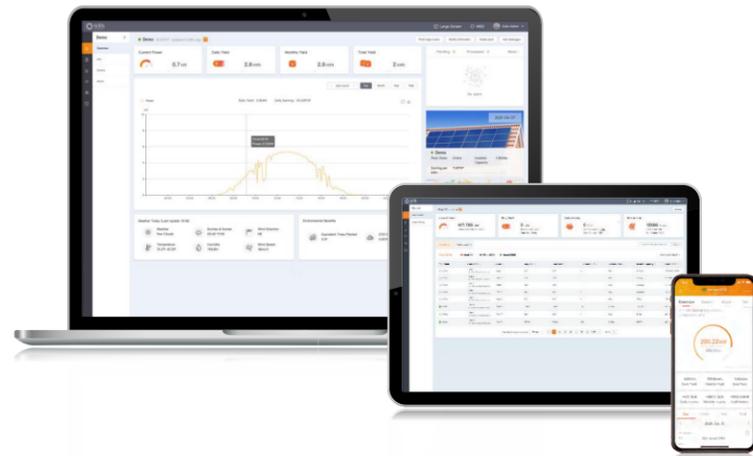

Advanced Cloud Platform

- Connecting with multiple types of devices seamlessly: Inverters, export power managers, weather stations, etc.

Efficient O & M

- Smart I-V curve scan, system health report, string-level fault finding


Multiple Plant Management

- Manage multiple types of systems across residential, commercial and utility scale plants. Enables multiple team management across different sectors

Full Screen Display Mode

- Clear and concise display of system performance and benefits including carbon emissions saved and equivalent trees planted as well as showing system yield & earnings

Intelligent Monitoring Solution - SolisCloud

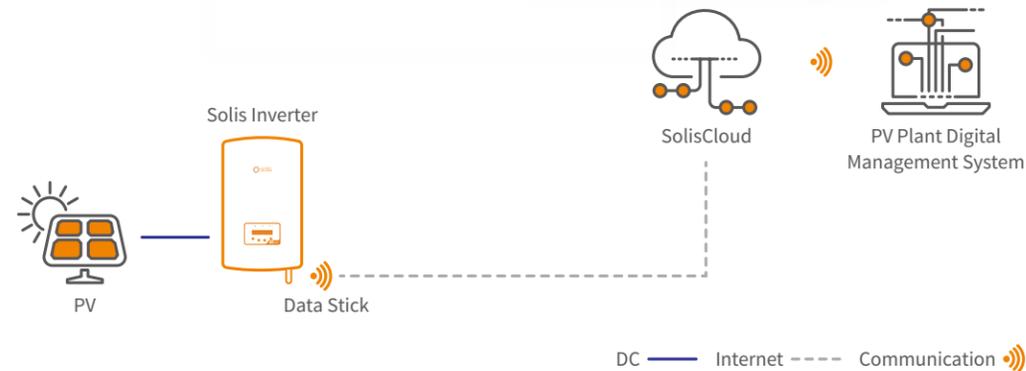

Download the App



FOLLOW US

The Full Series of Operation Videos Will be available on **Youtube**

Accessories available:

- | | |
|-----------------|----------------|
| S2-WL-ST | S4-WiFi-ST |
| S3-GPRS/WiFi-ST | Solis-Link: RF |
| S1-W4G-ST | S3-Logger |

S2-WL-ST

Solis Data Loggers

Use RS485 communication method to connect the inverters, up to 10 inverters can be connected at the same time. Data communication with the monitoring system through wireless WiFi network or LAN, which can realize remote control and monitoring. The network transmits intuitive data, which is convenient for customers to monitor anytime and anywhere.

Features:

- Support WiFi and LAN communication
- Status indicator, easy to display working status
- RESET button, one key to send data, convenient debugging
- Plug and play, quick installation
- Fault alarm, real-time monitoring
- Support Bluetooth nearby connection and debugging
- One-key assignment of inverter address, efficient and labor-saving




S2-WL-ST (4 Pin)



S2-WL-ST (USB)

Intelligent Monitoring Solution - S2-WL-ST

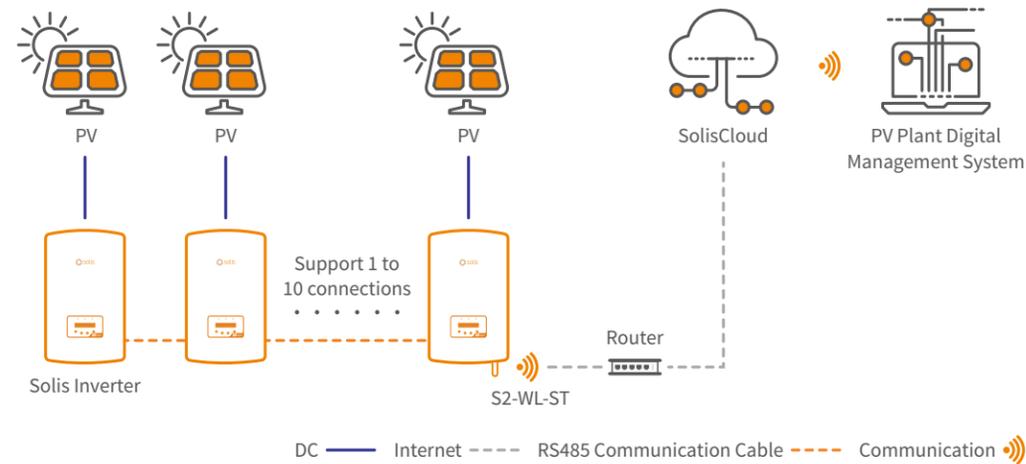

DATASHEET

S2-WL-ST

Models	S2-WL-ST (4 Pin)	S2-WL-ST (USB)
Communication		
Supported device type	Solis inverter	
Number of connected inverters ⁽¹⁾	≤10	
Data collection intervals	5 minutes	
Status indicator	LED × 3	
Communication interface	4 Pin	USB
Wireless communication	802.11b/g/n (2.4G—2.483G)	
Configuration method	APP/WEB	
Electrical		
Operating voltage	DC 5 V (+/-5%)	
Operating power consumption	≤5 W	
Environment		
Operating ambient temperature range	-30 ~ +65°C	
Operating humidity	5%-95%, relative humidity, non-condensing	
Storage temperature	-40 ~ +70°C	
Storage humidity	< 40%	
Max. operation altitude	4000 m	
Protection degree	IP65	
Mechanical		
Dimensions (L*W*H)	125*34*49 mm	112*34*49 mm
Installation method	Insert+Screw	Insert+Lock
Weight	103 g	89 g
Others		
Certification	CE, FCC	

(1) Connect the inverters by RS485 cables.

S3-GPRS/WiFi-ST

Solis Data Loggers


Use RS485 communication method to connect the inverter, and data connection through wireless WiFi network or GPRS, which can realize remote control and monitoring. The network transmits intuitive data, which is convenient for customers to monitor at any time and place.

Features:

- Fault alarm, real-time monitoring
- Status indicator, easy to display working status
- Plug and play, convenient and fast
- RESET button, one key to send data, convenient debugging



Intelligent Monitoring Solution - S3-GPRS/WiFi-ST

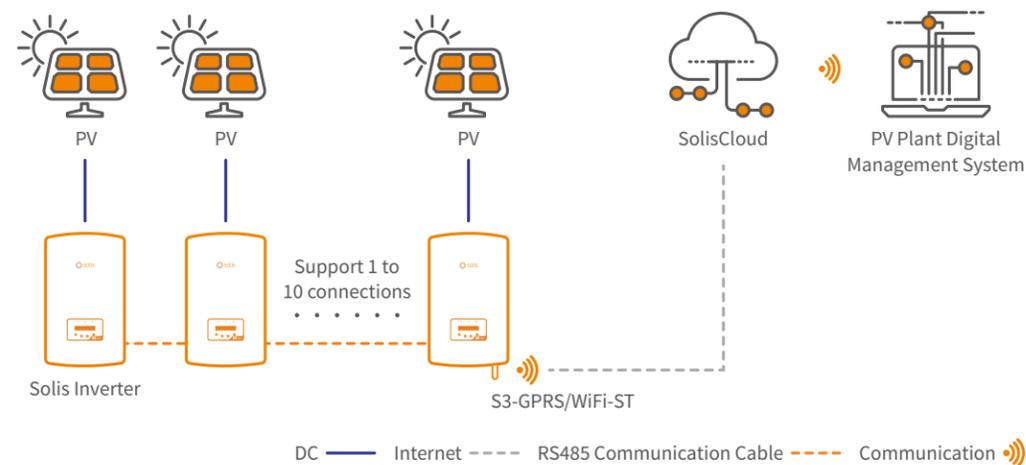

DATASHEET

S3-GPRS/WiFi-ST

Models	S3-GPRS-ST	S3-WiFi-ST
Communication		
Supported device type	Solis inverter	
Number of connected inverters ⁽¹⁾	≤10	
Data collection intervals	5 minutes	
Status indicator	LED × 3	
Communication interface	4 Pin	
Wireless communication	850/900/1800/1900 MHz	802.11b/g/n (2.4G—2.483G)
Configuration method	APP/WEB	
Electrical		
Operating voltage	DC 5V(+/-5%)	
Operating power consumption	≤5 W	
Environment		
Operating ambient temperature range	-30 ~ +65°C	
Operating humidity	5%-95%, relative humidity, non-condensing	
Storage temperature	-40 ~ +70°C	
Storage humidity	< 40%	
Max. operation altitude	4000 m	
Protection degree	IP65	
Mechanical		
Dimensions (L*W*H)	133*45*41 mm	128*50*34 mm
Installation method	Insert+Screw	
Weight	84 g	80 g
Others		
Certification	CE	CE, FCC

(1) Connect the inverters by RS485 cables.

S1-W4G-ST

Solis Data Loggers

Use RS485 communication method to connect the inverters, up to 10 inverters can be connected at the same time. Data communication with the monitoring system through wireless WiFi network or 4G, which can realize remote control and monitoring. The network transmits intuitive data, which is convenient for customers to monitor anytime and anywhere.

Features:

- Support WiFi and 4G communication
- Status indicator, easy to display working status
- RESET button, one key to send data, convenient debugging
- Fault alarm, real-time monitoring
- Support Bluetooth nearby connection and debugging
- One-key assignment of inverter address, efficient and labor-saving




S1-W4G-ST (4 Pin)



S1-W4G-ST (USB)

Intelligent Monitoring Solution - S1-W4G-ST

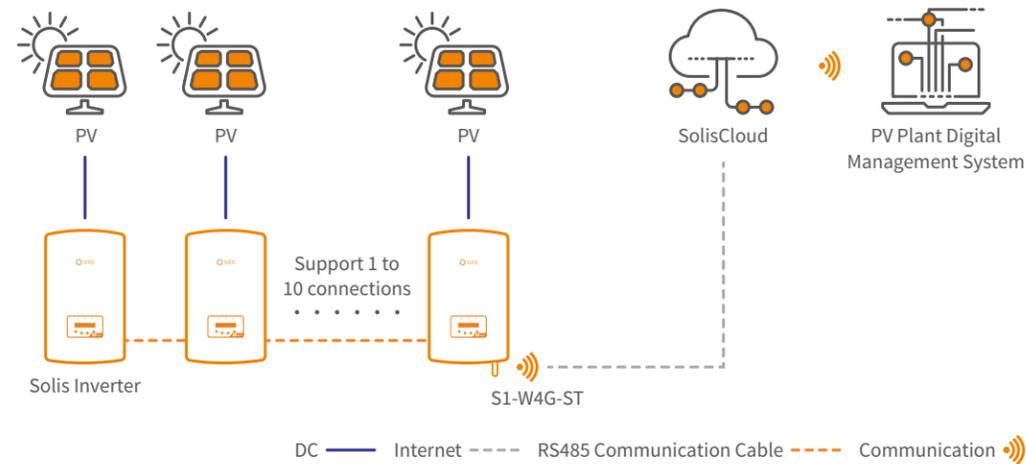

DATASHEET

S1-W4G-ST

Models	S1-W4G-ST (4 Pin)	S1-W4G-ST (USB)
Communication		
Supported device type	Solis inverter	
Number of connected inverters ⁽¹⁾	≤10	
Data collection intervals	5 minutes	
Status indicator	LED × 3	
Communication interface	4 Pin	USB
Wireless communication	802.11b/g/n (2.4G—2.483G) GSM/GPRS: 850/900/1800/1900 MHz	
Configuration method	APP/WEB	
Electrical		
Operating voltage	DC 5 V (+/-5%)	
Operating power consumption	≤5 W	
Environment		
Operating ambient temperature range	-30 ~ +65°C	
Operating humidity	5%-95%, relative humidity, non-condensing	
Storage temperature	-40 ~ +70°C	
Storage humidity	< 40%	
Max. operation altitude	4000 m	
Protection degree	IP65	
Mechanical		
Dimensions (L*W*H)	128*50*34 mm	115*50*34 mm
Installation method	Insert+Screw	Insert+Lock
Weight	79 g	65 g
Others		
Certification	CE, FCC	

(1) Connect the inverters by RS485 cables.

S4-WiFi-ST

Solis Data Loggers

Use RS485 communication method to connect the inverters, up to 10 inverters can be connected at the same time. Data communication with the monitoring system through wireless WiFi network, which can realize remote control and monitoring. The network transmits intuitive data, which is convenient for customers to monitor anytime and anywhere.


Features:

- Fault alarm, real-time monitoring
- Plug and play, convenient and fast
- Status indicator, easy to display working status
- RESET button, one key to send data, convenient debugging



S4-WiFi-ST

Intelligent Monitoring Solution - S4-WiFi-ST

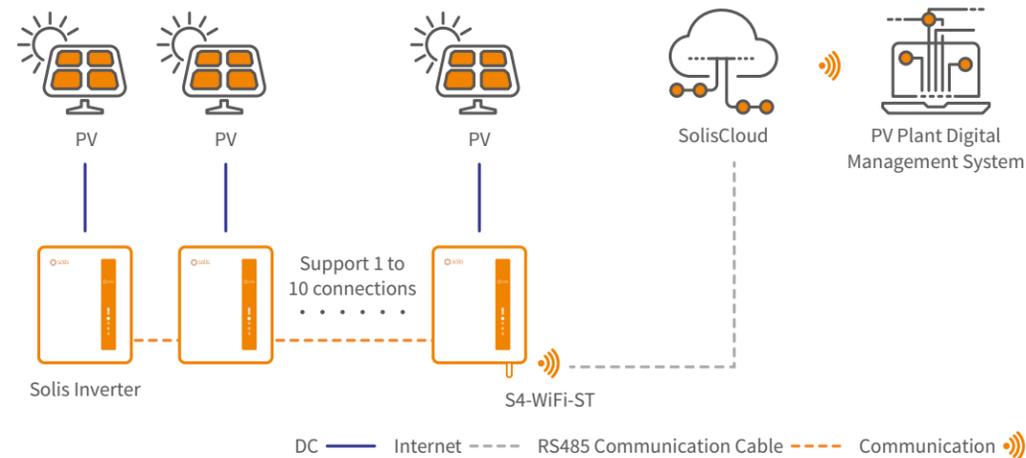

DATASHEET

S4-WiFi-ST

Models	S4-WiFi-ST
Communication	
Supported device type	Solis inverter
Number of connected inverters ⁽¹⁾	≤10
Data collection intervals	5 minutes
Status indicator	LED × 3
Communication interface	USB
Wireless communication	802.11b/g/n (2.4G—2.483G)
Configuration method	APP/WEB
Electrical	
Operating voltage	DC 5V(+/-5%)
Operating power consumption	≤5 W
Environment	
Operating ambient temperature range	-30 ~ +65°C
Operating humidity	5%-95%, relative humidity, non-condensing
Storage temperature	-40 ~ +70°C
Storage humidity	< 40%
Max. operation altitude	4000 m
Protection degree	IP65
Mechanical	
Dimensions (L*W*H)	128*50*34 mm
Installation method	Insert+Screw
Weight	84 g
Others	
Certification	CE, FCC

(1) Connect the inverters by RS485 cables.

Solis-Link: RF

Solis Data Loggers

Solis box type (gateway) + stick type (terminal) monitoring data collector, the terminal uses RS485 communication to connect to the inverter, the gateway uses wired Ethernet to connect to the home router, and the gateway and terminal are connected through RF data to realize automatic networking. The equipment is connected to the gateway automatically, free of wiring and wireless network configuration; it aims to realize a stable and intelligent operation and maintenance management plan for users.

Features:

- Plug and play, easy to operate
- No Wi-Fi configuration required, RF intelligent connection
- Stable network connection, real-time data transmission
- Remote monitoring, allowing real-time monitoring of mobile APP and Web




RF-Stick



RF Gateway

Intelligent Monitoring Solution - Link: RF

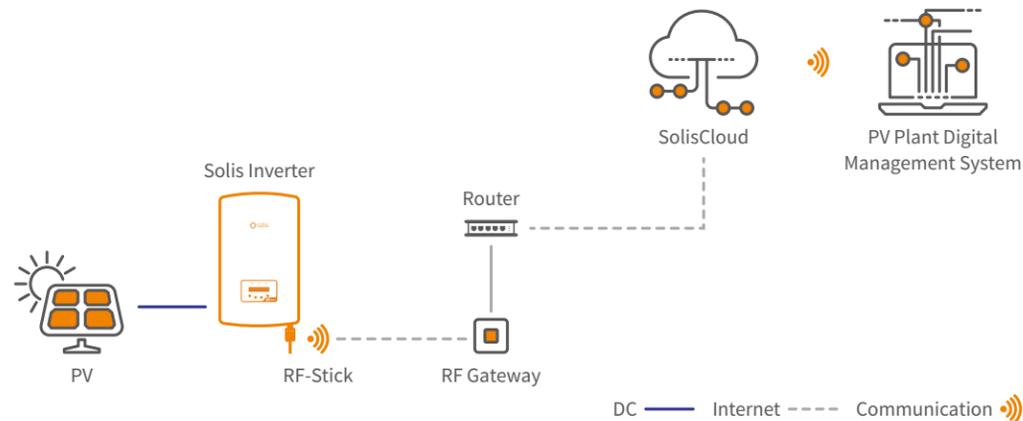

DATASHEET

Solis-Link: RF

Models	RF-Stick	RF-Gateway
Wireless parameters		
Demodulation		FSK
Data rate		9.6 kbps
Transmitting power		+20 dBm
Transmitting frequency offset		20 kHz
Transmission channel bandwidth		<8 kHz
Receiving channel bandwidth		200 kHz
Hardware parameters		
Data interface	RS 485	Adaptive 10 / 100 Mbps
Operating voltage	DC 5 V ~ DC 12 V	DC 5.0 V (+/-5%)
Max. working voltage	15 V	12 V
Operating power consumption	1.5 W	
Indicator light	System running Status--RUN Light Inverter Connection Status--COM Light RF Connection Status--RF Light	System running Status--RUN Server Connection Status--SER RF Connection Status--RF
Operating humidity	10%-90%, relative humidity, non-condensing	
Storage temperature	-45 ~ +90°C	
Storage humidity	< 40%	
Software parameters		
Number of connected inverters	1	/
Serial communication rate	9600 bps (adjustable:1200-57600 bps)	/
Data collection intervals	5 minutes	/
Link requirement	/	CAT5 shielded network cable length <50 m
Mechanical		
Dimensions (L*W*H)	47*41*160 mm	90*23*90 mm
Weight	130 g	80 g
Protection degree	IP 65	IP 21
Others		
Certification	CE	

S3-Logger

Solis Data Loggers

S3-Logger is a data acquisition and protocol conversion device applied to PV equipment in PV power plants, which can support access of meters, weather stations and other equipment.


Features:

- Support data connection to local monitoring system
- Support electricity meters, weather stations and other equipment access
- Intelligent IV curve scan
- Support a variety of communication protocols
- Inverter remote upgrade
- One-key address allocation and EPM function



S3-Logger

Intelligent Monitoring Solution - S3-Logger

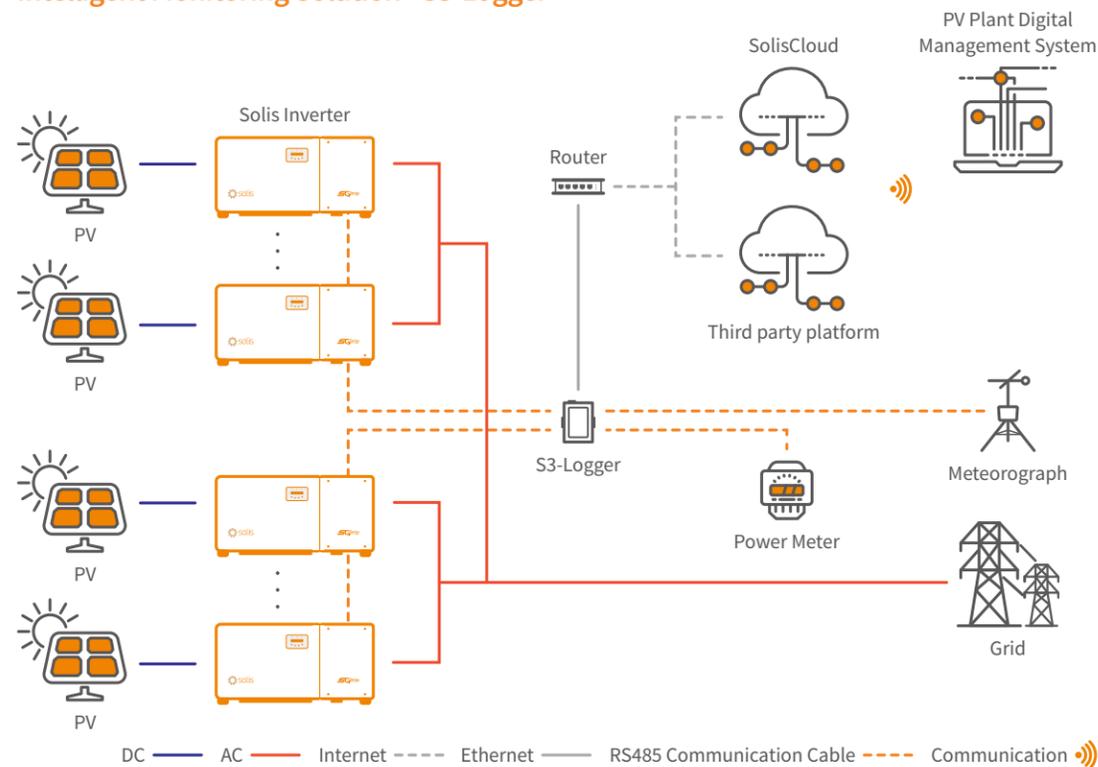

DATASHEET

S3-Logger

Models	S3-Logger
Communication	
Supported device type	Solis inverter
Number of connected inverters ⁽¹⁾	Each RS485 PORT≤15
Data collection intervals	5 minutes
Status indicator	LED × 2, Power, Run
RS485	COM × 4, 1200~19200 bps, communication distance ≤1000 m
Ethernet communication	LAN × 1, 10/100Mbps adaptive, communication distance ≤100 m
Communication Protocol	
RS485	Modbus-RTU, IEC60870-5-103, DLT645
Ethernet	Modbus-TCP, IEC60870-5-104
Electrical	
AC power supply	100~240 V, 50 Hz / 60 Hz
DC power supply	9~36 V
Operating power consumption	5 W@12VDC
Environment	
Operating ambient temperature range	-40 ~ +80°C
Operating humidity	≤85%, relative humidity, non-condensing
Storage temperature	-40 ~ +80°C
Max. operation altitude	4000 m
Mechanical	
Dimensions (L*W*H)	89*121*27 mm
Protection degree	IP20
Installation method	Rail Mounting, Desktop installation
Others	
Certification	CE, RoHS

(1) Connect the inverters by RS485 cables.

Contact Us

HQ

- ☎ +86 574 6580 2188
- ✉ sales@ginlong.com service@ginlong.com
- 📍 188 Jinkai Road, Binhai Industrial Park, Xiangshan, Ningbo, Zhejiang, 315712, China

UK

- ☎ +44 113 328 0870 (sales) +44 1514 536515 (service)
- ✉ europesales@solisinverters.com euservice@solisinverters.com
- 📍 1 Church Street Bootle Liverpool, L20 1AF, UK

Mexico

- ☎ +86 574 6580 2188 (sales) +52 81 3434 2092 (service, WhatsApp only)
- ✉ sales@ginlong.com service.latam@solisinverters.com
- 📍 Monterrey, Mexico

South Africa

- ☎ +27 010 222 0181
- ✉ sales@ginlong.com saservice@solisinverters.com
- 📍 1487 Seilskip Road, Laser Park, Honeydew, Roodepoort, Gauteng, South Africa

Poland

- ☎ +44 113 328 0870 (sales) +48 221 031 937 (service)
- ✉ europesales@solisinverters.com plservice@solisinverters.com

Spain (EU Service Center)

- ☎ +34 914 430 810 (sales) +34 919 495 286 (service Spain)
- ✉ europesales@solisinverters.com spservice@solisinverters.com (Spain)
euservice@solisinverters.com (EU)
- 📍 Calle de Serrano, 240 - 1ª planta 28016 Madrid, Spain

Korea

- ☎ +82 32 822 2188 (sales) +82 10 7924 2198 (service)
- ✉ krsales@solisinverters.com (sales & service)
- 📍 #A-615, Smart Valley, 30 Songdomirae-ro, yeonsu-gu, Incheon, Korea

Australia

- ☎ +61 3 8555 9516
- ✉ sales@solisinverters.com.au service@solisinverters.com.au
- 📍 No. 5 / 109 Tulip Street, Cheltenham, Vic. 3192 Australia

Vietnam

- ☎ +84 98 316 8126 (sales) +84 28 888 2099768 (service)
- ✉ sales@ginlong.com service@ginlong.com
- 📍 38/21 Đ. Lố Ổ, Xã Bình Thắng, Dĩ An, Bình Dương, Việt Nam

India

- ☎ +91 224 9744 251 (sales) +91 224 9744 021 (service)
- ✉ indiasales@ginlong.com inservice@solisinverters.com
- 📍 104, wing -A, 1st floor, Techno1 City Premises Plot no. X-4/1 Mahape Navi Mumbai- 400710, India

USA/ Canada

- ☎ +1 866 438 8408
- ✉ ussales@solisinverters.com usservice@solisinverters.com

Benelux (Belgium, Netherlands, Luxembourg)

- ☎ +31 85 048 1300
- ✉ benelux@solisinverters.com beservice@solisinverters.com (Belgium)
nlservice@solisinverters.com (Netherlands)
- 📍 Nokweg 3-B, 2451 AL Leimuiden, Nederland

Chile

- ☎ +86 574 6580 2188 (sales)
+52 811 500 2841 (service) +52 33 1751 0488 (service)
- ✉ sales@ginlong.com service@ginlong.com

Brazil

- ☎ +55 19 996133803 (sales) +55 19 999618000 (service, WhatsApp)
- ✉ sales@ginlong.com service@ginlong.com
- 📍 Rua James Clerk Maxwell, nº 280, Unidade 07, Empresa Solis, Bairro Parque Tecnológico Techno Park, Condomínio Empresarial Aztech, Campinas, SP, CEP 13.069-380

Myanmar

- ☎ +95 94 302 3335 (service)
- ✉ sales@ginlong.com service@ginlong.com
- 📍 No (10) Sagwar Pin Street, Kyimyindaing, Yangon City

Sweden

- ☎ +46 725 344 987 (sales) +46 850 282 408 (service)
- ✉ europesales@solisinverters.com seservice@solisinverters.com
- 📍 Åkersberga, Sweden

Ireland

- ☎ +353 1592 0312 (service)
- ✉ sales@ginlong.com euservice@solisinverters.com

Malaysia

- ☎ +60 016 232 3512 (service)
- ✉ sales@ginlong.com service@ginlong.com
- 📍 Jalan Kelang Lama, 58200 Kuala Lumpur, Malaysia

Romania

- ☎ +40 373 808 894 (service)
- ✉ europesales@solisinverters.com euservice@solisinverters.com
- 📍 Brasov, Romania

Singapore

- ☎ +60 016 232 3512 (service)
- ✉ sales@ginlong.com service@ginlong.com

Philippines

- ☎ +86 574 6580 2188 (sales)
+63 2 8372 7945 (service)
- ✉ sales@ginlong.com phservice@solisinverters.com
- 📍 40 Nadurata St. Zone 5 Brgy. 53 Grace Park West, Caloocan City, Metro Manila, Philippines

Germany

- ☎ +49 151 25 222 228 (sales) +49 322 12 249 144 (service)
- ✉ europesales@solisinverters.com deservice@solisinverters.com
deservice@solisinverters.com

Turkey

- ☎ +90 545 651 3541
- ✉ europesales@solisinverters.com euservice@solisinverters.com
- 📍 Istanbul, Turkey

Italy

- ☎ +39 02 8295 7352
- ✉ europesales@solisinverters.com itservice@solisinverters.com

Thailand

- ☎ +66 099 050 5595 (service)
- ✉ sales@ginlong.com service@ginlong.com
- 📍 Vibhavadi Rangsit Road, Chatucha, Bangkok 10900, Thailand

Indonesia

- ☎ +62 0813 8591 8539 (service)
- ✉ sales@ginlong.com service@ginlong.com
- 📍 Kunciran Pinang, Tangerang, Indonesia

France

- ☎ +34 914 430 810 (sales) +33 971 078 736 (service)
- ✉ europesales@solisinverters.com euservice@solisinverters.com

