

Zip HydroTap®

POWERED BY
G5
TECHNOLOGY



Boiling | **Chilled** | **Sparkling** | **Filtered** | **Instantly**

Powered by new G5 technology

The world's most advanced drinking water appliance



Experience water at its best



Installation Requirements

Power Supply	1 x 10 Amp socket outlet ; 2 x 10 Amp socket outlet for the models rated at 240 cups of boiling water per hour
Water Pressure	Min 250kPa - Max 700kPa
Water Connection	1/2" BSP (G1/2) with isolation valve


1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.
2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1.5 metres of the product.
3. HydroTap is air-cooled so discrete cabinetry cut-outs are required for ventilation.
4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.
5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.

Installation Detail

Method A & B




Ventilation Setting at the Cabinetry for Models: BC40, BC60, BC100, BCS60, BCS100.

(A) 廚櫃內座板有級咀 通風散熱做法

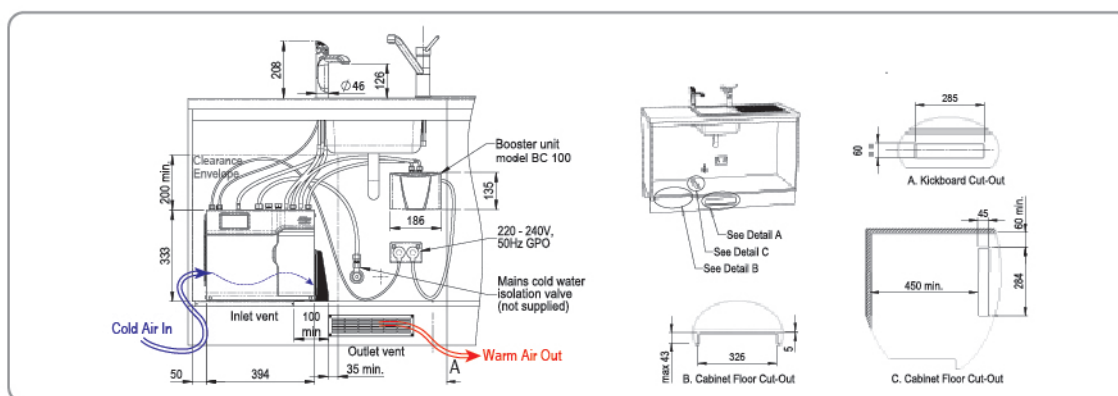

(B) 廚櫃內Zip提供散熱盤的做法

Ventilation requirements Contact your local service provider if ventilation is not suitable

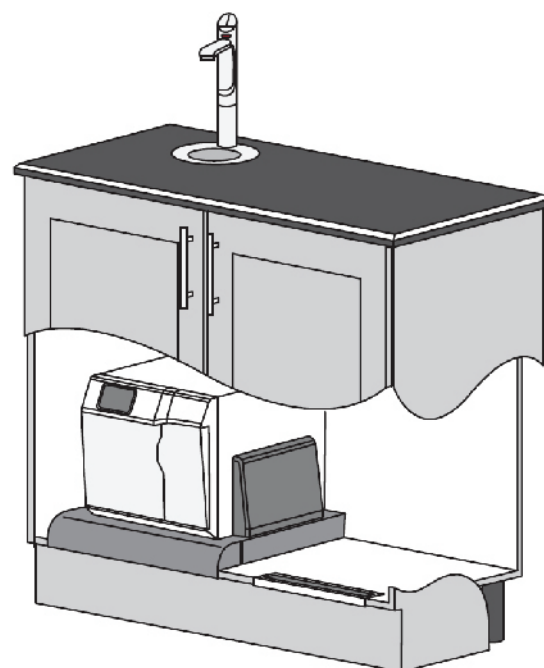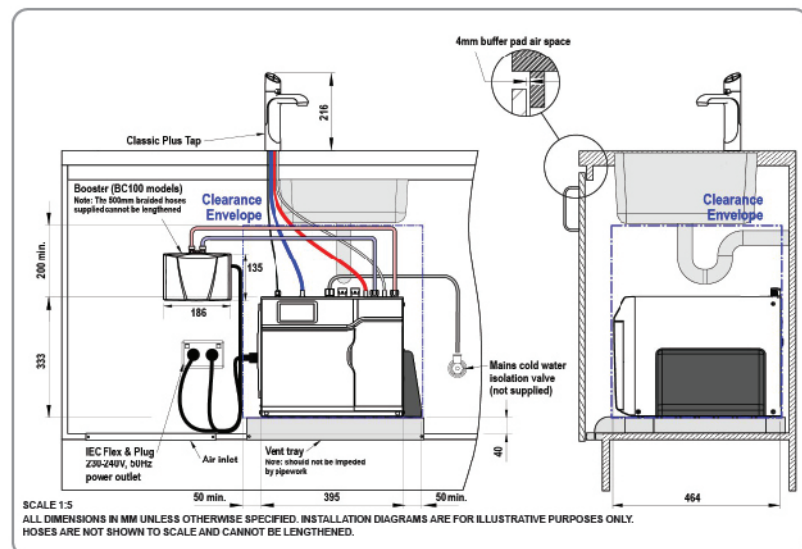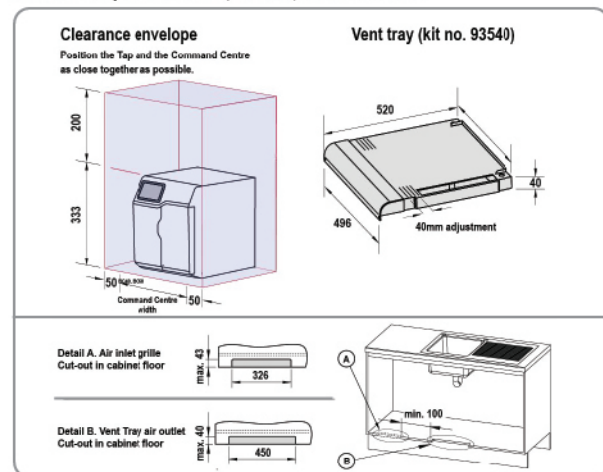

As Zip policy is one of continuous product improvement changes to specifications may be made without prior notice. The terms 'Zip', 'Power-Pulse', 'HydroTap' and 'Command Centre' are trade marks.



Order Code	Model No.	Boiling Cups in one hour	Chilled Glasses in one hour	Power Rating kW	Required Space (mm)** W x D x H
------------	-----------	--------------------------	-----------------------------	-----------------	------------------------------------

Zip HydroTap G5 for the workplace under bench top with Classic Chrome Tap

Boiling and Chilled filtered water (滾水 + 冰水機)

H51702Z00AU	G5 BC20	100	75	1.9	380 x 480 x 600
H51703Z00AU	G5 BC40	160	125	1.97	540 x 480 x 600
H51704Z00AU	G5 BC60	160	175	2.1	540 x 480 x 600
H51705Z00AU	G5 BC100	240	175	2.1 + 2.2*	540 x 480 x 600

Boiling filtered water (淨滾水機)

H51706Z00AU	G5 B60	160	–	1.8	380 x 350 x 600
H51707Z00AU	G5 B100	240	–	1.8 + 2.2*	380 x 350 x 600

Boiling and Ambient filtered water (滾水 + 室溫水機)

H51708Z00AU	G5 BA60	160	–	1.8	380 x 350 x 600
H51709Z00AU	G5 BA100	240	–	1.8 + 2.2*	380 x 350 x 600

Boiling, Chilled and Sparkling filtered water (滾水 + 冰水 + 有氣水機)

H51760Z00AU	G5 BCS20	100	75	1.96	540 x 480 x 600
H51762Z00AU	G5 BCS60	160	175	2.15	540 x 480 x 600
H51763Z00AU	G5 BCS100	240	175	2.15 + 2.2*	540 x 480 x 600

Chilled and Sparkling filtered water (冰水 + 有氣水機)

H51765Z00AU	G5 CS100	–	175	0.37	430 x 490 x 600
-------------	----------	---	-----	------	-----------------

Order Code	Model No.	Boiling Cups in one hour	Chilled Glasses in one hour	Power Rating kW	Required Space (mm)** W x D x H
------------	-----------	--------------------------	-----------------------------	-----------------	------------------------------------

Zip HydroTap G5 for the home under bench top with Classic Plus Chrome Tap

H55783Z00AU	G5 BCS Home	Boiling 🍷 + Chilled ❄️ + Sparkling 🍹	1.53	540 x 470 x 600
H55784Z00AU	G5 BC Home	Boiling 🍷 + Chilled ❄️	1.44	380 x 470 x 600
H55785Z00AU	G5 BA Home	Boiling 🍷 + Ambient 💧	1.35	380 x 350 x 600
H55786Z00AU	G5 B Home	Boiling 🍷	1.35	380 x 350 x 600
H55787Z00AU	G5 CS Home	Chilled ❄️ + Sparkling 🍹	0.18	430 x 460 x 600

Standard Cup = 167mL Standard Glass = 200mL

**The dimensions inclusive of airduct, the clearances 100mm (left, right) & 200mm on the top for all models.

*All models rated at 240 cups of boiling water per hour are installed with an externally mounted 2.2kW booster unit and must be connected to two separate 10 amp power points.


Tap Finish Codes Listed

Classic	H51xxx		Chrome	Z00AU
Classic Plus	H55xxx		Chrome	Z00AU
Elite Plus	H5Exxx		Chrome	Z00AU


No more bottled water to buy or store saving time & energy every single day




* Touch-Free Wave Tap available for commercial models only,

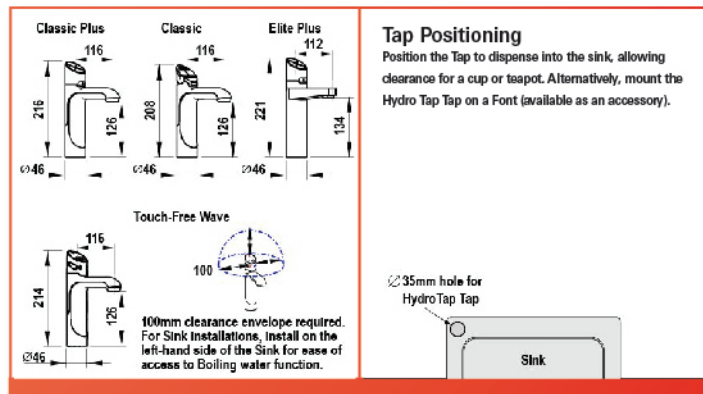

Font options

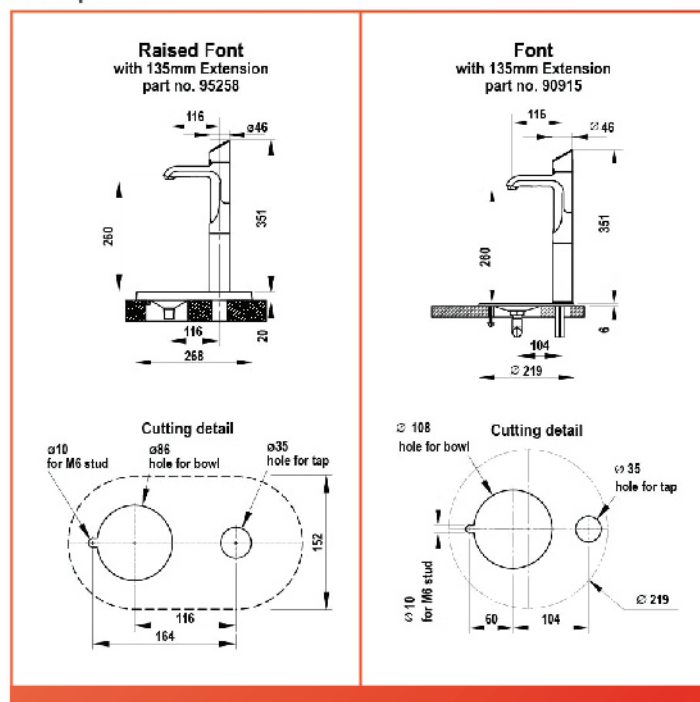


Accessories

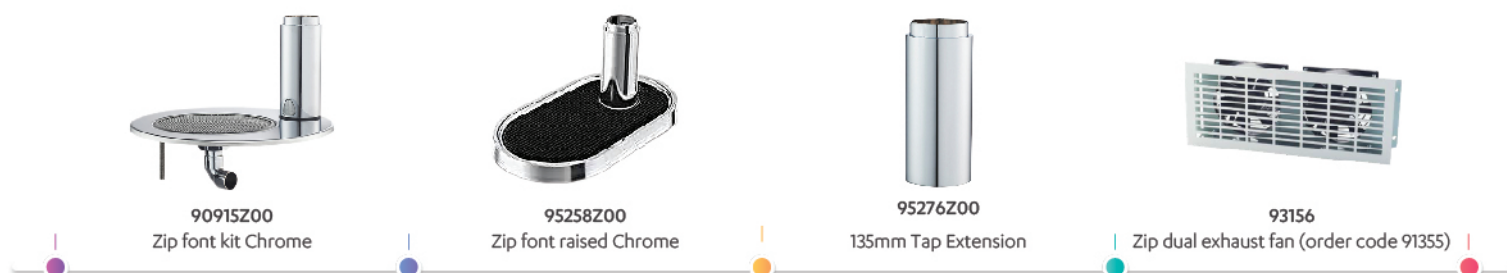

 PowerPulse technology Our innovative Zip Powerpulse technology maintains stored boiling water to within 0.2°C of your set temperature, meaning no energy or time is wasted waiting for water to boil.	 Unique safety features Zip boiling water is delivered smoothly and the tap has a safety lock to facilitate safe boiling water delivery.	 Air-cooled system Our unique air-cooled refrigeration system is 100% water efficient.	 MicroPurity™ filtration Inbuilt 0.2 micron NSF-certified filter incorporating innovative silver ion antimicrobial technology means healthier, pure-tasting water for your workplace.	 Smart Customisation New optimised menu in the G5 HydroTap command centre allows you to select energy modes and usage settings for easier customisation.	 SteriTouch® antimicrobial protection SteriTouch® is impregnated inside materials in contact with key water paths in Hydro Tap for added protection against surface bacteria.	 Touch-Free Technology Zip Hydro Tap Touch-Free Wave uses smart infrared sensors to activate the tap to dispense boiling, chilled and sparkling water, all without touching the tap.	 CO₂ level indicator New feature in the command centre shows when CO ₂ gas is running low.
---	---	---	--	---	--	---	---

Triple Action Technology



1. Removes particulates greater than 5 micron
Pleated membrane pre-filtration
2. Filter reduces lead, chlorine, taste, odour and cycts to 0.2 micron
0.2 micron Fibredyne carbon element including bacteriostatis effect
3. Reduces limescale build up
Limescale inhibitor

Zip MicroPurity filters are certified to reduce chlorine, taste, odour, bacteria, sediment and limescale in line with NSF 42 (aesthetic effects) and WaterMark requirements.

Zip MicroPurity filtration is also certified to deliver a reduction of 99.9% of cysts including cryptosporidium and giardia, and lead reduction of 98.9% to NSF 53 (health effects).



自1987香港經銷：

恒達熱水系統設計有限公司

香港九龍土瓜灣馬頭角道 116 號新寶中心地下高層一號

電話：(852) 2363 2334 傳真：(852) 2764 4034

Website: www.berlin1967.com

Exclusive Agent Since 1987 in Hong Kong:

HANG TAT HEATING SYSTEMS CONSULTANT CO., LTD.

Unit 1, Upper G/F., Newport Centre, 116 Ma Tau Kok Road, To Kwa Wan, Kowloon, Hong Kong.

Tel: (852) 2363 2334 Fax: (852) 2764 4034

Email: sales@berlin1967.com

For more information may visit www.zipwater.com for details