


||||| SIDE ACTING FIRE DOOR SYSTEMS

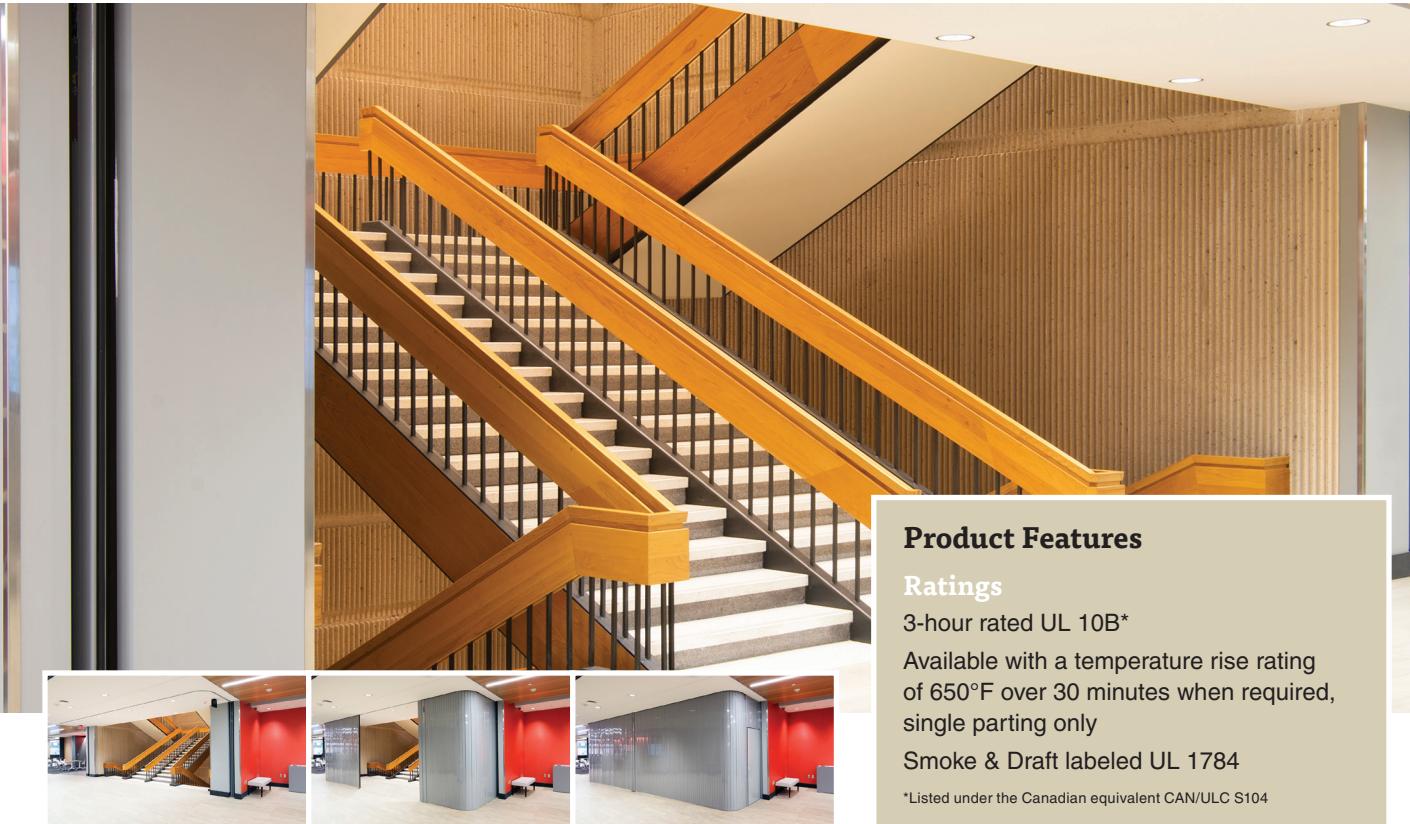

S7000 Series

Side Sliding with & without Egress

S7000 Series fire door systems are available in both manual or motor operated designs and with or without swinging egress doors. S7000 Series doors are side acting therefore ideal for openings in fire walls where headroom is limited. The side activated design enables these fire doors to navigate around tight curves and contoured openings.

Product Features

Ratings

3-hour rated UL 10B*

Available with a temperature rise rating of 650°F over 30 minutes when required, single parting only

Smoke & Draft labeled UL 1784

*Listed under the Canadian equivalent CAN/ULC S104

Code Compliance

CCRR-1086

ADA compliant

Egress

Available with multiple fixed complying swinging egress doors when required

Operation

Auto-Set® automatic resetting

Fail-Safe Design - automatic self-closing mechanism does not require power operation to self-close

Manual operation for assemblies up to 10' x 10'

Size

Widths to 80' (160' bi-parting) and heights to 24'; for larger sizes and custom configurations consult the factory

Negotiates radius curves: 3'-0" with egress doors; 1'-6" without egress doors

Finishes

McKEON Sterling Gray


Powder Coat of any color as selected

Stainless Steel – No. 4 Polish or No. 8

Mirror

S7000

SIDE ACTING FIRE DOOR SYSTEMS

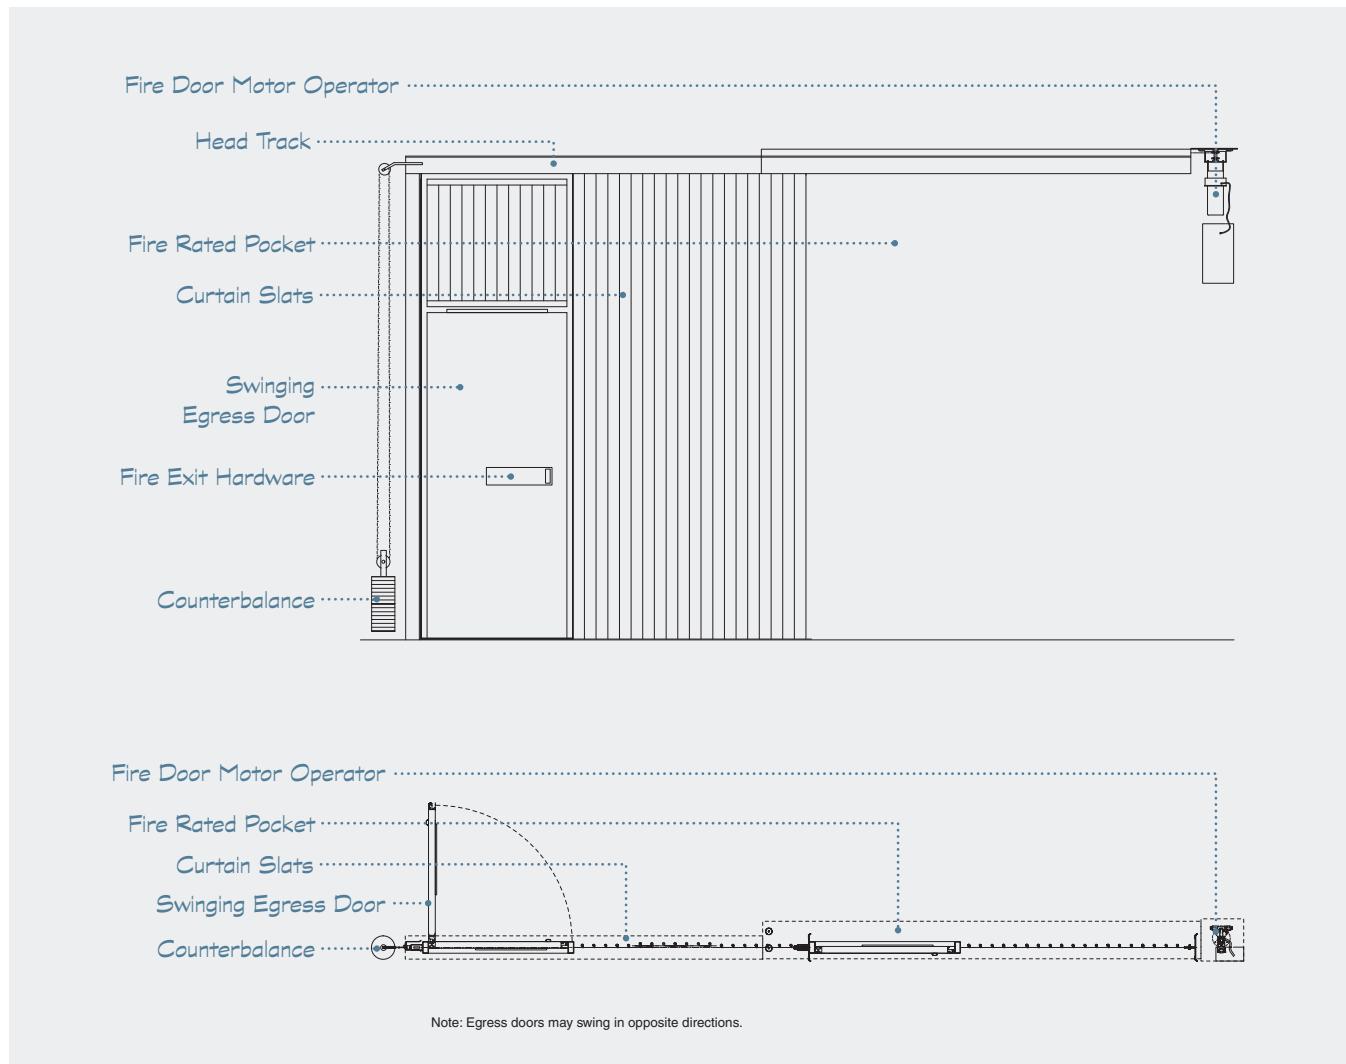

MODEL	OPEN	SELF-CLOSE	EGRESS	FUNCTION
S7200	Manual Push-open	Fail-Safe Mechanical	N/A	Side Sliding
S7400	Manual Push-open	Fail-Safe Mechanical	1 Complying Swing Door*	Side Sliding
S7500	Manual Push-open	Fail-Safe Mechanical	2 Complying Swing Doors*	Side Sliding
S7600	Auto-Set® Power Operator	Fail-Safe Mechanical	N/A	Side Sliding
S7700	Auto-Set® Power Operator	Fail-Safe Mechanical	1 Complying Swing Door*	Side Sliding
S7900	Auto-Set® Power Operator	Fail-Safe Mechanical	Multiple Complying Swing Doors	Side Sliding

*Maximum swing door width is 48"



44 Sawgrass Drive, Bellport, NY 11713 | 800.266.9392 | www.McKeonDoor.com | Info@McKeonDoor.com