
DASH™ & DASH Mini™

Large Display Pocket Digital Thermometer



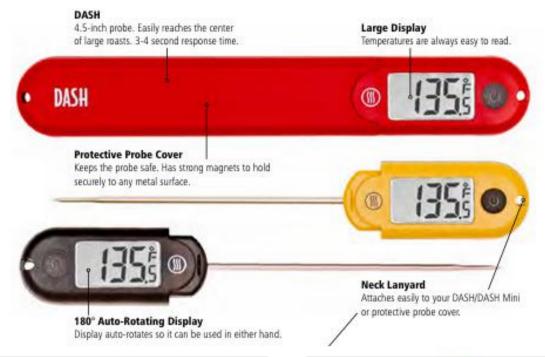

User Calibration

DASH/DASH Mini - Accurate to ±0.9°F from 14 to 212°F (-10 to 100°C). Can be trimmed at a single point for better accuracy.



Calibration Certificate Included

Each DASH/DASH Mini comes with its own NIST-traceable 2-point Cal Cert verifying its accuracy.

Specifications	
Probe Range	-58 to 572°F (-50 to 300°C)
Accuracy	±0.9°F (±0.5°C) between 14 to 212°F (-10 to 100°C) ±4.5°F (±2.5°C) between 392 to 572°F (200 to 300°C) otherwise ±2.7°F (±1.5°C)
Resolution	0.1° over full range
Response	About 3 to 4 seconds
IP Rating	IP67 DISH
Operating Range	32 to 122°F (0 to 50°C)
Probe	DASH: 4.5 L x 0.12 inch dia. reduces to 0.08 inches dia. (114 L x 3.0 mm dia. reduces to 2.0 mm dia.) DASH Mini: 2.8 L x 0.12 inch dia. reduces to 0.08 inches dia. (72 L x 3.0 mm dia. reduces to 2.0 mm dia.)
Probe Auto-Off	
	DASH Mini: 2.8 L x 0.12 inch dia. reduces to 0.08 inches dia. (72 L x 3.0 mm dia. reduces to 2.0 mm dia.)
Auto-Off	DASH Mini: 2.8 L x 0.12 inch dia. reduces to 0.08 inches dia. (72 L x 3.0 mm dia. reduces to 2.0 mm dia.) After 10 minutes, can be disabled
Auto-Off Backlight	DASH Mini: 2.8 L x 0.12 inch dia. reduces to 0.08 inches dia. (72 L x 3.0 mm dia. reduces to 2.0 mm dia.) After 10 minutes, can be disabled 10 seconds
Auto-Off Backlight Battery	DASH Mini: 2.8 L x 0.12 inch dia. reduces to 0.08 inches dia. (72 L x 3.0 mm dia. reduces to 2.0 mm dia.) After 10 minutes, can be disabled 10 seconds CR2032 (3V) lithium coin cell (included) x 1, 5,000 hours
Auto-Off Backlight Battery Display	DASH Mini: 2.8 L x 0.12 inch dia. reduces to 0.08 inches dia. (72 L x 3.0 mm dia. reduces to 2.0 mm dia.) After 10 minutes, can be disabled 10 seconds CR2032 (3V) lithium coin cell (included) x 1, 5,000 hours 0.7 H x 1.3 W inches (18H x 33 W mm) DASH: 7.6 H x 1.2 W x 0.7 D inches (193 H x 31 W x 17.5 D mm)