



CITRAN
COLOR FACTORY®

MONOCOAT

RIVESTIMENTO CONTINUO PER PARETI E
PAVIMENTI








M1



M2

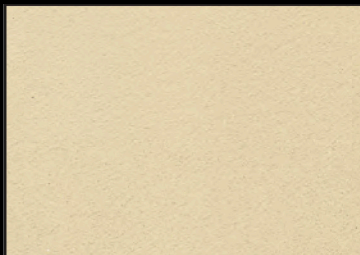


M3




M13




M14

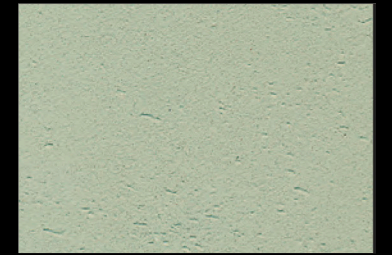


M15

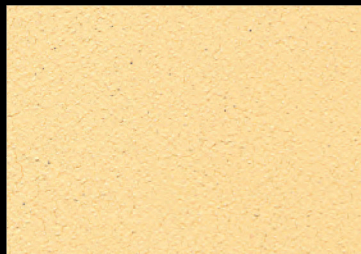


M4

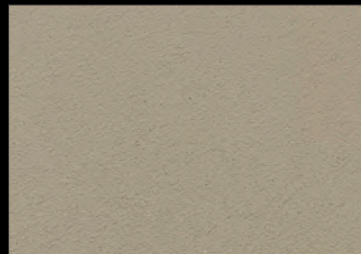

M5

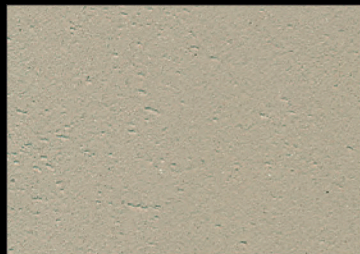

M6

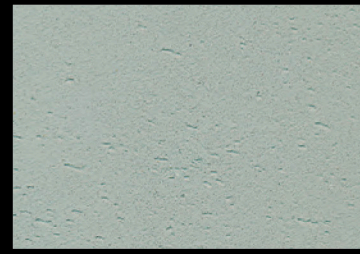

M16



M17



M18



M7



M8



M9



M19



M20



M21



M10




M11



M12



M22

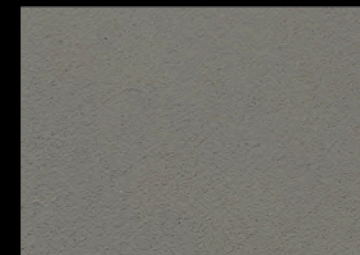

M23



M24



IT. RIVESTIMENTO CONTINUO PER PARETI E PAVIMENTI

Realizzazione di superfici continue su pareti e pavimenti al fine di ottenere ambienti eleganti e di design. MONOCOAT è un rasante mono componente a base acqua e resina poliuretanica per interno ed esterno. Composto per la regolarizzazione di tutte le superfici verticali e orizzontali con altissime prestazioni di adesione e durezza grazie ai suoi inerti silicei selezionati. Livella la struttura al fine di ottenere una finitura continua senza fughe abbinata al sigillante trasparente che lo rende un sistema idrofobo e resistente allo sporco.

MODALITÀ DI APPLICAZIONE

Pulire la superficie da trattare e nel caso di supporto in ceramica, pulire accuratamente con acqua e soda per aprire i pori e procedere con carteggiatura. Stesura di una mano di MONOPRIMER in caso di supporti non assorbenti al fine di garantire maggiore ancoraggio. Applicare due strati di MONOBASE 09 livellante per ottenere un fondo resistente ed uniforme, il quale può essere armato con rete in fibra. Applicare due strati di MONOCOAT ed infine sigillare con due strati di protettivo idrorepellente PU PROTECTION. Evitare l'applicazione in presenza di umidità, di condensa e sotto la presenza del sole diretta. La stesura delle due mani di prodotto va intervallata da un tempo di 6-8 ore. Resa pratica: 1,5-2 Kg/mq
Temperatura di applicazione Min.+5°C/Max +35 °C.

EN. CONTINUOUS COATING FOR WALLS AND FLOORS

Creation of seamless surfaces on walls and floors to achieve elegant, design-oriented environments. MONOCOAT is a single-component skim coat based on water and polyurethane resin, suitable for both interior and exterior use. It is designed for leveling all vertical and horizontal surfaces, offering extremely high adhesion and hardness thanks to its selected silica aggregates. It smooths and levels the substrate to achieve a continuous, joint-free finish, combined with a transparent sealer that makes the system hydrophobic and resistant to dirt.


APPLICATION METHOD

Clean the surface to be treated. In the case of ceramic substrates, clean thoroughly with water and soda to open the pores, then proceed with sanding. Apply one coat of MONOPRIMER on non-absorbent substrates to ensure better adhesion. Apply two coats of MONOBASE 09 leveling compound to obtain a strong and uniform base; it can be reinforced with fiberglass mesh if needed. Apply two coats of MONOCOAT, and finally seal with two coats of water-repellent protective PU PROTECTION. Avoid application in the presence of humidity, condensation, or direct sunlight. Allow 6–8 hours between the application of the two coats. Coverage: 1.5–2 kg/m²
Application temperature: Min. +5°C / Max. +35°C

citran.it



Showroom: Via Castellana, 35
Treviso - 31100 Italia
Sede Produttiva: Via delle industrie, 17
Vacil di Breda di Piave (TV)
31030 Italia
Tel +39 0422 22171
Email: info@citran.it



Made in Italy